



Innovations To Make LIFE SECURE FOR THE NEW INDIA

PRODUCT PORTFOLIO 2023-24

VERSION 1.09



Content

MD's Note	3
AtmaNirbhar CP PLUS	4-5
In-house R&D/Quality Control	6-7
Service Support Centre	8
Customized Solutions designing team	9
Technical Support	10
Mission Tech - Partner Training Program	11
HMS/AMS	12
Product Range	13-50
- CP Silver Series	13-14
- IP Solution	15-23
- Brand Portfolio	24-25
- Guard+ Series	26-27
- Project Series	28-29
- Video Storage	30
- HD Solution	31-33
- Body worn Solution	34
- Mobile DVR Solution	35
- PoE Ethernet Switches	36-37
- Time & Attendance	38-39
- Accessories	40-43
- Network Rack	44-46



MD's Note

Aditya Khemka

Managing Director, CP PLUS

Amidst the continuously rising security concerns, surveillance has become more important than ever today, not only for governments around the world but also for private enterprises, as modern organizations are becoming complex with their people and processes. Effective security must entail more than just selecting the best products & solutions. Now, with the immense amount of Video Analytics, it serves the purpose of not just security but also business intelligence, making CCTV solutions more intelligent & apt for businesses.

CP PLUS has been the No.1 Indian CCTV brand with state-of-the-art manufacturing facilities at Tirupati, Andhra Pradesh, in line with the PM's Vision of AtmaNirbhar Bharat under the Make-in-India initiative. Today 95% of our product line is being produced under 'Make in India' & the company is working towards 100% Localization and Indigenization, in the coming times, backed by its Indian R&D capabilities in both Hardware and Software as well as Video Analytics.

CP PLUS provides a wide range of products & customized solutions that have been meticulously designed for varied applications and vertical segments ranging from Smart & Safe City needs, Commercial establishments, Industries, Housing, Retail, Banking, Education, Hospitality, Healthcare, Police, Real Estate, Transportation, and many more.

Having executed umpteen projects in every vertical segment, and having sold more than Millions of devices, CP PLUS provides tremendous experience and expertise to its customers. Our products can be seamlessly integrated with allied security needs, may it be alarms, fire protection, access control, etc. to present the complete security eco-system to the customers. Our security design experts are highly trained and accomplished professionals, who have executed most of the renowned projects of India. Our R&D Team at CP Plus is dedicated to bring the most effective world-class products to enable a better life for our consumers.

CP PLUS stands committed in creating a Safe & Secure India – a truly "Surakshit Bharat".

Jai Hind!

Road Ahead - Atmanirbhar CP PLUS

World's largest
Manufacturing Facility*

R&D Centers &
Indigenized Products

CP PLUS IoT &
Cloud Platforms

*Researched • Developed •
Manufactured IN BHARAT

**WORLD'S
LARGEST**
CCTV Manufacturing Facility*

**MADE IN
Bharat**



*Selected Models only

*Anywhere outside China



World's Largest CCTV Manufacturing Facility*

- Now to meet the growing global demands, CP PLUS has expanded with another manufacturing unit in Kadapa District, Andhra Pradesh. With this new facility, CP PLUS has tripled its production capacity to more than 3 Million units per month, making it the World's Largest Manufacturing Unit for Surveillance Products outside China.
- With the most advanced high-speed Fuji NXT III SMT lines, numerous HD as well as IP camera assembly lines, offline assembly lines, packaging lines, MI lines, DVR FA lines and an IC programming station, this production facility is the most advanced in the nation.
- Spread over 250,000 sq. Feet, it also comprises of reliability test equipment, dark room for aging test, and many leak test machines.
- As technology is improving in many areas rapidly, our R&D team is working with a renewed passion to come up with products that truly make life easier for people around the world.
- Our in-house R&D team pro-actively caters to the dynamic market demands.


▶ Expanding Capabilities

▶ DNA that encourages competence & competitiveness



In-house R&D team

pro-actively caters to the dynamic market demands

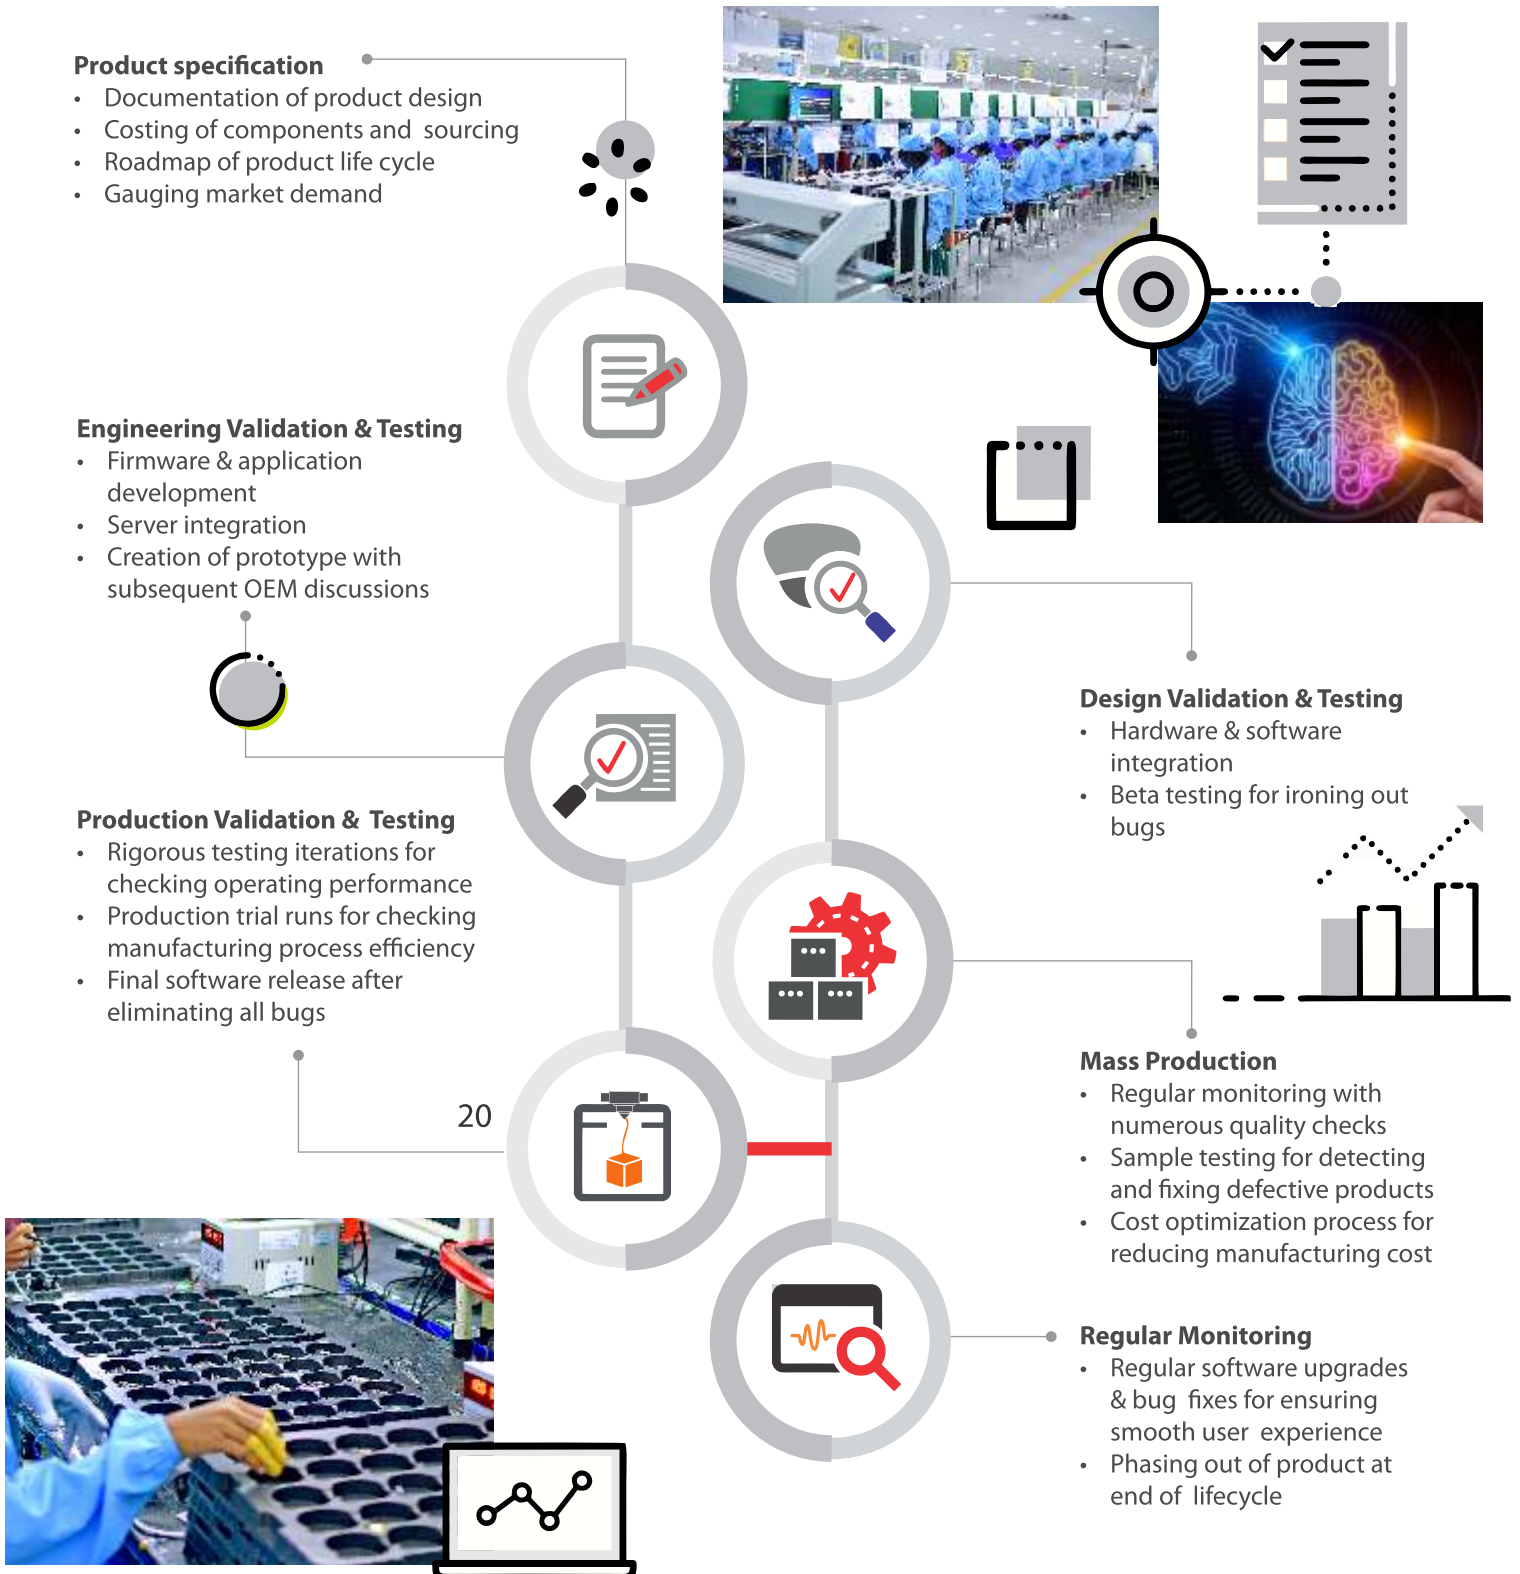


In-house Quality Control

A dedicated in-house quality team ensure focus on quality across the wide spectrum of product offerings



Basic inspection

- Colour
- Housing material
- Matching specifications
- Label printing

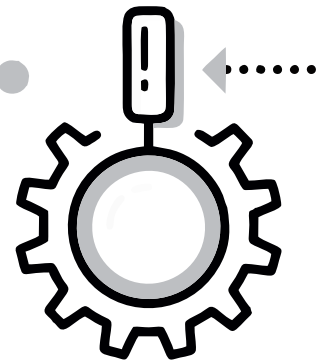


Quality inspection

- Light test
- Lens focus test
- IR board and sensor check
- Water proofing
- Audio test
- Drop test



Packaging inspection

- Camera box printing
- Logo printing
- Carton label check
- Manual check
- Hologram check
- Packaging of right accessories



Detailed report on anomaly

Dedicated 6-8 member team based out of Noida that undertakes the same stringent process



Customer First Always, Every time

Redrawing boundaries to erase them because our bond knows no boundaries or limits. Ours is a brand that stays with you for life. Our job is not just to provide security to your home but to revisualize how the quality of life can be improved in our community because in CP PLUS, the customer always comes first every time. Thus, to extend our hearty support and assistance to you, we are continuously expanding our presence in every corner of the country & beyond while, at the same time, becoming more and more accessible, approachable as well as responsive.



India Presence

- ★ Service/Technical Support Center
- ★ Branch/RMA & SWAP Center

Customized Solutions Designing Team



We have a customized solutions designing team that earnestly crafts tailor-made solutions for all the different verticals ranging from banking to even the oil and gas industry after having done thorough field work and perfectly understanding the specific requirements of any given premises, may it be a shopping mall, a judicial court or entire multi-acred educational institutes. Our designing team is recognized for exceptional technical solutions and with integrated, extensible and flexible designs, they profulfil the evolving business requirements.


**upar wala sab
dekh raha hai**

PROUDLY / MAKING IN INDIA

Devoted Technical Service Support

We have designed, trained and structured the most capable and proficient technical support team to enhance the experience for our customers and resolve their issues instantaneously.


Our support team consists of skilled professionals who provide dedicated support for the entire range of CP PLUS products every weekday. Recognizing the need to be vocal for local in India, we also provide technical support in 12 regional languages to readily cater to the lingual diversity of our country.

 **MISSION TECH**
A CP PLUS Initiative

CP PLUS Certification Training Program For System Integrators & Partners

The security & surveillance industry is on an upswing with a burgeoning need for trained and qualified System Integrators, who can design customized solutions as per the customer's needs, as well as in the most efficient and effective manner. The pace of the industry is such that it requires system integrators to be consistently updated and informed about the latest technological advancements, and the skill sets have to be honed to work with the latest state-of-the-art products and solutions. The CP PLUS Training Program is a step in the direction to provide that much-needed training with an effort to keep our channel partners upskilled and our services relevant.

Local Customize Software Solution

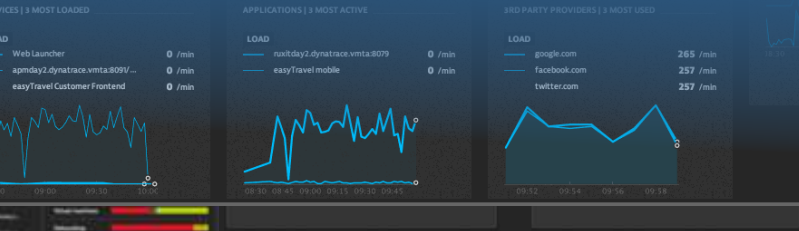

Health Monitoring System (HMS)



Ensuring the smooth functioning of surveillance systems is crucial for the efficiency of a security solution. While monitoring the performance of a small security setup is easily possible, the complex systems that involve multiple cameras and recorders, pose a serious challenge.

The Health Monitoring System by CP PLUS provides a real-time health status of your surveillance devices; it keeps you notified of the perceived critical issues and potential problems such as device going offline, hard drive failure, recording status, network outages, tampering, etc. Investing in the HMS helps you detect system issues automatically. It enables instant reporting of live incidents, reduces system downtime since issues are detected and rectified at the onset and provides daily system supports as well as live status web page view.

CP PLUS provides the HMS solution software which comes complete with live system reporting, alerts and alarms for hard drive failure, recording status, network outages, tampering, etc.

Attendance Monitoring Solution (AMS)



The Attendance Management Solution (AMS) is a cloud-based facilitation tool for employers and employees, to track attendance, leaves, late comings, holidays, leave applications, and conveyance time & costs on a daily/monthly basis.

By simply downloading the AMS application on smart phones, employees can mark their attendance from anywhere, wherein their location and login time is captured using GPS. Employers, on the other hand, can keep a track of the regularity, attendance and punctuality of employees from anywhere, anytime. Ready access to the consolidated data of all employees with regard to their attendance, leaves and conveyance, in one place, helps them generate employee-efficiency reports and computes salaries with ease. AMS effectively plugs the loopholes of traditional tracking systems and provides transparency as well as comfort to both the employer and employees.

INTRODUCING

ALL NEW

Range of
NETWORK CAMERAS

CP Silver

S E R I E S



2/4MP Camera



Built-in Audio



H.265 Codec



Full Color*



Onvif Support*



PoE Support



INTELLIGENT IP SOLUTION



2 MP Distribution Series

CP-UNC-DA21PL3-V3

2MP Full HD IR Network Dome Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream/Smart H.265 Dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA21PL3C-V3

2MP Full HD IR Network Dome Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA21ZPL4-M

2MP Full HD IR Network Dome Camera



- ▶ Features:
- 1/2.7" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm~12mm Motorized lens
- IR Range of 40 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DB21L3C-M

2MP Full HD IR Network Dome Camera



- ▶ Features:
- 1/2.7" 2Megapixel PS CMOS Image Sensor
- Max. 25/30fps@1080P(1920x1080)
- Instastream, H.265 and H.264+ Dual-stream encoding
- DWDR, 3D-DNR, ROI, AWB, AGC, HLC, BLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB21L3-MDS

2 MP Full HD WDR IR Vandal Dome Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- Instastream & H.265 dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, IK10, Micro SD Card, PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21L5C-V/TA21L8C-V

2MP Full HD IR Network Bullet Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 2MP(1920 x 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (6mm, 8mm, optional)
- IR Range of 50/80 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21ZPL5-M

2MP Full HD IR Network Bullet Camera



- ▶ Features:
- 1/2.7" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm~12mm Motorized lens
- IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21PL3-V3

2MP Full HD IR Network Bullet Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream/Smart H.265 Dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP Distribution Series

CP-UNC-TB21L3-MDS

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Max. 25/30fps@2MP (1920×1080)
 - Instastream & H.265 dual-stream encoding
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm Optional)
 - IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21PL3C-V3

2MP Full HD IR Network Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Max. 25/30fps@2MP (1920×1080)
 - Instastream & Smart H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm Optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA41PL3

4MP IR Network Dome Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. Output 4MP(2560 × 1440) @25/30fps
 - Instastream and H.264 dual-stream encoding
 - DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, Ip67
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA41PL3C

4MP IR Network Dome Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. Output 4MP(2560 × 1440)@25/30 fps
 - Instastream and H.264 dual-stream encoding
 - DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA41PL3C-D

4MP WDR IR Network Dome Camera - 30Mtr.



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. 4MP (2560 × 1440)@25/30fps, and 4MP (2688 × 1520)@20fps
 - Instastream & H.265 dual-stream encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm Optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA41ZPL4-MD

4MP WDR IR Network Dome Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. 4MP@25/30fps
 - Instastream & H.265 dual-stream encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AGC, BLC, HLC
 - 2.8mm~12mm Motorized lens
 - IR Range of 40 Mtrs, IP67, Micro SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB41L3-MDS

4 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41PL3

4MP IR Network Bullet Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. Output 4MP(2560 × 1440)@25/30 fps
 - Instastream and H.264 dual-stream encoding
 - DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, Ip67
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41PL3C

4MP IR Network Bullet Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. Output 4MP(2560 × 1440)@25/30 fps
 - Instastream and H.264 dual-stream encoding
 - DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41PL3C-D

4MP WDR IR Network Bullet Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. 4MP (2560 × 1440)@25/30fps, and 4MP (2688 × 1520)@20fps
 - Instastream & H.265 dual-stream encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm Optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41ZPL5-MD

4MP WDR IR Network Bullet Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - Max. 4MP@25/30fps
 - Instastream & H.265 dual-stream encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AGC, BLC, HLC
 - 2.8mm~12mm Motorized lens
 - IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB41L3-MDS

4 MP WDR IR Network Bullet Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 30 Mtrs., IP67, Built-in IR LED, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB41L5-MDS

4MP WDR IR Bullet Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - 4MP (2560 × 1440)@25/30fps
 - Instastream/H.265/H.264+/H.264 triple Stream Video Compression
 - WDR(120dB), Day/Night (ICR), 2D/3D-DNR, AWB, AGC, BLC, HLC
 - 6mm Lens (3.6mm optional)
 - IR Range of 50 Mtrs, IP67, Micro SD Card
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41L5C-D-V3

4MP IR Network Bullet Camera



- Features:
- 1/2.7" 4MP PS CMOS Image Sensor
 - Max. 4MP (2688 × 1520) @20fps
 - Instastream & H.265 dual-stream encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (6mm optional)
 - IR Range of 50 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA41L8C-D-V3

4MP IR Network Bullet Camera



- Features:
- 1/2.7" 4MP PS CMOS Image Sensor
 - Max. 4MP (2688 × 1520) @20fps
 - Instastream & H.265 dual-stream encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (6mm, 8mm optional)
 - IR Range of 80 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

5 MP Distribution Series

CP-UNC-DA51L3C

5MP IR Network Dome Camera



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - Max. 5MP (2880 × 1620)@20fps
 - Instastream & H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

8 MP Distribution Series

CP-UNC-VB51L3-MDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.264+ Dual-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 30 Mtrs, IP67, IK10, Starlight, SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA51L3C

5MP IR Network Bullet Camera



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - Max. 5MP (2880 × 1620)@20fps
 - Instastream & H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB51L3-MDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.264+ Dual-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 30 Mtrs, IP67, Starlight, SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA81L3C

8MP IR Network Dome Camera



- Features:
- 1/2.7" 8MP PS CMOS Image Sensor
 - Max. 8MP (3840 × 2160)@15fps
 - Instastream & H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB81L3-MDS

8 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
 - Instastream & H.264+ Dual-stream encoding
 - Max. 15fps@8MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 30 Mtrs, IP67, IK10, Starlight, SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA81L3C

8MP IR Network Bullet Camera



- Features:
- 1/2.7" 8MP PS CMOS Image Sensor
 - Max. 8MP (3840 × 2160)@15fps
 - Instastream & H.265 dual-stream encoding
 - DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 3.6mm lens (2.8mm optional)
 - IR Range of 30 Mtrs, IP67, PoE
 - Support Built-in Mic
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB81L3-MDS

8 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
 - Instastream & H.264+ Dual-stream encoding
 - Max. 15fps@8MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 30 Mtrs, IP67, Starlight, SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Fisheye

CP-UNC-EE51L1C-VMD

5MP Panoramic Network IR Fisheye Camera



- Features:
- 1/2.7" 5MP progressive scan CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25fps@5MP(2592×1944)
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 1.4mm fixed lens, Built-in Mic, Micro SD Card, PoE
 - IR Range of 10 Mtr.
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2 MP Project Series

CP-UNC-VB21ZL4C-VMDS

2MP Full HD Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream, H.265, Smart H.264+, Dual stream encoding
 - Max. Output 2MP(1920×1080)@25/30fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, HLC, BLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs.
 - Support Built in Mic, Micro SD Card,IP67,IK10, SMD Plus
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB21ZL4-VMDS

2MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 2.7 -13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - Support Starlight Function
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC21ZL4-VMDS

2 MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 2.7 -13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC21ZL4C-VMDS

2MP Full HD WDR Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream and H.264+ triple-stream encoding
 - Max. 2MP (1920×1080)@25/30fps
 - WDR(120dB), Day/Night (ICR), EIS, Defog, 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs
 - Support Built-in Mic, Micro SD Card, IP67, IK10, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC21L5-VMDS

2MP Full HD WDR IR Vandal Dome Camera



- Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
 - Max. 2MP (1920×1080)@30fps
 - Instastream & H.265 triple-stream encoding
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC
 - 3.6mm Lens (2.8mm, 6mm Optional)
 - IR Range of 50 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VD21ZL4C-VMDS

2MP Full HD Network IR Vandal Dome Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - All Instastream, Instastream, H.265, H.264 encoding
 - Max. Outputs 2 MP (1920 × 1080) @50/60fps
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs
 - Built in Mic, Micro SD Card, IP67, IK10, SMD 3.0
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VE21ZL4P-VMD

2MP Full HD WDR IR Network Vandal Dome Camera



- Features:
- 1/1.8" 2Megapixel PS CMOS Image Sensor
 - Instastream/ H.265 / H.264+ / H.264 Quad Stream encoding
 - Max 25/30fps@1080P(1920×1080)
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7mm ~12mm motorized lens
 - IR Range of 40 Mtrs., Micro SD Card IP67, IK10, PoE, ePoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB21ZL6C-VMDS

2MP Full HD Network IR Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream, H.265, Smart H.264+, Dual stream encoding
 - Max. Output 2MP(1920×1080)@25/30fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Support Built in Mic, Micro SD Card, IP67, IK10, SMD Plus
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB21ZL6S-VMDS

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image sensor
 - Max. 25/30fps@2MP (1920×1080)
 - Instastream and H.264+ Encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm~13.5mm Motorized Lens
 - IR Range upto 60 Mtrs, IP67, IK10(Optional), Micro SD Card, PoE
 - Supports Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC21L5C-VMDS

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, PoE, Micro SD Card, Built-in Mic
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC21ZL6C-VMDS

2MP Full HD WDR Network IR Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream and H.264+ triple-stream encoding
 - Max. 2MP (1920×1080)@25/30fps
 - WDR(120dB), Day/Night (ICR), EIS, Defog, 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm- 13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Support Built-in Mic, Micro SD Card, IP67, IK10(optional), PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC21L8-VMDS

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 3.6mm fixed lens (6mm , 8mm, 12mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 80 Mtrs, IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC21ZL6-VMDS

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 2.7 -13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 60 Mtrs, IP67, IK10(Optional), Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TD21ZL5-VMD

2 MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 2.7 -13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, IK10, PoE, Micro SD Card
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TD21ZL6C-VMD

2MP IR Bullet Network Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - AI Instastream, Instastream, H.265, Smart H.264 encoding
 - Max. Output 2MP(1920×1080)@50/60fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Built in Mic, Micro SD Card, IP67, IK10(Optional), SMD 3.0
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE21ZL5P-VMD

2MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/1.8" 2Megapixel PS CMOS Image Sensor
 - Instastream/ H.265 / H.264+ / H.264 Quad-stream encoding
 - Max 25/30fps@1080P(1920×1080)
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7mm ~12mm motorized lens
 - IR Range of 50 Mtrs., Support Micro SD Card IP67, IK10, PoE, ePoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP Project Series

CP-UNC-BE21C-VMDF

2MP Full HD AI WDR Box Camera



- Features:
- 1/1.8" 2Megapixel Progressive scan CMOS
 - Max. 50/60fps@1080P(1920 x 1080)
 - C/CS Mount Lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, Defog, EIS, AWB, AGC, BLC, HLC
 - Instastream and H.264+ triple-stream encoding
 - Auto back focus (ABF) , Support Micro SD Card, PoE
 - 2/1 Alarm in/out, 1/1 audio in/out (Built-in Mic)
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-PD21-VD-V2

2MP Full HD WDR Network Pinhole Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Max. 25/30fps@1080P (1920×1080)
 - 2.8mm Fixed Lens
 - WDR(120dB), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - Smart Instastream and H.264+ dual-stream encoding
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DC41L5C-MDS

4MP WDR IR Network Dome Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, Micro SD Card, PoE, Built-in Mic
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB41ZL4C-VMDS

4MP Network IR Vandal Dome Camera



- Features:
- 1/2.9" 4MP PS CMOS Image Sensor
 - Instastream, Smart H.264, Dual stream encoding
 - Max. Output 4MP(2688 × 1520)@20 fps and 2560 × 1440@25/30 fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs
 - Built in Mic, IP67, IK10, Micro SD Card, SMD Plus
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VB41ZL4-VMDS

4MP WDR IR Network Vandal Dome Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs., IP67, IK10, PoE, Micro SD Card
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC41ZL4-VMDS

4 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs., IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC41ZL4C-VMDS-V2

4MP WDR Network IR Vandal Dome Camera



- Features:
- 1/3" 4 Megapixel PS CMOS Image Sensor
 - AI Instastream, Instastream, H.265 and H.264, triple-stream encoding
 - Max. Output 4MP (2688 × 1520)@25/30fps.
 - WDR(120dB), Day/Night (ICR), SMD 4.0, 3D-DNR, ROI, AWB, AGC, BLC, HLC, EIS
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs
 - Support Built-in Mic, Micro SD Card, IP67, IK10, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC41L5-VMDS

4 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VD41ZL4C-VMDS

4MP Network IR Vandal Dome Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - AI Instastream, Instastream, H.265, H.264 encoding
 - Max. 4 MP (2688 × 1520) @25/30fps
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs
 - Built in Mic, Micro SD Card, IP67, IK10, SMD 3.0
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VG41ZL4-VMD

4MP AI IR Network Vandal Dome Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Max. outputs 4MP(2688×1520)@50fps/60fps
 - 2.7-12mm motorized lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - Instastream /H.265/ Smart H.264+ /H.264 coding
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE+
 - With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB41ZL6-VMDS

4MP WDR IR Network Bullet Camera



- Features:
- 1/3" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 60 Mtrs., IP67, PoE, Micro SD Card,
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB41ZL6C-VMDS

4MP Network IR Bullet Camera



- Features:
- 1/2.9" 4MP Progressive CMOS Image Sensor
 - Instastream, Smart H.264, Dual stream encoding
 - Max. 4 MP (2688 × 1520)@20 fps, 2560 × 1440@25/30 fps
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Built in Mic., Micro SD Card, IP67, IK10 (optional), SMD Plus
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC41L5C-VMDS

4MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.8mm fixed lens (3.6mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, Micro SD Card, PoE, Built-in Mic
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC41ZL6-VMDS

4MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 60 Mtrs., IP67, IK10(optional), Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC41L8-VMDS

4MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 3.6mm fixed lens (6mm, 8mm, 12mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 80 Mtrs., IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TD41ZL5-VMD

4 MP WDR IR Network Bullet Camera



- Features:
- 1/2.8" 4MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@4MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs., IP67, IK10, PoE, Micro SD Card
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TD41ZL6C-VMDS

4MP Network IR Bullet Network Camera



- Features:
- 1/3" 4MP PS CMOS Image Sensor
 - AI Instastream, Instastream, H.265, Smart H.264 encoding
 - Max. 4MP(2688 × 1520)@25/30 fps
 - WDR(120dB), Day/Night (ICR), 3D-NR, ROI, AWB, AGC, HLC, BLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Support Built in Mic, Micro SD Card, IP67, IK10(Optional), SMD 3.0
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-BG41C-VMD

4MP AI Network Box Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Max. outputs 4MP(2688×1520)@50fps/60fps
 - C/CS Mount lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - Instastream/H.265/Smart H.264+/H.264 coding
 - Support Built-in Mic, Micro SD Card, PoE+, ePoE
 - With deep learning algorithm, it supports people counting, face detection, perimeter protection etc
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TG41ZL6-VMD

4MP AI IR Network Bullet Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Max. outputs 4MP(2688×1520)@50fps/60fps
 - 2.7-12mm motorized lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - Instastream /H.265/ Smart H.264+ /H.264 coding
 - IR Range of 60 Mtrs, IP67, IK10, Micro SD Card, PoE+
 - With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE42ZL12P-VMDS

4MP AI WDR IR Network Bullet/Box Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Max. 4MP(2688 x 1520)@30fps
 - Instastream, H.265, Smart H.264+ Triple-Stream encoding
 - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - 10mm~40mm Motorized Lens
 - Support Starlight Function
 - IR Range of 120 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE, SMD 3.0
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

5 MP WDR Project Series

CP-UNC-VB51ZL4-VMDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC51ZL4-VMDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC51ZL4C-VMDS-V2

5MP WDR Network IR Vandal Dome Camera



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - AI Instastream, Instastream and H.265 triple-stream encoding
 - Max. 5MP (2960 × 1668) @20fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7mm-13.5mm Motorized Lens
 - IR Range of 40 Mtrs, Support Built-in Mic, SMD 4.0, AI SSA, Micro SD Card, IP67, IK10, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VC51L5-VMDS

5 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 50 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB51ZL6-VMDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 60 Mtrs, IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

8 MP WDR Project Series

CP-UNC-VB81ZL4-VMDS

8 MP WDR IR Network Vandal Dome Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 15fps@8MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2 MP ePoE Project Series

CP-UNC-VE21ZL4E-VMD

2MP Full HD AI WDR IR Vandal Dome Camera



- Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
 - Instastream/ H.265 / H.264+/ H.264 triple-stream encoding
 - Max 25/30fps@1080P(1920×1080)
 - 2.7mm ~13.5mm motorized lens
 - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs., Support ePoE, PoE, IP67, IK10, Micro SD Card
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE21ZL20E-VMD

2 MP Full HD WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 50/60fps@2MP
 - 5.3mm ~64mm motorized lens
 - WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
 - IR Range of 200 Mtrs, IP67, IK10, Micro SD Card, ePoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC51L5C-VMDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.8 mm fixed lens (3.6mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 50 Mtrs, IP67, Built-in Mic, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-VE81ZL4P-VMDS

8MP AI WDR IR Network Vandal Dome Camera



- Features:
- 1/1.8" 8MP PS CMOS Image Sensor
 - Outputs Max. 8MP (3840×2160)@25/30fps
 - Instastream & H.265 triple-stream encoding
 - Support Starlight Function
 - WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7-12mm Motorized lens, IR Range of 40 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP ePoE Project Series

CP-UNC-VE41ZL4E-VMD

4MP WDR AI IR Network Vandal Dome Camera



- Features:
- 1/1.8" 4Megapixel PS CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max 25/30fps@(2688 × 1520)
 - 2.7mm~12mm Motorized lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - IR Range of 40 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC51ZL6-VMDS

5 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 20fps@5MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 60 Mtrs, IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TB81ZL6-VMDS

8 MP WDR IR Network Bullet Camera



- Features:
- 1/2.7" 8MP CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 15fps@8MP
 - 2.7~13.5mm Motorized lens
 - WDR(120dB), Day/Night(ICR), 3D-DNR,ROI, AGC, BLC,HLC
 - IR Range of 60 Mtrs, IP67, Micro SD Card, PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE21ZL5E-VMD-V2

2MP AI WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@1080P (1920 × 1080)
 - 2.7-13.5mm Motorized lens
 - WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, EIS, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE41ZL5E-VMD-V2

4MP WDR AI IR Bullet Camera



- Features:
- 1/1.8" 4MP PS CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - 25/30fps@(2688 × 1520)
 - 2.7-12mm motorized lens
 - WDR(140dB), Day/Night (ICR), 3D-DNR, Defog, EIS, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TC51ZL6C-VMDS-V2

5MP WDR Network IR Bullet Camera



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - AI Instastream, Instastream and H.265 triple-stream encoding
 - Max. 5MP (2960 × 1668) @20fps
 - WDR(120dB), Day/Night (ICR), 3D-DNR, EIS, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7mm- 13.5mm Motorized Lens
 - IR Range of 60 Mtrs.
 - Support Built-in Mic, SMD 4.0, AI SSA
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE81ZL6E-VMDS

8MP AI WDR IR Network Bullet Camera



- Features:
- 1/1.8" 8MP PS CMOS Image Sensor
 - Outputs Max. 8MP (3840×2160)@25/30fps
 - Instastream & H.265 triple-stream encoding
 - Support Starlight Function
 - WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, AWB, AGC, BLC, HLC
 - 2.7-12mm Motorized lens, IR Range of 60 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TE21ZL15E-VMD-V2

2MP AI WDR IR Network Bullet Camera



- Features:
- 1/2.8" 2MP PS CMOS Image Sensor
 - Instastream & H.265 triple-stream encoding
 - Max. 25/30fps@1080P (1920 × 1080)
 - 5.3~64mm motorized lens
 - WDR(120dB), Day/Night (ICR), 3D-DNR, Defog, ROI, EIS, AWB, AGC, BLC, HLC
 - IR Range of 150 Mtrs, Micro SD Card, IP67, IK10, ePoE, PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

FishEye

CP-UNC-EH4K12L11-VM

12 MP Network Fisheye Camera



- Features:
- 1/1.7" 12MP CMOS Image Sensor
 - H.265 & H.264 triple-stream encoding
 - Max. 25fps@12MP
 - 1.98mm fixed lens
 - DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
 - IR Range of 10 Mtrs., IP67, IK10, PoE, Micro SD Card
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2 MP PTZ Distribution Series

CP-UNP-D2521L10-DP

2MP 25x WDR Network IR PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
 - Max. 25/30fps@1080P
 - 4.8mm~120mm lens (25x Zoom)
 - WDR(120dB), 3D-DNR, Day/Night (ICR), ROI, Defog, AWB, BLC, HLC
 - Instastream, H.265; Smart H.264+; H.264B; H.264M; H.264H; MJPEG (Sub Stream)
 - Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
 - IR Range of 100 Mtr., Built-in 2/1 alarm in/out, IP66, Support PoE+
 - Support Face Detection, SMD Plus
 - Support Starlight Function

CP-UNP-D2521L10-DN

2MP 25x WDR Network IR PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
 - Max. 25/30fps@1080P
 - 4.8mm~120mm lens (25x Zoom)
 - WDR(120dB), 3D-DNR, Day/Night (ICR), ROI, Defog, AWB, BLC, HLC
 - Instastream, H.265; Smart H.264+; H.264B; H.264M; H.264H; MJPEG (Sub Stream)
 - Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
 - IR Range of 100 Mtr., Built-in 2/1 alarm in/out, IP66, Support PoE+
 - Support Face Detection, SMD Plus
 - Support Starlight Function

CP-UNP-F3021L20-DAP

2 MP 30x WDR Network IR PTZ Camera



- Features:
- 1/2.8" CMOS Image sensor
 - Max. 50/60fps@1080P
 - 4.5mm~135mm Lens (30x Zoom)
 - WDR(120dB), 3D DNR, Day/Night(ICR), AWB, AGC, BLC, HLC
 - Instastream /H.265/H.264+ /H.264 dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 200 Mtr., IP67, IK10, PoE+, Auto Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-E2521L15H-DFP

2MP WDR 25x IR Network PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
 - Max. 25/30fps@2MP
 - 4.8mm~120mm Lens (25x zoom)
 - WDR(120dB), 2D/3D-NR, Day/Night (ICR), EIS, Electronic Defog, ROI, AGC, AWB, BLC
 - Instastream, H.265; Smart H.264+; H.264 Triple stream encoding
 - Up to 300 Presets, 5 Auto scan, 8 Tour, 5 Pattern
 - IR Range of 150 Mtr., IP67, IK10, Micro SD Card, PoE+
 - Support Face Detection, SMD 4.0
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4 MP PTZ Distribution Series

CP-UNP-E3221L15H-DFP

2MP WDR 32x IR Network PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
 - Max. 25/30fps@2MP
 - 4.5mm ~ 144mm Lens (32x zoom)
 - WDR(120dB), 2D/3D-NR, Day/Night (ICR), EIS, Electronic Defog, ROI, AGC, AWB, BLC, HLC
 - Instastream, H.265; Smart H.264+; H.264 Triple stream encoding
 - Up to 300 Presets, 5 Auto scan, 8 Tour, 5 Pattern
 - IR Range of 150 Mtr., IP67, IK10, Micro SD Card, PoE+
 - Support Face Detection, SMD 4.0
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F4521L25-DAP

2MP 45x WDR Network IR PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image sensor
 - Max. 50/60fps@2MP
 - 3.95mm~177.7mm Lens (45x Zoom)
 - WDR(120dB), Day/Night(ICR), 2D/3D-DNR, Defog, ROI, EIS, AGC, BLC, HLC
 - Instastream /H.265/H.264+ /H.264 dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 250 Mtr., IP67, IK10, Micro SD Card, Auto Tracking PoE+
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F4521L25-DFP

2MP 45x WDR IR Network PTZ Camera



- Features:
- 1/2.8" 2MP PS CMOS Image sensor
 - Max. 25/30fps@1080P
 - 3.95mm~177.7mm (45x Zoom)
 - WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Defog, ROI, BLC, HLC
 - IR Range of 250Mtr., IP67, IK10, Support PoE+, Built-in 7/2 alarm in/out, Micro SD Card
 - Support Starlight Function
 - Up to 300 presets, 8 tour, 5 pattern, 5 auto scan
 - Support Face detection, SMD Plus, Auto-Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-E3241L15-DFP

4MP WDR 32x IR Network PTZ Camera



- Features:
- 1/2.8" 4MP CMOS Image sensor (0.9071 centimeters)
 - Max. 25/30fps@4MP
 - Powerful 32x Optical zoom and 16x Digital zoom
 - WDR(120dB), 2D/3D-DNR, Day/Night (ICR), EIS, Electronic Defog, ROI, AGC, AWB, BLC, HLC
 - Up to 300 Presets, 5 Auto scan, 8 Tour, 5 Pattern
 - IR Range of 150 Mtr, Built-in 2/1 alarm in/out, IP67, IK10, Micro SD Card, PoE+
 - Support Face Detection
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

5 MP PTZ Project Series

CP-UNP-3051L20A

5MP 30x Network IR PTZ Camera



- Features:
- 1/1.9" 5MP CMOS Image sensor
 - Max. 25/30fps@5MP
 - 6mm~180mm Lens (30x Zoom)
 - DWDR, Day/Night(ICR), 3D DNR, Defog, EIS, ROI, BLC, HLC, AGC
 - H.265/H.264+ /H.264 dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 200 Mtr., IP67, IK10, PoE+, Auto Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Highend PTZ Project Series

CP-UNP-F4521L30-DAP

2MP 45x WDR Network IR PTZ Camera



- Features:
- 1/2.8" CMOS Image sensor
 - Max. 50/60fps@2MP
 - 3.95mm~177.7mm Lens (45x Zoom)
 - WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus, Defog, ROI, EIS, AGC, BLC, HLC
 - Instastream /H.265/H.264+ /H.264 dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 300 Mtr., IP67, Micro SD Card, Auto Tracking Support Hi-PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F4521R55-DAP

2MP 45x Laser WDR Network PTZ Camera



- Features:
- 1/2.8" CMOS Image sensor
 - Max. 50/60fps@2MP
 - 3.95mm~177.7mm Lens (45x Zoom)
 - WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus, Defog, ROI, EIS, AGC, BLC, HLC
 - Instastream /H.265/H.264+ /H.264 dual-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
 - IR Range of 550 Mtr., IP67, Micro SD Card, Auto Tracking Support Hi-PoE
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-F4821L45-DAP

2 MP 48x WDR Network IR PTZ Camera



- Features:
- 1/1.9" 2MP CMOS Image sensor
 - Max. 50/60fps@1080P
 - 5.7mm~275mm Lens (48x Zoom)
 - WDR(120dB), 2D/3D-DNR, ICR, EIS, ROI, Defog
 - Instastream/H.265/H.264+ /H.264 triple-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern
 - IR Range of 450 Mtr., IP67, Hi-PoE, Micro SD Card, Auto Tracking
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-H4041L45-DAP

4MP 40x WDR Network IR PTZ Camera



- Features:
- 1/1.8" 4MP CMOS Image sensor
 - Max. 25/30fps@4MP
 - 5.6mm~223mm Lens (40x Zoom)
 - WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
 - Instastream/H.265/H.264+ /H.264 triple-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern
 - IR Range of 450 Mtr., IP67, Micro SD Card, Auto Tracking, Hi-PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-E3041L15-DAP

4MP 30x WDR Network IR PTZ Camera



- Features:
- 1/3" 4MP PS CMOS Image sensor
 - Max. 25/30fps@4MP
 - Powerful 30x Optical and 16x Digital zoom
 - WDR(120dB), 3D-DNR, Day/Night(ICR), EIS, Defog, ROI, BLC, HLC
 - Up to 300 presets, auto scan, 8 tour, 5 pattern, auto pan, IR Range of 150 Mtr., IP66, Support PoE+
 - Instastream/H.265/H.264+ /H.264 dual stream encoding
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-H4081L45-DAP

8MP 40x WDR Network IR PTZ Camera



- Features:
- 1/1.8" 8MP CMOS Image sensor
 - Max. 25/30fps@4K
 - 5.6mm~223mm Lens (40x Zoom)
 - WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
 - Instastream/H.265/H.264+ /H.264 triple-stream encoding
 - Up to 300 Presets, auto scan, 8 tour, 5 pattern
 - IR Range of 450 Mtr., IP67, Micro SD Card, Auto Tracking, Hi-PoE
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Distribution NVR Series

CP-UNR-104F1/108F1

4/8 Ch. Network Video Recorder



- Features:
- 4/8 channel IP camera input
 - Max 80Mbps Network Bandwidth
 - Instastream/H.265/H.264+/H.264 codec decoding
 - Up to 8MP Resolution
 - Support 1 SATA HDDs up to 8TB, 2 USB Ports
 - HDMI / VGA simultaneous video output
 - Support Multi-brand network cameras
 - ONVIF Version 2.4 conformance
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K2082-V2

8 Ch. 4K H.265 Network Video Recorder



- Features:
- 8 Channel IP Camera Input
 - H.265/H.264 codec decoding
 - Max 80Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 2 SATA HDDs up to 12TB each, 2 USB ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4082-V2

8 Ch. 4K Network Video Recorder



- Features:
- 8 Channel IP Camera Input
 - H.265/H.264 codec decoding
 - Max 80Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 2 SATA HDDs up to 12TB each, 2 USB ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K2161-V2

16 Ch. 4K Network Video Recorder



- Features:
- 16 Channel IP Camera Input
 - H.265/H.264 codec decoding
 - Max 80Mbps incoming bandwidth
 - Support up to 8MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - HDMI / VGA simultaneous video output
 - Support 1 SATA HDDs up to 6TB, 2 USB ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4164-I

16 Ch. 4K Network Video Recorder



- Features:
- Up to 16 channel IP camera input
 - Access, storage or forwarding at 256 Mbps (160 Mbps when AI function enabled)
 - Instastream/H.265/Smart H.264+/H.264/MJPEG
 - AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus
 - AI by Camera: Face detection and recognition, perimeter protection; SMD Plus; ANPR; people counting; stereo analysis; heat map
 - Support 4 SATA HDDs up to 10TB Each, 2 USB Ports
 - 1 HDMI / 1 VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4162-V3

16 Ch. H.265 4K Network Video Recorder



- Features:
- 16 channel IP camera input
 - Instastream/H.265/H.264+/H.264
 - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - VGA/HDMI simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4322-V3

32Ch. H.265 4K Network Video Recorder



- Features:
- 32 channel IP camera input
 - Instastream/H.265/H.264+/H.264 codec decoding
 - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
 - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4324-I

32 Ch. H.265 4K Network Video Recorder



- Features:
- 32 channel IP camera input
 - Access, storage or forwarding at 256 Mbps (160 Mbps when function enabled)
 - Support 4 SATA HDDs up to 10TB Each, 2 USB Ports
 - AI by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K5644-V2

64 Ch. H.265 4K Network Video Recorder



- Features:
- 64 channel IP camera input
 - Instastream/H.265/H.264+/H.264/MJPEG
 - Max 320Mbps incoming bandwidth
 - Up to 12MP resolution preview and playback
 - Support 4 SATA HDDs up to 10TB Each, 3 USB Ports (2 USB 3.0, 1 USB 2.0)
 - 2 HDMI / 2 VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K564R8-V2

64 Ch. H.265 4K Network Video Recorder



- Features:
- 64 Channel IP Camera Input
 - H.265/H.264/MJPEG/MPEG4 codec decoding
 - Max 320Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - 2 HDMI / VGA simultaneous video output
 - Support 8 SATA HDDs up to 48TB, 4 USB(2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K564R8-FI

64Ch. AI Network Video Recorder



- Features:
- Up to 64 channel IP camera input
 - Instastream/H.265/Smart H.264+/H.264/MJPEG codec decoding
 - Max. 384 Mbps incoming/recording/outgoing bandwidth
 - AI by Recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus
 - Support 8 SATA HDDs up to 16TB Each, 4 USB Ports (2 USB 3.0), Support RAID 0/1/5/6/10
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Project NVR Series

CP-UNR-4K632R8/4K664R8-V2

32/64 Ch. H.265 4K Network Video Recorder



- Features:
- 32/64 Channel IP Camera Input
 - H.265/H.264 dual codec decoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - Support 8 SATA HDDs up to 64TB, 4 USB ports, 1 eSATA port, Support RAID 0/1/5/6/10/50/60
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K664R8-EV2

64 Ch. H.265 4K Network Video Recorder



- Features:
- 64 Channel IP Camera Input
 - H.265/H.264/MJPEG codec decoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support 8 SATA HDDs up to 8TB Each, 4 USB (2 USB 2.0, 2 USB 3.0), Support RAID, 1 eSATA port, 1 RS485, 1 RS232, Support hot-Swap, Redundant power supply module adopted
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K664R16-EV2

64 Ch. H.265 4K Network Video Recorder



- Features:
- 64 Channel IP Camera Input
 - H.265/H.264/MJPEG codec decoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support 16 SATA HDDs up to 8TB Each, 4 USB (2 USB 2.0, 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port, 1 RS485, 1 RS232, Support hot-Spare, Redundant power supply module adopted
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K532R8-V2

32 Ch. H.265 4K Network Video Recorder



- Features:
- 32 Channel IP Camera Input
 - H.265/H.264/MJPEG/MPEG4 codec decoding
 - Max 320Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - 2 HDMI / VGA simultaneous video output
 - Support 8 SATA HDDs up to 48TB, 4 USB(2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K6128R8-V2

128 Ch. H.265 4K Network Video Recorder



- Features:
- 128 Channel IP Camera Input
 - H.265/H.264/MJPEG codec decoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support 8 SATA HDDs up to 48TB, 4 USB(2USB3.0, 2USB2.0), Support RAID 0/1/5/6/10, 1 eSATA Port, 1 RS485, 1 RS232, Support Hot-Swap
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K6128R16-V2

128 Ch. H.265 4K Network Video Recorder



- Features:
- 128 Channel IP Camera Input
 - H.265/H.264/MJPEG dual-stream encoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - 2 HDMI / VGA simultaneous video output
 - Support 16 SATA HDDs up to 96TB, 4 USB (2 USB 2.0 , 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port , Support 16 hot-swap HDDs
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K6128R16-EV2

128 Ch. H.265 4K Network Video Recorder



- Features:
- 128 Channel IP Camera Input
 - H.265/H.264/MJPEG dual-stream encoding
 - Max 384Mbps incoming bandwidth
 - Support up to 12MP Resolution Preview & Playback
 - Support Multi-brand network cameras
 - 2 HDMI / VGA simultaneous video output
 - Support 16 SATA HDDs up to 96TB, 4 USB (2 USB 2.0 , 2 USB 3.0), Support RAID, Support iSCSI & Mini SAS, 1 eSATA port , Support 16 hot-swap HDDs, Redundant power supply module adopted
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K5082-FI

8Ch. 4K AI Network Video Recorder



- Features:
- Up to 8 channel IP camera input
 - Max. 384 Mbps incoming/recording/outgoing bandwidth
 - Instastream/H.265/Smart H.264+/H.264/MJPEG codec decoding
 - AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus
 - AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports (1 USB 3.0)
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K5162-FI

16Ch. 4K AI Network Video Recorder



- Features:
- Up to 16 channel IP camera input
 - Max. 384 Mbps incoming/recording/outgoing bandwidth
 - Instastream/H.265/Smart H.264+/H.264/MJPEG codec decoding
 - AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus
 - AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports (1 USB 3.0)
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

PoE NVR

CP-UNR-4K5322-FI

32Ch. 4K AI Network Video Recorder



- Features:
- Up to 32 channel IP camera input
 - Max. 384 Mbps incoming/recording/outgoing bandwidth
 - Instastream/H.265/Smart H.264+/H.264/MJPEG codec decoding
 - AI by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus
 - AI by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports (1 USB 3.0)
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4042-P4V3

4Ch. H.265 4K Network Video Recorder with 4PoE Port



- Features:
- 4 channel IP camera input
 - Instastream/H.265/H.264+/H.264/MJPEG
 - Max. decoding capability: 4 x 1080p@30fps. Supports adaptive decoding
 - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 4 PoE Ports
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4082-P8V3

8Ch. H.265 4K Network Video Recorder with 8 PoE Port



- Features:
- 8 channel IP camera input
 - Instastream/H.265/H.264+/H.264/MJPEG
 - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
 - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 8 PoE Ports
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNR-4K4162-P16V3

16Ch. H.265 4K Network Video Recorder with 16 PoE Ports



- Features:
- 16 channel IP camera input
 - Instastream/H.265/H.264+/H.264
 - Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
 - AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD, Support 16 PoE Ports
 - Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

A Portfolio with a Truly Extensive Range of Products

We are much more than a surveillance brand. We are the future of smart living, smart business operations. We are here to take you to the smart age where India shall lead the way for the world and so we promise to never stop adding more products to our extensive portfolio.



The Widest Product Portfolio

- HD DVR/NVR
- HD CCTV Camera
- 4G & Flood Light Camera
- Network CCTV Camera
- Speed Dome
- Home Security Camera
- Surveillance Software
- Video Door Phone
- Time & Attendance
- Mobile DVR
- Anti-Corrosion Camera
- Monitors
- 4G Router
- Thermal Camera
- Body Worn
- PoE Switch
- Cable
- Power Supply
- Video Door Bell
- Smart Door Locks
- DVR Rack
- Dash Cam
- Baby Monitors
- Interactive Display
- SD Card



INTELLIGENT GUARD+ SERIES



2 MP - Network Series

CP-UNC-DA21L2-GP-V3

2MP Full-color Network Dome Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. 2MP(1920 x 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm optional)
- Illumination Range of 20 Mtrs., IP67, PoE
- Built-in LEDs
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

CP-UNC-TA21L2-GP-V3

2MP Full-color Network Bullet Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. 2MP(1920 x 1080)@25/30fps
- Instastream & H.265 dual-stream encoding
- DWDR, 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm optional)
- Illumination Range of 20 Mtrs., IP67, PoE
- Built-in LEDs
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

CP-UNC-DA21L2C-GP-V3

2MP Full-color Network Dome Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. Output 2MP(1920 x 1080)@25/30fps
- Instastream, H.265 and H.264 dual-stream encoding
- DWDR, 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built in Mic, Built-in LEDs, Support IP67, PoE
- Illumination Range 15 Mtrs.
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-TA21L2C-GP-V3

2MP Full-color Network Bullet Camera



- ▶ Features:
- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max. Output 2MP(1920 x 1080)@25/30fps
- Instastream, H.265 and H.264 dual-stream encoding
- DWDR, 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built in Mic, Built-in LEDs, Support IP67, PoE
- Illumination Range 15 Mtrs.
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

4MP - Network Series

CP-UNC-TA41L2C-GP

4 MP Full-color Network Bullet Camera



- ▶ Features:
- 1/3" 4MP PS CMOS Image Sensor
- Max. Output 4 MP (2560 x 1440)@25/30fps
- Instastream, H.265, H.264, dual-stream encoding
- WDR(120dB), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built-in Mic
- Illuminator Range of 15 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNC-DA41L2C-GP

4 MP Full-color Network Dome Camera



- ▶ Features:
- 1/3" 4MP PS CMOS Image Sensor
- Max. Output 4 MP (2560 x 1440)@25/30fps
- Instastream, H.265, H.264, dual-stream encoding
- WDR(120dB), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- Built-in Mic
- Illuminator Range of 15 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

2.4 MP - Analog Series

CP-GPC-DA24PL2-SE

2.4MP Full-color Dome Camera - 20Mtr.



- ▶ Features:
- 1/2.8" 2.4MP CMOS Image Sensor
- Max. 30fps@2.4MP
- 3.6mm Lens (2.8mm Optional)
- CVI/CVBS/AHD/TVI switchable
- DWDR, 2D-DNR, AWB, AGC, BLC, HLC
- Illumination Range of 20 Mtrs, Ip67
- Support Full-color Starlight

CP-GPC-DA24PL2C-SE

2.4MP Full-color Dome Camera - 20Mtr.



- ▶ Features:
- 1/2.8" 2.4MP CMOS Image Sensor
- Max 25/30fps@2.4MP
- 3.6mm Fixed lens (2.8mm Optional)
- CVI/CVBS/AHD/TVI switchable
- DWDR, 2D-DNR, AWB, AGC, BLC
- Illumination Distance of 20 Mtrs, IP67
- Support Built-in Mic

5MP - Analog Series

CP-GPC-TA24PL2-SE

2.4MP Full-color Bullet Camera - 20Mtr.



- ▶ Features:
 - 1/2.8" 2.4MP CMOS Image Sensor
 - Max. 30fps@2.4MP
 - 3.6mm Lens (2.8mm Optional)
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, Ip67
 - Support Full-color Starlight

CP-GPC-TA24PL2C-SE

2.4MP Full-color Bullet Camera - 20Mtr.



- ▶ Features:
 - 1/2.8" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 3.6mm Fixed lens (2.8mm Optional)
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC
 - Illumination Distance of 20 Mtrs, IP67
 - Support Built-in Mic

CP-GPC-T24L4-V5

2.4MP Full HD Bullet Camera - 40 Mtr.



- ▶ Features:
 - 1/2.9" 2.4MP CMOS Image Sensor
 - Max 25/30fps@2.4MP
 - 3.6mm lens (6mm Optional)
 - Support low illumination, warm light day night full color
 - DWDR, 2D/3D-DNR, AWB, AGC, BLC
 - Illumination Range of 40 Mtr., IP66

CP-GPC-DA50PL2-SE

5MP Full-color Dome Camera - 20Mtr.



- ▶ Features:
 - 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 3.6mm Lens
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, IP67
 - 24/7 color imaging

CP-GPC-DA50PL2C-SE

5MP Full-color Dome Camera - 20Mtr.



- ▶ Features:
 - 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 3.6mm Lens
 - Built-in Mic
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, Ip67
 - 24/7 color imaging

CP-GPC-TA50PL2-SE

5MP Full-color Bullet Camera - 20Mtr.



- ▶ Features:
 - 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 3.6mm Lens
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, IP67
 - 24/7 color imaging

CP-GPC-TA50PL2C-SE

5MP Full-color Bullet Camera - 20Mtr.



- ▶ Features:
 - 1/2.7" 5MP CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 3.6mm Lens
 - Built-in Mic
 - CVI/CVBS/AHD/TVI switchable
 - DWDR, 2D-DNR, AWB, AGC, BLC, HLC
 - Illumination Range of 20 Mtrs, Ip67
 - 24/7 color imaging

Multi Lens Camera with 180° View
Outdoor Area

1. Time & Attendance
2. People Counting
Bank Entrance

Fish Eye Camera
Reception / Lobby Area


Pin Hole & Dome Camera with Sensor Integration
ATM

Intelligent Surveillance for Banking

4 MP camera with Motion Alert
Vault Area

60fps Camera with Panic Button & Two-Way Communication
Cash Transaction Counter

SYSTEM ARCHITECTURE

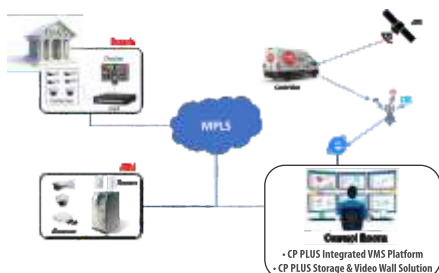

KEY FEATURES

- ▶ 180° Multi Lens Camera with 180° View & People Counting
- ▶ Face Recognition, People Counting & Ultra WDR Camera
- ▶ Remote Monitoring & Evidence Management
- ▶ Customer traffic statistics
- ▶ ATM Text Overlay
- ▶ Smart Transaction Record
- ▶ Sensor Integration
- ▶ Behaviour Analytics

Project Series



Thermal Cameras

CP-NNC-D2421

Thermal & Optical Network Dome Camera



- ▶ Features:
 - Uncooled VOx Micro bolometer with 256×192 resolution
 - Thermal Camera: 3.5 mm/7 mm fixed lens, Visible camera: 4 mm/8 mm fixed lens
 - Built-in microphone and speaker, support sound-light alarm
 - IR distance up to 35m~50mtr
 - Support Built-in Microphone & Built-in Speaker
 - SD Card up to 256GB

CP-NNC-T2521

Thermal & Optical Network Bullet Camera



- ▶ Features:
 - Uncooled VOx Micro bolometer with 256×192 resolution
 - Thermal Camera: 7mm/10mm fixed lens optional, Optical camera: 8 mm fixed lens
 - Support human, vehicle, smoking, fire point, smoke and fire detection
 - IR distance up to 55mtr
 - Support Built-in Speaker
 - SD Card up to 256GB

CP-NNC-T6461

Thermal & Optical Network Bullet Camera



- ▶ Features:
 - VOx uncooled focal plane detector with 640×512 resolution
 - Thermal: 9/15/25/35/50 mm fixed lens, optical: 4/6/10~30mm lens optional
 - Support human, vehicle and fire point detection
 - IR distance up to 100m
 - Support temperature monitoring and exception alarm
 - SD Card up to 256GB
 - Support Built-in Microphone & Built-in Speaker

CP-UNC-T421H

Thermal Network Hybrid Bullet Camera



- ▶ Features:
 - Vanadium oxide uncooled focal plane detector
 - 4MP Progressive scan CMOS Image Sensor (Visible)
 - Built-in white light and speaker that produce light and sound alarms to deter intruders
 - Built-in IR LED with a maximum illumination distance of 35Mtr
 - Dual image fusion (visible and thermal images).
 - IP67 Rating
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Explosion-proof Cameras

CP-UNP-Z6481H-T

Thermal Network Mini Hybrid Pan & Tilt Camera



- ▶ Features:
 - Vanadium oxide uncooled focal plane detector
 - 1/1.8" 4Megapixel progressive scan CMOS
 - Support tripwire, intrusion, and human/vehicle classification
 - Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
 - Temperature measurement range of -20 °C to +550 °C
 - IR Distance: 100Mtr., Support Micro SD Card, IP66
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-CNV-ST51ZL10-VMDF

SMP 30x Explosion-Proof Network Camera



- ▶ Features:
 - 1/2.8" Progressive Scan CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 5.3mm~ 159mm Lens (30x zoom)
 - WDR(120dB), Day/Night(ICR), Defog, EIS, AGC, AWB, BLC, HLC
 - H.265 / H.264 / MJPEG Video Compression
 - Up to 300 Presets
 - IP68, Micro SD Card, 316L Stainless Steel

CP-PNV-S3051L20-F

SMP 30x Explosion-Proof Network PTZ Camera



- ▶ Features:
 - 1/2.8" Progressive Scan CMOS Image Sensor
 - Max. 25/30fps@5MP
 - 5.3mm~ 159mm Lens (30x zoom)
 - WDR(120dB), Day/Night(ICR), Defog, EIS, AGC, AWB, BLC, HLC
 - H.265 / H.264 / MJPEG Video Compression
 - Up to 400 Presets, Tour (upto 12), Scan (upto 12), Pattern (upto 6)
 - IP68, Micro SD Card, 316L Stainless Steel

CP-UNC-ST21ZL10-VMDF

2MP 30x Explosion-proof IR Network Camera



- ▶ Features:
 - 1/2.8" 2MP PS CMOS Image sensor
 - Max. 50/60fps@1080P
 - Powerful 30x Optical zoom and 16x Digital zoom
 - WDR(120dB), 2D/3D DNR, Day/Night (ICR), ROI, EIS, Defog, AGC, BLC, HLC
 - 304 stainless steel housing
 - H.265 Video Compression
 - IR distance up to 100mtr., IP68
 - Support Starlight Technology
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-S3021L10-D

2MP 30x Explosion-proof IR Network PTZ Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), 2D/3D-DNR, Defog, EIS, Day/Night (ICR), AGC, BLC, HLC
- 316L Stainless Steel Housing
- H.265 Video Compression
- Up to 256 presets, 5 Scan, 8 Tour
- IR Range of 100 Mtr., Built-in 2/1 alarm in/out, IP68
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-S3021-D

2MP 30x Explosion-proof Network Positioning PTZ Camera



- ▶ Features:
- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- WDR(120dB), 2D/3D DNR, Day/Night (ICR), ROI, EIS, Defog, AGC, BLC, HLC
- 316L Stainless Steel Housing
- Instastream/H.265/H.264+/H.264
- Up to 256 Presets, 5 auto scan, 8 tour
- Built-in 2/1 alarm in/out, IP68
- Starlight Technology
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Anti-Corrosion PTZ Cameras

CP-UNP-F3021U-DAP

2MP 30x WDR Anti-Corrosion Network PTZ Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 4.5mm~135mm Lens (30x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- 316L Stainless Steel, IP68, IK10, Micro SD Card, Auto Tracking, IVS, NEMA 4X, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-Z3021U-D

2MP 30x WDR Anti-Corrosion IR Network Camera



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 4.5mm~135mm Lens (30x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- 316L Stainless Steel, IR Range of 100 Mtr., IP68, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Positioning PTZ Cameras

CP-UNP-P4521L35-DAP

2MP 45x WDR Network IR Positioning System



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 3.95mm~177.7mm Lens (45x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 350 Mtr., IP68, Micro SD Card, Auto Tracking, IVS, NEMA 4X, Hi-PoE
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-P4821L45-DA

2MP 48x WDR Network IR Positioning System



- ▶ Features:
- 1/1.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 5.7mm~275mm Lens (48x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 450 Mtr., IP66, Micro SD Card, Auto Tracking, IVS
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-P4821L93-DA

2MP 48x WDR Network Laser Positioning System



- ▶ Features:
- 1/1.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 5.7mm~275mm Lens (48x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- Laser Range of 1200 Mtr., IP66, Micro SD Card, Auto Tracking, IVS, Wiper
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-P2521L15-DAP

2MP 25x WDR Network IR Positioning System



- ▶ Features:
- 1/2.8" 2MP CMOS Image sensor
- Max. 50/60fps@2MP
- 4.8mm~120mm Lens (25x Zoom)
- WDR(120dB), ICR, 2D/3D-DNR, Defog, ROI, EIS
- Instastream/H.265/H.264+/H.264 triple-stream
- Up to 300 Presets, auto scan, 8 tour, 5 pattern
- IR Range of 150 Mtr., IP67, IK10, Micro SD Card, Auto Tracking, IVS, PoE+
- Support Starlight Function
- Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

Radar

CP-UA-R6

Narrow Wave Radar



- ▶ Features:
- Support two-way speed measuring, High measure accuracy
- Support high speed/ low speed detection, with wide speed range
- Narrow wave plate antenna design
- Working parameters can be set flexible, with high sensitivity
- Measure Range: 10km/h ~ 250km/h

CP-AR-3D

3D Radar



- ▶ Features:
- Maximum detectable distance to a vehicle: 150Mtr.
- Minimum detectable distance to a vehicle: 10Mtr
- MTBF ≥ 30 000 hours
- 1 RS485 Port
- Support IP67

CP-AR-4D

4D Radar



- ▶ Features:
- Maximum detectable distance to a vehicle: 150Mtr.
- Minimum detectable distance to a vehicle: 10Mtr
- MTBF ≥ 30 000 hours
- 1 RS485 Port
- Support IP67
- Vehicle : Bike, Car, Truck, Long Truck

VIDEO STORAGE



Video Storage

CP-UVS-6167R-V2

16-HDD Enterprises Video Storage



- ▶ Features:
 - Max 320 IP Camera Inputs
 - 16 HDDs, SATA, Hot-Swap
 - Max 800Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
 - Redundant Power Supply

CP-UVS-6247R-V2

24-HDD Enterprise Video Storage



- ▶ Features:
 - Max 512 IP Camera Inputs
 - 24 HDDs, SATA, Hot-Swap
 - Max 1024Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
 - Redundant Power Supply

CP-UVS-G24R-D

24-HDD Enterprise Video Storage with Dual Controller



- ▶ Features:
 - Max 512 IP Camera Inputs
 - Dual Controller architecture
 - 24 HDDs, SAS, Hot-Swap
 - Max 1024Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
 - Redundant Power Supply
 - Support standard iSCSI Protocol Storage
 - 24 HDDs, Up to 10 TB capacity for each HDD

CP-UVS-6367R-V2

36-HDD Enterprise Video Storage



- ▶ Features:
 - Max 320 IP Camera Inputs
 - 36 HDDs, SATA, Hot-Swap
 - Max 640 Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Redundant Power Supply
 - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
 - 320-channel (640Mbps) incoming and recording, 160-channel (320Mbps) forwarding, 32-channel (64Mbps) playback

CP-UVS-6487R-V2

48-HDD Enterprise Video Storage




- ▶ Features:
 - Max 320 IP Camera Inputs
 - 48 HDDs, SATA, Hot-Swap
 - Max 640Mbps Incoming/recording Bandwidth
 - iSCSI and Mini SAS for Expanded Storage Space
 - Supports RAID 0/1/3/4/5/6/10/50/60/JBOD, Hotspare
 - Redundant Power Supply
 - Support standard iSCSI Protocol Storage

CP-UVS-G48R-D2

48-HDD Embedded Video Storage



- ▶ Features:
 - Max 512 IP Camera Inputs
 - Max 1024 Mbps incoming/recording/forwarding bandwidth
 - Dual-controller, Active-Active, 64-bit High-performance multi-core processor
 - Supports RAID 0/1/5/6/10/50/60, JBOD, Hot spare
 - 1+1 redundant 80PLUS platinum power supply
 - Supports Automatic Network Replenishment (ANR), SAS cascade for expanded storage space

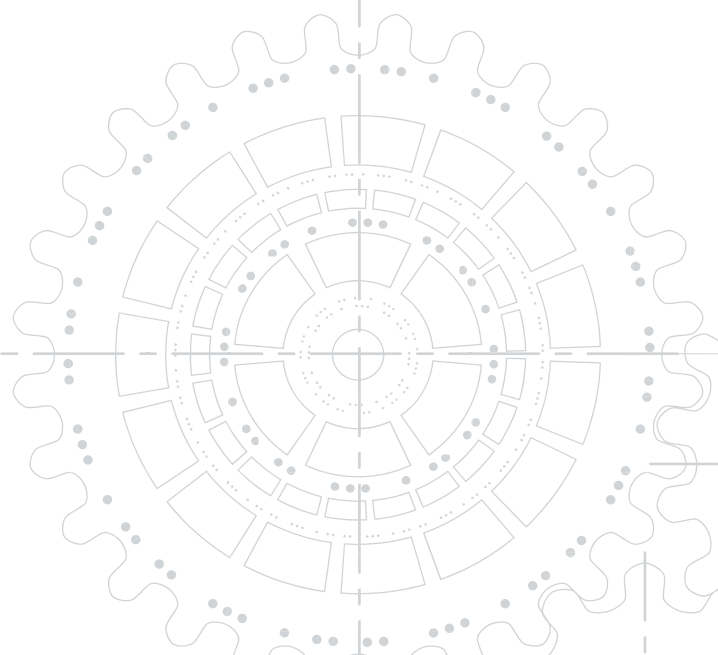

ALL-IN ONE HD SOLUTION



2.4 MP Series

CP-USC-DA24L2

2.4MP IR Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
- HD and SD output switchable
- Max 25/30fps@2.4MP(1928×1088)
- 3.6mm fixed lens (6mm optional)
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), AWB, AGC, BLC
- Max. IR LEDs length 20m

CP-URC-DC24PL2-V3

2.4MP Full HD IR Dome Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
- Max. 30fps@2.4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm Lens (2.8mm, 6mm Optional)
- Max. IR length 20 Mtr.
- HD and SD output switchable

CP-URC-DC24PL2C-V3

2.4MP IR Dome Camera - 20Mtr.



- Features:
- 1/2.7" 2.4MP CMOS Image Sensor
- Max 25/30fps@2.4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 20 Mtrs., Smart IR
- Support Built-in Mic
- OSD Menu, control over coaxial cable, 2D-DNR
- HD, SD and Two Analog format Output switchable

CP-URC-TC24PL2-V3

2.4MP Full HD IR Bullet Camera - 20 Mtr.



- Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
- Max. 30fps@2.4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm Lens (6mm Optional)
- Max. IR length 20 Mtr., IP67
- HD and SD output switchable

CP-URC-TC24PL2C-V3

2.4MP IR Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 2.4MP CMOS Image Sensor
- Max 25/30fps@2.4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 20 Mtrs., Smart IR, IP67
- Support Built-in Mic
- OSD Menu, control over coaxial cable, 2D-DNR
- HD, SD and Two Analog format Output switchable

CP-USC-TD24FL6-V3

2.4MP IR Bullet Camera - 60Mtr.



- Features:
- 1/2.7" 2.4MP PS CMOS Image Sensor
- Max 25/30fps@2.4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 2.7mm~12mm Vari-focal Lens
- IR Range of 60Mtrs., Smart IR, IP67
- OSD Menu, control over coaxial cable, 2D-DNR
- HD, SD and Two Analog format Output switchable

CP-USC-TA24L8C

2.4MP IR Bullet Camera - 80 Mtr.



- Features:
- 1/2.7" 2.4 MP CMOS Image sensor
- HD and SD output switchable
- Max 25/30fps@2.4MP(1928×1088)
- 3.6mm fixed lens (2.8mm, 6mm optional)
- Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
- DWDR, Day/Night(ICR), 2D-DNR, AWB, AGC, BLC
- Max. IR LEDs length 80m, Built-in Mic, IP67

CP-USC-TA24R8-D

2.4 MP WDR Array Bullet Camera - 80Mtr.



- Features:
- 1/2.9" 2.4MP CMOS Image Sensor
- Max 25/30fps@2.4MP
- WDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (6mm, 8mm optional)
- IR Range of 80Mtrs., IP67
- OSD Menu, control over coaxial cable, 2D-DNR
- HD, SD and Two Analog format Output switchable

5 MP Series

CP-VAC-T24R5-V5

2.4 MP Full HD Array Bullet Camera - 50 Mtr.



- Features:
- 1/2.7" 2.4 MP HD Color Image Sensor
 - Plug-n-Play HD/SD Camera
 - Max 25/30fps@2.4MP
 - 6mm Lens (8mm Optional)
 - Compatible with HDx, AHD, HDCVI, CVBS and HDTVI DVRs
 - DWDR, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
 - Array Range of 50 Mtr. , IP66

CP-USC-DC51PL2-V3

5MP IR Dome Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs.
 - OSD Menu, control over coaxial cable, 2D-DNR
 - CVI/CVBS/AHD/TVI Switchable

CP-USC-DC51PL2C

5MP IR Dome Camera - 20Mtr.



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., Smart IR
 - Support Built-in Mic
 - CVI/CVBS/AHD/TVI switchable

CP-USC-TC51PL2C

5MP IR Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm Fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., IP67
 - Support Built-in Mic
 - CVI/CVBS/AHD/TVI switchable

CP-USC-TC51PL2-V3

5MP IR Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP CMOS Image Sensor
 - Max. 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., IP67
 - OSD Menu, control over coaxial cable, 2D-DNR
 - CVI/CVBS/AHD/TVI Switchable

CP-USC-TC51PL2-V5

5MP IR Bullet Camera - 20Mtr.



- Features:
- 1/2.7" 5MP PS CMOS Image Sensor
 - Max. 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-NR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., IP67

CP-USC-TA50ZL6C-S

5MP IR Bullet Camera



- Features:
- 1/2.7" 5MP Progressive scan CMOS Image Sensor
 - Max 25fps@5MP (16:9 video output)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - 2.7mm~12mm Motorized Lens
 - Support Built-in Mic
 - IR Range of 60Mtrs., Smart IR, IP67
 - CVI/CVBS/AHD/TVI switchable
 - Support Starlight Function

H.265 1SATA Series

CP-UVR-0401/0801/1601E1-IC

4/8/16Ch. 1080N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 5/10/18 channels IP camera inputs, each channel up to 2/6MP; Max 20/40/72Mbps Incoming Bandwidth
 - Support 1 SATA HDD up to 6TB Each, 2 USB Ports
 - 1 HDMI / 1 VGA Simultaneous Video Output
 - Instastream/H.265 dual-stream video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401/0801F1-IC2

4/8 Ch. 5M-N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 6/12 channels IP camera inputs, each channel up to 6MP; Max 32M/64bps Incoming Bandwidth
 - 1 SATA port up to 16TB each, 2 USB Ports, 1 RJ45
 - 1 HDMI / 1 VGA simultaneous video output
 - AI Instastream/Instastream/H.265 dual-stream video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401L1-4KI3

4Ch. 4K-N/5MP Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP signals
 - Support each channel upto 8MP IP Camera
 - Max 64Mbps Incoming Bandwidth
 - 1 SATA port, up to 16TB, 2 USB Ports
 - AI Instastream, Instastream, H.265 dual-stream Video Compression
 - Up to 1 channel video stream (analog channel) human face recognition, Up to 4 channels video stream (analog channel) Perimeter Protection
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-0401E1-CV5

4Ch. 1080N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 5 channels IP camera inputs, each channel up to 2MP; Max 20Mbps Incoming Bandwidth
 - Support 1 SATA HDD up to 8TB, 2 USB Ports
 - 1 HDMI / 1 VGA simultaneous video output
 - Instastream/H.265/H.264+/H.264 video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.264 2SATA Series

CP-UVR-0801E1-CV4

8Ch. 1080N Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 10 channels IP camera inputs, each channel up to 6MP; Max 40Mbps Incoming Bandwidth
 - Support 1 SATA HDD up to 8TB, 2 USB Ports
 - 1 HDMI / 1 VGA simultaneous video output
 - Instastream/H.265/H.264+/H.264 video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1601E2-I

16Ch. 1080P Lite Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 18 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps Incoming Bandwidth
 - Supports Full-channel AI-Coding
 - Support 2 SATA HDD up to 10TB Each, 2 USB Ports
 - 1 HDMI / 1 VGA Simultaneous Video Output
 - Instastream/H.265 video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1601L2-4K

16 Ch. 4K Digital Video Recorder



- Features:
- Support HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - Max 96Mbps Incoming Bandwidth
 - H.264+ /H.264 dual-stream Video Compression
 - HDMI / VGA Simultaneous Video Output
 - Support 2 SATA HDD up to 16TB, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.265 2SATA Series

CP-UVR-1601K2-I3

16Ch. 5M-N/1080P Digital Video Recorder



- Features:
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
 - Instastream/ H.265 dual-stream video compression
 - Up to 2 channels video stream (analog channel) human face recognition, Up to 16 channels video stream (analog channel) SMD Plus
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1601E2-H

16Ch. 1080P Lite H.265 DVR



- ▶ Features:
 - 16Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6MP IP Camera
 - H.265 video compression
 - 2 SATA port up to 10TB Each, 2 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-3201E2-I

32 Ch. 1080N/720P Digital Video Recorder



- ▶ Features:
 - Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 16 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth.
 - Supports 8-channel AI Instastream
 - AI Instastream/ Instastream/ H.265 dual-stream video compression
 - Up to 16 channels video stream (analog channel) SMD Plus
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-3201K2-I3

32 Ch. 5M-N Digital Video Recorder



- ▶ Features:
 - Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 32 channels IP camera inputs, each channel up to 6MP; Max 128Mbps incoming bandwidth
 - AI Instastream/ Instastream/ H.265 dual-stream video compression.
 - Up to 2 channels video stream (analog channel) human face recognition, Up to 16 channels video stream (analog channel) SMD Plus
 - Support 2 SATA HDDs up to 16TB Each, 2 USB Ports
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.265 4K 1SATA Series

CP-UVR-0401/0801/1601L1B-4K13

4/8/16 Ch. 5MP Digital Video Recorder



- ▶ Features:
 - Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 8/16/32 channels IP camera inputs, each channel up to 8MP; Max 64/128 Mbps incoming bandwidth
 - Support 1 SATA HDD up to 16TB each, 2 USB Ports
 - 1 HDMI / 1 VGA simultaneous video output.
 - Instastream/H.265 dual-stream video compression.
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.265 4K 2SATA Series

CP-UVR-0801/1601L2-4KH

8/16 Ch. 4K H.265 DVR



- ▶ Features:
 - 8/16 Ch. Video, 1 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - Instastream/H.265 dual-stream video compression
 - 2 SATA port up to 10TB Each, 2 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

H.265 4/8SATA Series

CP-UVR-0804/1604/3204K4-H

8/16/32 Ch. Digital Video Recorder



- ▶ Features:
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 6/8MP IP Camera
 - Max 48/96/128Mbps Incoming Bandwidth
 - Instastream/ H.265 dual-stream Video Compression
 - HDMI / VGA Simultaneous Video Output
 - Support 4 SATA HDD up to 10TB Each, 3 USB Ports
 - 4/8/16 channels support Tripwire and Intrusion; First 2 channels support Object Abandoned and Missing
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-3216K8-H

32 Ch. 1080P H.265 DVR



- ▶ Features:
 - 32 Ch. Video, 16 Ch. Audio
 - Auto Adaptive HDCVI/AHD/TVI/CVBS/IP signals
 - Support upto 8MP IP Camera
 - Instastream/H.265 dual-stream video compression
 - 8 SATA port up to 10TB Each, 4 USB Ports, 1 RJ45, 1 RS485
 - HDMI / VGA simultaneous video output
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1604K4-I3

16Ch. 5M-N Digital Video Recorder




- ▶ Features:
 - Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 24 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth
 - Support 4 SATA HDD up to 16TB Each, 3 USB Ports
 - 1 HDMI / 1 VGA simultaneous video output.
 - AI Instastream/Instastream/H.265 dual-stream video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UVR-1616K8-I3

16 Ch. 5M-N Digital Video Recorder



- ▶ Features:
 - Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 - Max 24 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth.
 - Support 8 SATA HDDs up to 16TB Each, 4 USB Ports
 - 2 HDMI / 1 VGA / 1 TV simultaneous video output.
 - AI Instastream/ Instastream/ H.265 dual-stream video compression
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

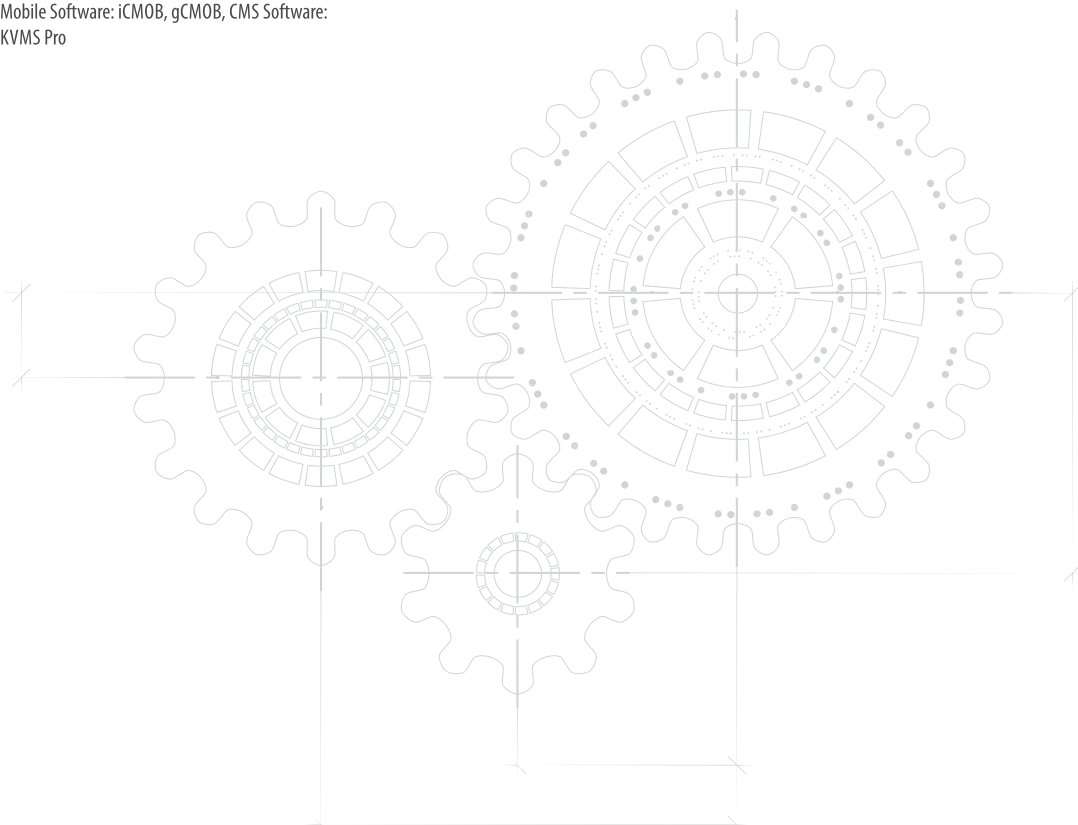

BODY WORN SOLUTION



Body Worn Camera

CP-UBC-2147

Body Worn Camera



- ▶ Features:
 - Android 9.0
 - 2.0" touch screen
 - 8-core 1.8 GHz High-Performance CPU
 - Supports 1080p@30 fps recording, the image resolution up to 34MP
 - H.265/H.264 high compression coding.
 - Support 2G/3G/4G Cellular network, Wi-Fi, Bluetooth, NFC, GPS/GLONALL
 - Power saving mode optional, pre-record and post-record up to 60s.
 - 16GB internal storage and support external SD card
 - One press to record video/audio/alarm/PTT
 - Supports IP68, drop test 2 meters.

CP-EDS-Y08

8 Port Docking Station with Screen



- ▶ Features:
 - 10 inches touch screen with resolution of 1920 x1200.
 - Support 8 channel camera for backup and recharge.
 - Support 1GB Ethernet port for data uploading.
 - Fast data export and battery recharge.
 - Support Android system.
 - Support upload data to the center FTP server

CP-EBC-1073-K

4K Body Worn Camera



- ▶ Features:
 - Support 4K resolution for recording
 - 2.4 inch touch screen supported
 - H.265/H.264 video compression
 - Support built-in 4G for live video transmission
 - Support built-in Wi-Fi for uploading
 - Support built-in GPS for live tracking
 - Support optional G-sensor and Gyro
 - Support front and back two cameras
 - Hot-swappable 3050mAh lithium battery
 - Built-In storage can extend to 256GB
 - Support Network PTT function

CP-DDS-N08

8 Port Docking Station



- ▶ Features:
 - 8 Port docking station for simultaneous video backup and charging
 - There are connection indicator on each port. Each port output current 1.2A
 - Interface- USB 2.0 for charging and backup and power switch power cable for dock station
 - 8pcs water proof mini USB ports
 - Dock station casing is metal and black paint craft with Hanging bracket

CP-DBP-H20

Full HD Body Worn Camera



- ▶ Features:
 - 1080P color Video Recording
 - 1.8m drop test
 - Easy one-touch recording
 - 2" LCD screen with instant playback of video, photos or audio
 - Built-in high-quality microphone and speaker
 - 16GB/32GB/64GB/128GB Internal storage
 - IP65

CP-UDS-N08

Data Collection Station/Data Collection Module



- ▶ Features:
 - Each CP-UDS-N08 contains 8 docks which can connect body camera CP-UBC-2147.
 - Each dock contains a cable with micro USB 2.0 interface.
 - Electronic lock design for each dock which can be unlocked only by authorized user.
 - Mechanical lock at the bottom which can be used to unlock docks.
 - Total bandwidth up to 128MB/s for data collection.
 - Two LED indicators on each dock which used to show the charging status and data collection status.

Data Management Terminal

CP-EDS-N06

6 Port Docking Station



- ▶ Features:
 - Support totally 10 cameras for backup simultaneously.
 - Support to charge totally 10 cameras at the same time.
 - Support to upload all the files to the center server manually or timing.
 - Support to export all the video files from body camera to local PC.
 - Support device password modification
 - Compatible with different models of body worn camera.

CP-UA-M13T-R

Data Collection Station/Control Module



- ▶ Features:
 - Supports separate installation and removal. One control module can be connected to 4 data collection modules (32 MPTs).
 - With 13.3" 1920 × 1080 HD capacitive touch screen, it is easy to operate
 - Unlock the dock by face, fingerprint and password.
 - Built with a micro USB 2.0 interface; supports using retractable USB cable which can be replaced without opening the collection station.
 - With built-in lithium battery, when fully charged, you can unlock all docks at least once after the control module is powered off for 10 consecutive days.
 - Supports up to 6 HDDs of 10TB, and Raid 0/1/5/10.

MOBILE DVR/ NVR SOLUTION



Mobile DVR

CP-UVR-0401F1-PGI

4 Ch. H.265 AI Mobile Video Recorder



- Features:
- Supports 4-ch 2MP analog cameras and 4-ch 2MP IP cameras input
 - Support Instream/H.265 video compression
 - Support Penta-Brid (HDCVI/AHD/TVI/CVBS/IP) video input
 - Support 1 HDD and 1 SD card, 3 USB Ports (2.0)
 - Supports DSM/ADAS/BSD
 - Support GPS and 3G/4G
 - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

CP-UVR-0401F2-PGI

4 Ch. H.265 AI Mobile Video Recorder



- Features:
- Supports 4-ch 2MP analog cameras and 1-ch 2MP IP cameras input
 - Support Instream/H.265 video compression
 - Supports 2 SD cards (up to 256 GB for each), 2 USB Ports(2.0)
 - Supports DSM/ADAS/BSD
 - Support GPS and 3G/4G
 - Mobile Software: EMSS Pro, iCMOB/gCMOB (Live view and Playback)
 - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

Mobile NVR

CP-UNR-404T1/408T2-AI

4/8 Ch. PoE H.265 AI Mobile Network Video Recorder



- Features:
- Supports 4/8 Ch. 2MP PoE IP cameras input
 - Support Instream/H.265 video compression
 - Aviation connectors/ RJ45(Optional)
 - Support 1/2 HDD and 1 SD card, 3 USB Ports (2.0)
 - Supports DSM, face recognition or ANPR
 - Support GPS, Wi-Fi and 3G/4G
 - Mobile Software: EMSS Pro, iCMOB/gCMOB (Live view and Playback)
 - CMS Software: EMSS Pro, KVMS Pro (Live view and Playback)

Mobile Camera

CP-USC-WB24L2C-D

2.4MP Full HD IR Mobile Wedge Camera - 20Mtr.



- Features:
- 1/2.8" 2.4MP CMOS Image Sensor (0.9071 centimeters)
 - Max 30fps@2.4MP
 - WDR(120dB), Day/Night(ICR), 3D/2D-DNR, AWB, AGC, BLC, HLC
 - 3.6mm fixed lens (2.8mm optional)
 - IR Range of 20 Mtrs., Smart IR, IP67, IK10
 - IP6K9K, Shock-proof
 - Audio in interface, Support Built-in Mic
 - HD, SD and Two Analog format Output

CP-USC-CC24L2C

2.4MP Mobile Cube Camera



- Features:
- 1/2.7" 2.4 MP Progressive CMOS Image Sensor(0.9407cm)
 - Max 30fps@2.4MP
 - CVI/CVBS/AHD/TVI switchable
 - 2.8mm fixed lens (2.1mm optional)
 - DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
 - IR Max. length 20m, Smart IR, Built-in Mic
 - Built-in 1/1 alarm in/out
 - IP67, Shock-proof

CP-UNC-WC21L5C-MDS

2MP Full HD WDR IR Network Wedge Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Instream & H.265 triple-stream encoding
 - Max. 25/30fps@2MP
 - 2.8mm fixed lens (3.6mm, 6mm optional)
 - WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
 - IR Range of 50 Mtrs, IP67, IK10, Micro SD Card, PoE
 - Support Built-in Mic
 - Support Starlight Function
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-M3020L15-V2

2 MP Full HD Network Mobile Positioning System



- Features:
- 1/2.8" 2MP CMOS Image Sensor (0.9071cm)
 - Max. 25/30fps@1080P
 - Powerful 30x Optical Zoom
 - DWDR, 2D/3D DNR, AGC, AWB, BLC, HLC
 - 4.5mm ~ 135mm Lens
 - IR Distance up to 150 Mtr., IP66
 - Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UNP-3020R1

2 MP Full HD IP Mobile Portable PTZ Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor (0.9071cm)
 - Pan range: 360° endless, speed up to 90°/s
 - Powerful 30x Optical Zoom
 - Supports Micro SD Card Upto 128 GB
 - 4.5mm ~ 135mm Lens
 - IR Distance up to 100 Mtr., IP66
 - Up to 256 Presets, 8 Tour
 - Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro

CP-UA-DSM1

Driver Monitoring Camera



- Features:
- 1/4" 1MP CMOS image sensor
 - Max. Outputs 50 Hz (1280 × 720)@25fps, Max. Outputs 60 Hz (1280 × 720)@30fps
 - IR Range of 3m
 - 2D/3D NR, BLC, HLC, AGC, IP54
 - 9V-16 VDC

CP-UA-ADAS1

Front-view Monitoring Mobile Camera



- Features:
- 1/2.8" 2MP CMOS Image Sensor
 - Outputs 50 Hz (1920 × 1080)@25 fps. Outputs 60 Hz (1920 × 1080)@30 fps
 - WDR, 3D NR, BLC, HLC, AGC, IP54
 - 9V-16 VDC

PoE SWITCHES



10/100 PoE Switch

CP-DNW-HPU4H2-48-V2

6 Ports Switch with 4 PoE Ports & 2 Uplink Ports



- ▶ Features:
 - Support IEEE802.3/802.3u/802.3x
 - 4, 100Mbps; RJ45 ports, Supports Max. 30W Output of Single PoE Port
 - 2 Uplink Ports, 10/100Mbps; Transmission Distance: Default: 0-100m
 - Switch Capacity: 1.2Gbps (non-blocking)
 - ESD Protection: Air discharge: 8KV, Contact discharge: 6KV
 - Power Budget - 48W

CP-DNW-HPU8H2-96-V2

10 Ports Switch with 8 PoE Ports & 2 Uplink Ports



- ▶ Features:
 - 8, 100Mbps; RJ45 ports, Supports Max. 30W Output of Single PoE Port
 - Support IEEE802.3i/802.3u/802.3x
 - 2, 100Mbps, Transmission Distance: 0-100m
 - Switch Capacity: 2 Gbps
 - PoE Power Budget: 96W

CP-ANW-HPU8G2-N12

8 Ethernet Port + 2 Gigabit Port AI PoE Switch



- ▶ Features:
 - Networking standard: IEEE802.3af/at/bt
 - 5.6 Gbps Bandwidth
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI / MDIX)
 - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
 - PoE Power Budget: 120W

CP-ANW-HP16G2F1-N30

16EP+2G+1SFP AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP and IP camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI / MDIX)
 - FE ports can support 250 meters long distance transmission automatically
 - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
 - The port Max power Output is 60 watts, it is convenient for high-power device
 - Power Budget ≤300W

CP-ANW-HP24G2-N30

24EP+2G AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP/CPE and PTZ/IP camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI / MDIX)
 - 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection, Short circuit protection
 - Max. output power of the port is 60 watts, it is convenient for high-power device
 - Power Budget ≤300W

CP-DNW-HPU24G2F1-30

27 Ports Switch with 24 PoE Ports & 2 Gigabit + 1 SFP Uplink Por



- ▶ Features:
 - Port 1-24 support PoE, Max. 30W Output of Single PoE Port
 - Support IEEE802.3/802.3u/802.3z/802.3ab/802.3x
 - 2, 1000Mbps & 1 Gigabit SFP Uplink port; Transmission Distance: Default: 0-100m
 - Switch Capacity: 10.8 Gbps (non-blocking)
 - PoE Power Budget: 300W

Gigabit PoE

CP-DNW-GPU4G2-48-V3

6 Ports Switch with 4 Gigabit PoE Ports & 2 Gigabit Uplink Ports



- ▶ Features:
 - 4, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port
 - Support IEEE802.3i/802.3u/802.3x/802.3ab
 - Switch Capacity: 12 Gbps Full duplex
 - Uplink Port: 2, 1000Mbps; Transmission Distance: 0-100m
 - All ports support MDI/MDIX
 - PoE Power Budget: 48W

CP-DNW-GPU8G2F2-96

10 Ports Switch with 8 Gigabit PoE Ports & 2 Gigabit Uplink Ports, 2 SFP Ports



- ▶ Features:
 - 8, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port, 2x1000Mbps RJ45 ports 2x1000Mbps SFP Port
 - Supports IEEE802.3i/802.3u/802.3x/802.3af/802.3ab/IEEE 802.3z
 - Transmission Distance: default: 0-100m
 - Easy and safe installation

CP-DNW-GPU8G2-96-V3

10 Ports Switch with 8 Gigabit PoE Ports & 2 Gigabit Uplink Ports



- ▶ Features:
 - 8, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port
 - Support IEEE802.3i/802.3u/802.3x/802.3af/802.3ab
 - Switch Capacity: 20Gbps Full duplex
 - 2, 1000Mbps; Transmission Distance: 0-100m
 - All ports support MDI/MDIX
 - PoE Power Budget: 96W

CP-DNW-GPU8G2-96-V4

10 Ports Switch with 8 Gigabit PoE Ports & 2 Gigabit Uplink Ports



- ▶ Features:
 - 8, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port
 - Support IEEE802.3i/802.3u/802.3x/802.3af/802.3ab
 - Switch Capacity: 20Gbps Full duplex
 - 2, 1000Mbps; Transmission Distance: 0-100m
 - All ports support MDI/MDIX
 - PoE Power Budget: 96W

CP-ANW-GPU8G2F2-N12

8GP + 2G + 2SFP 10/100/1000Mbps AI PoE Switch



- ▶ Features:
 - Networking standard: IEEE802.3af/at/bt.
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI / MDIX)
 - The port power is 60 watts, it is convenient for high-power device
 - Network performance: Store-and-forward.
 - PoE Power Budget : 120W

CP-ANW-GPU16F2-N30

16 Gigabit Port + 2SFP 10/100/1000Mbps AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP and IP camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart.
 - Upload port automatic flip (Auto MDI/MDIX)
 - Network performance: Store-and-forward
 - The port power is 60 watts, it is convenient for high-power device
 - Power Budget 300W

CP-ANW-GPU24F2-N30

24 Gigabit Port + 2 SFP 10/100/1000Mbps AI PoE Switch



- ▶ Features:
 - Using CAT.5 network patch cords support power for the wireless AP and IP Camera
 - Networking standard: IEEE802.3af/at/bt
 - PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
 - Upload port automatic flip (Auto MDI/MDIX)
 - Network performance: Store-and-forward
 - The port power is 60 watts, it is convenient for high-power device
 - Power Budget 300W

CP-DNW-GPU4F2-65

6 Ports Switch with 4 Gigabit PoE Ports & 2 SFP Gigabit Uplink Ports



- ▶ Features:
 - 4, 100/1000Mbps; RJ45 ports, port 1 supports Max. 60W, and other ports supports Max. 30W Output of Single PoE Port
 - Support IEEE802.3/802.3u/802.3x/802.3z/802.3ab
 - Switch Capacity: 12 Gbps (Non Blocking)
 - 2, 1000Mbps, SFP Port, Transmission Distance: 0-100m
 - Easy and safe installation
 - PoE Power Budget: 65W

10/100/1000 Managed PoE Switch

CP-ANW-GPM8F2-N12

8 Port Gigabit + 2 Port Gigabit SFP Layer 2 Managed PoE Switch



- ▶ Features:
 - Supports IEEE 802.3i IEEE 802.3u IEEE802.3ab IEEE802.3z IEEE802.3x IEEE802.3at IEEE802.3af IEEE802.3az
 - 8 x Gigabit PoE+ Ports and 2 x Gigabit SFP
 - Supports MAC address auto learning and auto aging
 - Supports PoE power up to 30W for each PoE port, all power up to 120W
 - Support QoS, port mirroring, link aggregation protocol

CP-ANW-GPM16F2-N30

16 Port Gigabit + 2 Port Gigabit SFP L2 Managed PoE Switch



- ▶ Features:
 - Supports IEEE 802.3i IEEE 802.3u IEEE802.3ab IEEE802.3z IEEE802.3x IEEE802.3at IEEE802.3af IEEE802.3az
 - Supports PoE power up to 30W for each PoE port, all power up to 120W
 - 16 x gigabit PoE+ ports and 2 x gigabit SFP
 - Supports MAC address auto learning and auto aging
 - PoE Power Budget: 300W

CP-DNW-GPM24F4-40-L3

24 Port Gigabit + 4 SFP+ Uplink Ports L3 Managed PoE Switch



- ▶ Features:
 - Supports IEEE 802.1d, IEEE 802.1w, IEEE 802.1s, IEEE 802.1p, IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z, IEEE 802.3ab, IEEE 802.3ae standard
 - Compatible with IEEE802.3at (30W) and IEEE802.3af (15.4w) power supply standard
 - L3 Management, support DHCP Server, QoS, ACL control, support SNMP V1/V2/V3, support IGMP Snooping v1/v2
 - MTBF 100000 hours
 - Power Budget: 440W

CP-ANW-GPM24G4F4-N40

24 Port Gigabit + 4 Port Gigabit SFP Layer 2 Managed PoE Switch



- ▶ Features:
 - Supports IEEE 802.3i, IEEE 802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3x, IEEE802.3at, IEEE802.3af, IEEE802.3az
 - 24 x Gigabit PoE+ Ports and 4 x Gigabit Combo
 - Supports MAC address auto learning and auto aging
 - Supports PoE power up to 30W for each PoE Port, all power up to 400W
 - Store and forward mode operates.
 - Power Budget 400W

Gigabit Desktop Network Switch

CP-ANW-GS105-M

5 Port 10/100/1000Mbps Gigabit Switch



- ▶ Features:
 - Transmission Distance up to 100Meters, speed up to 1,000 Mbps
 - 10/100/1000Mbps Auto-Negotiation 5 RJ45 ports, Add up to five devices to a local network
 - Supporting Auto-MDI/MDIX
 - Supports MAC address auto-learning and auto-aging
 - Low Power Consumption

CP-ANW-GS108-M

8 Port 10/100/1000Mbps Gigabit Ethernet Switch



- ▶ Features:
 - Transmission Distance up to 100Meters, speed up to 1,000 Mbps
 - 10/100/1000Mbps Auto-Negotiation 8 RJ45 ports, Add up to eight devices to a local network
 - Supporting Auto-MDI/MDIX
 - Supports MAC address auto-learning and auto-aging
 - Low Power Consumption

Outdoor PoE Switch

CP-ANW-HPU8H2D-N12

8 Port PoE + 2 Uplink Port Outdoor PoE Switch



- ▶ Features:
 - Networking standard: IEEE 802.3i 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3x Flow Control, IEEE 802.3af/at/bt Power over Ethernet
 - Transmission Distance: 1~2 ports 250m 10Mbps / 3~8 ports 130m 100Mbps
 - Bandwidth: 2.0 Gbps
 - Support 6KV lightning protection, 8KV surge protection
 - Support bt 60W High Power (PoE Port 7~8)
 - PoE Power Budget : 120W

CP-ANW-GPU8G2F2D-N12

8Gigabit PoE Port + 2Gigabit Uplink Port + 2SFP Port Outdoor PoE Switch



- ▶ Features:
 - Networking standard: IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3x Flow Control, IEEE 802.3af/at/bt Power
 - Transmission Distance: 130m
 - Bandwidth: 24Gbps
 - Support 6KV lightning protection, 8KV surge protection
 - Support bt 60W High Power (PoE Port 7~8)
 - PoE Power Budget : 120W

CP-ANW-HPU16G2F1D-N30

16 Port PoE + 2 Uplink Port + 1 SFP Port Outdoor PoE Switch



- ▶ Features:
 - Networking standard: IEEE 802.3i 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3x Flow Control, IEEE 802.3af/at/bt Power over Ethernet
 - Transmission Distance 100Mbps /10Mbps, Auto-Adaption 250m
 - Bandwidth: 12.8Gbps
 - Support 6KV lightning protection, 8KV surge protection
 - Support bt 60W High Power (PoE Port 15~16)
 - PoE Power Budget : 300W

TIME & ATTENDANCE



Time & Attendance

CP-RTA-M5022

Face Recognition & Access Control Time Attendance



- ▶ Features:
 - 4inch HD Touch Screen
 - 2MP Color Camera + 2MP Infarred Camera
 - Face Capacity: 5000, Card Capacity: 5000, Password Capacity: 5000
 - Recognition Distance: 0.5~2.5Mtr
 - 500000 Log Capacity
 - Support WDR

CP-RTA-M5032

Face Recognition & Access Control Time Attendance



- ▶ Features:
 - 2.8inch color Screen
 - 2MP Color Camera + 2MP Infarred Camera
 - Face Capacity: 5000, Card Capacity: 5000, Password Capacity: 5000
 - Recognition Distance: 0.5~2.5Mtr
 - 500000 Log Capacity
 - Support WDR

CP-RTA-M3022

Face Recognition Time Attendance Terminal



- ▶ Features:
 - 2.8inch TFT color LCD Display
 - Facial, Fingerprint, PIN, Card
 - Face Capacity: 1000, Fingerprint Capacity: 3000, Card Capacity: 3000, Password Capacity: 3000
 - 300000 Log Capacity
 - Support USB Flash Drive, TCP/IP

CP-RTA-M1043

Fingerprint Time Attendance



- ▶ Features:
 - 2.8inch Color LCD Display
 - Fingerprint, Card and Password User
 - Fingerprint Capacity: 1000, Card Capacity: 1000, Password Capacity: 1000
 - Battery Backup: Built-in (2-3 Hours)
 - Support Sound Indicator

CP-RTA-M10043

Fingerprint Time Attendance



- ▶ Features:
 - 2.8inch Color LCD Display
 - Fingerprint, Card and Password User
 - Fingerprint Capacity: 1000/3000/5000, Card Capacity: 1000/3000/5000/10,000, Password Capacity: 1000/3000/5000
 - Built-in Access Control
 - Support Sound Indicator
 - Optical Fingerprint Sensor
 - RS485, USB Drive/Link, TCP/IP, Wi-Fi, GPRS Communication Mode

CP-RTA-M1003

Fingerprint Time Attendance



- ▶ Features:
 - 2.8inch Color LCD Display
 - Fingerprint, Card and Password User
 - Fingerprint Capacity: 1000/3000/5000, Card Capacity: 1000/3000/5000/10,000, Password Capacity: 1000/3000/5000
 - Built-in Access Control
 - Support Sound Indicator
 - Optical Fingerprint Sensor
 - RS485, USB Drive/Link, TCP/IP Communication Mode

CP-RTA-M1042

Fingerprint Time Attendance



- ▶ Features:
 - 2.4inch Color LCD Display
 - Fingerprint, Card and Password User
 - Fingerprint Capacity: 1000, Card Capacity: 1000, Password Capacity: 1000
 - Battery Backup: Built-in (2-3 Hours)
 - Support Sound Indicator
 - Optical Fingerprint Sensor
 - RS485, USB Drive/Link, TCP/IP Communication Mode

CP-RTA-M1022

Fingerprint Time Attendance



- ▶ Features:
 - 2.4inch Color LCD Display
 - Fingerprint, Card and Password User
 - Fingerprint Capacity: 1000, Card Capacity: 1000, Password Capacity: 1000
 - Support USB Interface
 - Optical Fingerprint Sensor

CP-VTA-F1043

Face & Fingerprint Based Time Attendance Terminal



- Features:
- 2.8" HVGA Display
 - Support 1000 Face Recognition
 - Support 10000 Fingerprints
 - Support 200000 Storage Capacity
 - Support USB 2.0

CP-VTA-T2324-U

Fingerprint Time Attendance



- Features:
- LCD: 4" 480 x 320 Color Display
 - Hardware Platform: WS306
 - Fingerprint capturing: Optical Sensor
 - Failed Recognition Rate: $\leq 0.0001\%$
 - False Acceptance Rate: $\leq 0.01\%$
 - Management Record Capacity: 1000, Storage Capacity: 100000
 - Fingerprint capacity: 500

CP-VTA-M1143

Face & Fingerprint Based Time Attendance Terminal



- Features:
- 2.8" HVGA Display
 - Support 1000 Face Recognition
 - Support 10000 Fingerprints
 - Support 200000 Storage Capacity
 - Support USB 2.0

PROVIDING
DEPENDABLE
SECURITY FOR
EVERYONE

Reliability, Performance & Aesthetics



ACCESSORIES



Power Supply

CP-DPS-MD50P-12D

Metal Case Power Supply (Premium Series)



- ▶ Features:
 - Wide range of Input voltage 190V~250V AC
 - Add more cameras with higher power budget 12V, 5A
 - Built-in EMI filter to nullify interference
 - Voltage regulator switch for voltage adjustment
 - Protections: Overload / Over Voltage / Short Circuit
 - Metal Housing for uniform/quick heat dissipation

CP-DPS-MD100P-12D

Metal Case Power Supply (Premium Series)



- ▶ Features:
 - Wide range of Input voltage 190V~250V AC
 - Add more cameras with higher power budget 12V, 10A
 - Built-in EMI filter to nullify interference
 - Voltage regulator switch for voltage adjustment
 - Protections: Overload / Over Voltage / Short Circuit
 - Metal Housing for uniform/quick heat dissipation

CP-DPS-MD200P-12D

Metal Case Power Supply (Premium Series)



- ▶ Features:
 - Wide range of Input voltage 190V~250V AC
 - Add more cameras with higher power budget 12V, 20A
 - Built-in EMI filter to nullify interference
 - Voltage regulator switch for voltage adjustment
 - Protections: Overload / Over Voltage / Short Circuit
 - Metal Housing for uniform/quick heat dissipation

CP-DPS-PD04V2-12D

4 Channel Power Supply



- ▶ Features:
 - 4 Channel Output
 - With Cable Compensation Switch
 - LED Indicator for Each Channel
 - Built-in EMI Filter to Nullify Interference
 - Cooling by Free Air Convection
 - Built-in Constant Current Limiting Circuit
 - 100% Full Load Built-in test
 - Plastic Housing

CP-DPS-PD08V2-12D

8 Channel Power Supply



- ▶ Features:
 - 8 Channel Output
 - With Cable Compensation Switch
 - LED Indicator for Each Channel
 - Built-in EMI Filter to Nullify Interference
 - Cooling by Free Air Convection
 - Built-in Constant Current Limiting Circuit
 - 100% full Load Built-in test
 - Plastic Housing

CP-DPS-PD16V2-12D

16 Channel Power Supply



- ▶ Features:
 - 16 Channel Output
 - With Cable Compensation Switch
 - LED Indicator for Each Channel
 - Built-in EMI Filter to Nullify Interference
 - Cooling by Free Air Convection
 - Built-in Constant Current Limiting Circuit
 - 100% full Load Built-in test
 - Plastic Housing

CP-LPS-PD04-12D

4 Ch. Power Supply



- ▶ Features:
 - EMC/EMI Standards
 - ABS , fire protection
 - Over Current/Voltage Protection; Short Circuit Protection; Over load protection
 - LED indicator for power on

CP-LPS-PD08-12D

8 Ch. Power Supply



- ▶ Features:
 - EMC/EMI Standards
 - ABS , Fire protection
 - Over Current/Voltage Protection; Short Circuit Protection; Over load protection
 - LED indicator for power on

CP-CPS-PD04-12D

4 Ch. Power Supply



- Features:
- Universal AC Input/ Full Range
 - LED Indicator For Power on For Each Channel
 - Long Distance Voltage Drop Adjustment with Cable Compensation Switch
 - Low Ripple Voltage, Low Energy Consumption with High Efficiency
 - Stabilize Output with Low Interference

CP-CPS-PD08-12D

8 Ch. Power Supply



- Features:
- Universal AC Input/ Full Range
 - LED Indicator For Power on For Output
 - Long Distance Voltage Drop Adjustment with Cable Compensation Switch
 - Low Ripple Voltage, Low Energy Consumption with High Efficiency
 - Stabilize Output with Low Interference

Electric RIM Lock

CP-TA-ER2A-NC

Electric Rim Lock



- Features:
- 5Pcs of Iron Computer Keys.
 - Double Brass Cylinders
 - Brass Latch
 - Satin Nickel Finish
 - Adjusted Backset

IR Illuminators

CP-SA-L690-V

IR Illuminator - 60 Meter



- Features:
- Super power dot-matrix IR LED with strong light effect
 - High efficient twice optical lens processing achieves 90% of the luminous efficiency
 - The Housing adopts high thermal conductivity aluminum to enhance heat dispersion property
 - Stainless steel bracket and screw ensure low maintenance

CP-SA-L5601-EW

IR Illuminator - 50 Meter



- Features:
- Super power dot-matrix IR LED with strong light effect
 - High efficient twice optical lens processing achieves 90% of the luminous efficiency
 - The Housing adopts high thermal conductivity aluminum to enhance heat dispersion property
 - Stainless steel bracket and screw ensure low maintenance

CP-SA-L8451-EW

IR Illuminator - 80 Meter



- Features:
- To improve performance of the weak light camera, thereby enhancing the picture effects at night
 - Conventional night monitoring
 - Reduce signal noise and other image distortion
 - Reduce the network bandwidth requirements

CP-SA-L45160-B

IR Illuminator - 160-100 Meter



- Features:
- The function of video analysis at night
 - Conventional night monitoring
 - Reduce signal noise and other image distortion
 - To improve performance of the weak light camera and enhancing the picture effects at night

CP-SA-L15120-EW

IR Illuminator - 120 Meter



- Features:
- To improve performance of the weak light camera, thereby enhancing the picture effects at night
 - Conventional night monitoring
 - Reduce signal noise and other image distortion
 - Reduce the network bandwidth requirements

CP-SA-L630-EW

IR Illuminator - 60 Meter



- Features:
- Super power dot-matrix IR LED with strong light effect
 - High efficient twice optical lens processing achieves 90% of the luminous efficiency
 - The Housing adopts high thermal conductivity aluminum to enhance heat dispersion property
 - Stainless steel bracket and screw ensure low maintenance

CP-SA-L630-E

IR Illuminator - 60 Meter



- Features:
- Super power dot-matrix IR LED with strong light effect
 - High efficient twice optical lens processing achieves 90% of the luminous efficiency
 - The Housing adopts high thermal conductivity aluminum to enhance heat dispersion property
 - Stainless steel bracket and screw ensure low maintenance

Housing

CP-UA-H14L50B-V

IR Camera Housing



- Features:
- Aluminum Casing, IP67, IK10 Housing
 - IR Range of 50Mtr
 - waterproof Coating Film
 - Easy Installation

CP-UA-H14BV

14" Vandal Proof Camera Housing



- Features:
- IP66, IK10 Housing
 - Heater Blower
 - Waterproof Coating Film
 - Neat & Integrated design

CP-UA-H14L100B-VP

14" Vandal Proof IR PoE Housing



- Features:
- 14" IR PoE Housing
 - IP67, IK10, Vandalproof
 - Waterproof Coating Film
 - Neat & Integrated design

CP-UA-H14L100BW

14" Full-function Housing



- Features:
- IP66, Housing
 - Waterproof Coating Film
 - Neat & Integrated design

Bracket

CP-UA-B14

Housing Wall Mount Bracket



CP-UA-B12

Wall Mount Bracket



CP-VA-B11W

Wall Mount Bracket



CP-UA-P3

Pole Mount Bracket



CP-UA-B2P

Pole Mount Bracket



CP-UA-B21C

In-ceiling Mount Bracket



Lens

CP-UML-AD550

4MP CS Mount Lens



CP-UML-AD2712

4MP CS Mount Lens



CP-UML-4K-AL1042

12MP 4K CS Mount Lens



CP-UML-AL1575

12MP C mount Lens



Cable

CP-ECC-70/90/180RS

3+1 CCTV Cable (Standard Cable)



► Features:

- Solid Annealed Bare Copper Conductor
- LLDPE Insulation Material
- 70/90/180 Mtr. Standard Cable Length
- For Video, Power and Audio Communication
- Shielded Communication cable
- Excellent signaling characteristics

CP-ECC-70R

3+1 CCTV Cable (Eco Cable)



► Features:

- Solid Annealed Bare Copper Conductor
- High performance 3+1 Cable
- LLDPE Insulation Material
- 70 Mtr. Standard Cable Length

CP-ECC-90RM

3+1 CCTV Cable (Premium Cable)



► Features:

- Solid Annealed Bare Copper Conductor
- Heavily Braided with HDPE Insulation
- 90 Mtr. Standard Cable Length

CP-ECC-90RP

3+1 CCTV Cable (Premium Pro Cable)



► Features:

- High performance 3+1 cable
- Compatible for Analog security products
- For Video, Power & Coaxial Audio Communication
- Higher gauge copper core & Higher quality copper braiding
- 90 Mtr. Standard Cable Length

CP-ECC-91RS

2+1 CCTV Cable (Standard Cable)



► Features:

- Solid Annealed Bare Copper Conductor
- LLDPE Insulation Material
- 90 Mtr. Standard Cable Length
- For Video & Power Communication (Audio via Coaxial Protocol)

CP-EST-6TGA-305

CAT6 Armoured Cable



► Features:

- Generally conforming to EIA/TIA 568-C.2 and IEC/ISO11801
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 23 AWG cable
- For Outdoor installation

CP-EST-6TGA-305V1

CAT6 UTP Armoured Lan Cable



► Features:

- Solid Bare Electrolytic Grade Copper
- Conductor Diameter 24 AWG (0.50 +/- 0.015MM)
- Polyethylene (HDPE) type Insulation
- AL ARMoured (0.60MM)
- Outer Sheath material PVC





CP-EUT-6TGL-305

Cat6, 4Pair 23AWG UTP Cable (Tangle Free)



► Features:

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA- 568-C.2 Class E Standards backward compatible to Cat5e Applications
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 23 AWG cable
- Optionally Available in Low Smoke Zero Halogen and PE jacket and Armoured


CP-EUT-6TGL23-305 Cat6 24AWG UTP LAN Cable	CP-EST-6TGR-305 Cat6 SFTP Cable	CP-FUT-6TSRH-305 Cat6, 4 Pair UTP Cable (Eco Series)	Cat6 Patch Cord CP-EUT-6TP1/P2 Cat6 Patch Cord
 <p>► Features:</p> <ul style="list-style-type: none"> • Solid Bare Electrolytic Grade Copper • Insulation Polyethylene (HDPE) • 4 Pair Separator Design • 24 AWG cable 	 <p>► Features:</p> <ul style="list-style-type: none"> • Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA- 568-C.2 Class E Standards backward compatible to Cat5e Applications • Can be used for Outdoor Installation • 4 Pair Separator Design • Dual shielding of foil and overall braid • 23 AWG cable 	 <p>► Features:</p> <ul style="list-style-type: none"> • Insulation Material HDPE • Nom. Thickness 0.21mm • 24 AWG Cable 	 <p>► Features:</p> <ul style="list-style-type: none"> • UTP cable • Stranded 24 AWG (1/2 meter length)

ECO SERIES Cat6 Cable (24 AWG)

Your Intelligent Choice For Every Surveillance Need



CABLES
by CP PLUS

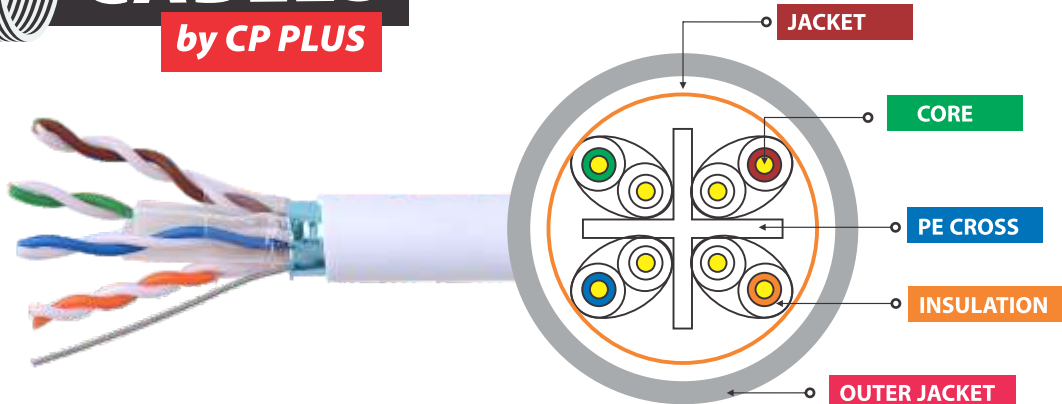

KEY FEATURES

Insulation Material HDPE | Jacket Nom. O.D. 6.0mm | 24 AWG Cable
4 Pair CCA Cable | 305 Mtr. Length | Fresh PVC | 24 AWG

Picture used is for reference only*

NETWORK RACK

(DVR/NVR/SWITCHES)



DVR/NVR/Switches Rack

CP-HA-RK5545-6LP

6U DVR/ NVR Network Rack (Premium Series)



- ▶ Features:
- Wall Mount Rack 6U.
- Basic frame: CRCA (MS SHEET).
- Construction: Welded.
- Cable Entry/Exit provision at Top & Bottom with Rubber at Edges.
- Front Door: Toughened Glass with Lock & Key.
- Toughened Glass used as an excellent thief deterrent.
- 19" Vertical Mounting RAIL with Clear "U" Marking.
- Powder coated Color RAL- 7035.
- Conforms to DIN41494 or equivalent ISO Standards.
- Standard Accessories Available.
- Others Additional Accessories Optional.
- Load Bearing Capacity - 30Kg.
- Differentiator Quality.
- Industry leading design.

CP-PA-RK5563-9U

9U Rack (With Fan, Cable Manager & PDU)



- ▶ Features:
- DVR walls Mount is specially designed to safeguard our DCRs/NVRs/Switches from Theft
- Wall Mount Rack 9U 630mm deep 19".
- 1.6MM Vertical Mounting Rail with clear 'U' Marking
- 0.8MM CRCA Sheet
- Cooling Fan options (min 2).
- Cable entry/exit provision at top and bottom with rubber at edges
- Front with Toughened Glass Door & Lock (5 MM)
- Adjustable 19" equipment mounting verticals provided, with depth adjustable slots

CP-HA-RK5550-12L

12U Rack (Premium Series)



- ▶ Features:
- Wall Mount Rack 12U.
- 19" Vertical Mounting Rail with clear 'U' Marking.
- Basic Frame CRCA MS Sheet.
- Cooling Fan Options (Min 2).
- Cable entry/exit provision at top and bottom with rubber at edges.
- Front with Toughened Glass Door with Lock & Key.
- Powder coated Color- RAL- 7035.
- Wall Mounting Kit.
- Standard Accessories Available.
- Other Additional Accessories Optional.
- Load Bearing Capacity 40Kg.
- Conforms to DIN41494 or equivalent ISO Standards.
- For Small Networking, Telecom, Audio Video, CCTV applications.

CP-HA-RK5550-15L

15U Rack (Premium Series)



- ▶ Features:
- Wall Mount Rack 15U 630mm deep 19".
- 1.6mm Vertical Mounting Rail with clear 'U' Marking.
- 0.8mm CRCA Sheet.
- Cooling Fan options (min 2).
- Cable entry/exit provision (minimum 2) at top and bottom with rubber at edges.
- Front with Toughened Glass Door & Lock (5mm).
- Powder coated Color- RAL- 7035.
- Wall Mounting Kit.
- Conforms to DIN41494 or equivalent ISO 9001:2015 and 14001:2015 Standards.
- Load Bearing Capacity - 40Kg.
- For Small Networking, Telecom, Audio video, CCTV applications.
- 1 PDU, 6 Socket, 1 Cooling Fan, 1 Cantilever Tray, 1 Cable Manager, Hardware Kit

Value Series

CP-HA-RK6010-24U

24U Rack



- ▶ Features:
 - Wall Mount Rack 24U 600mm width with glass door, lock & key.
 - 1.6mm Vertical Mounting Rail with clear 'U' Marking.
 - 1.2mm CRCA Sheet.
 - Cooling Fan options (min 2).
 - Cable entry/exit provision (minimum 2) at top and bottom with rubber at edges.
 - Front with Toughened Glass Door & Lock (5mm).
 - Powder coated Color- RAL- 7035.
 - Wall Mounting Kit.
 - Conforms to DIN41494 or equivalent ISO 9001:2015 and 14001:2015 Standards.
 - Load Bearing Capacity - 40Kg.
 - For Small Networking, Telecom, Audio video, CCTV applications.

CP-HA-RK6010-42U

42U Network Rack (Premium Series)



- ▶ Features:
 - Floor Standing Rack 42U 1000mm deep, 600mm width.
 - Main Frame Pillar with 125mm width & removable side panels.
 - Basic frame: CRCA (MS) Sheet.
 - L-Shape adjustable Vertical Mounting Rail 2mm with 'U' Marking.
 - Castor wheels 6 inch with front brake.
 - Two line cable entry/exit provision (minimum 5) at top/ bottom with rubber.
 - Front with Toughened Glass Door & Lock (5mm).
 - Rear MS vented or perforated door.
 - Cooling Fan options (min 2/4).
 - 1U Horizontal Cable Manager – 2 Nos.
 - PDU (5 Socket Round 5/15Amp 230V AC) - 2 Nos.
 - Cooling Fan (230V AC, 90 CFM) - 4 Nos.
 - Conforms to DIN41494 or equivalent ISO Standards.

CP-HA-RK3535VM-2U

2U DVR/ NVR Rack- Modular (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.5mm thick.
 - Modular Series: Foldable type, easy to build
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable with Lock & Key.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Industry leading design.

CP-HA-RK4535VM-2U

2U Network Rack - Modular (value)



- ▶ Features:
 - Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber glass
 - Powder Coated
 - Silver colour Screws with washers for more toughened fitting
 - Dimension : 450mmx350mmx140mm

CP-HA-RK4535VW-2U

2U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction- Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable with Lock & Key.
 - PDU 3 Sockets (5amp), Included.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Load Bearing Capacity - 10kg.
 - Industry leading design.

CP-HA-RK5535VM-4U

4U Network Rack - Modular (value)



- ▶ Features:
 - Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber non-breakable glass
 - Powder Coated
 - Silver colour Screws with washers for more toughened fitting
 - Dimension : 550x350x240mm

CP-HA-RK4535VM-4U

4U Network Rack - Modular (value)



- ▶ Features:
 - Modular Type (easy to carry & install)
 - CRCA (MS Sheet) 0.6mm thickened
 - Lockable with Acrylic fiber non-breakable glass
 - Powder Coated
 - Silver colour Screws with washers for more toughened fitting
 - Width 450mm x Depth 350mm

CP-HA-RK5035VW-3U

3U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction - Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable with Lock & Key.
 - 3 Socket PDU (5amp), Included.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Industry leading design.
 - Load Bearing Capacity - 15kg

CP-HA-RK5535VW-4U

4U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction- Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable- Toughened glass with Lock & Key.
 - Toughened Glass used as an excellent thief deterrent.
 - PDU 3 Sockets (5amp), 1U cantilever tray, 1 Fan Included.
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Load Bearing Capacity - 15kg.
 - Industry leading design.

CP-HA-RK5540VW-4UN

Wall Mount 4U Rack



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Fixed Structure with 0.6mm CRCA Sheet
 - Construction - Welded
 - Vertical Mounting Rail of 1mm with U Marking
 - Front Door with 5mm Toughened Glass with key lock
 - 2nos Cooling Fans provision on Top
 - Holes on Top & Bottom for Cable Entry/Exit with rubber protection
 - Standard Finish: Powder Coated (RAL 7035)
 - Width 550mm & Depth 400mm

CP-HA-RK5535VW-4UN1P

4U DVR/ NVR Rack (Value Series)



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our DVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.6mm thick.
 - Construction- Welded
 - Top & Bottom cover: cable entry cut-outs.
 - Front Door: Lockable- Toughened glass with Lock & Key.
 - Toughened Glass used as an excellent thief deterrent.
 - PDU 3 Sockets (5amp).
 - Standard finish: Powder coated.
 - Dual-Tone Gray Color - fits in well with all indoor / outdoor aesthetics.
 - Differentiator Quality.
 - Load Bearing Capacity - 15kg.
 - Industry leading design.

CP-MA-RK5540-4L1

4U DVR/NVR Rack



- ▶ Features:
 - DVR walls Mount is specially designed to safeguard our NVRs/DVRs from Theft
 - Basic frame: CRCA (MS SHEET)
 - Construction: Welded
 - Cable Entry/Exit provision at Top & Bottom with Rubber at Edges
 - Front Door: Toughened Glass with Lock & Key
 - 19" Vertical Mounting RAIL with Clear "U" Marking
 - Powder coated Color RAL- 7035
 - Dimension: 550mm x 400mm x 240mm

Outdoor Racks

CP-HA-RK4535-2UO

2U DVR/NVR Outdoor Rack



- Features:
 - DVR/NVR walls Mount is specially designed to safeguard our DVRs/NVRs from Theft.
 - Basic frame: CRCA (MS SHEET) 0.8mm thickness
 - Construction—Welded.
 - Front plain door with key lock and gasket
 - Cooling fans provision on Left and Right side
 - Bottom with 2nos. Cable Entry/Exit cut-outs with rubber protection.
 - Wall/Pole mount with brackets
 - IP55 Rated (Dust proof, Rust proof & Rain water protected)
 - Standard Finish: Power Coated RAL 7035 PP (Light Grey)

CP-HA-RK5035-4UO

4U DVR/NVR Outdoor Rack



- Features:
 - DVR/NVR walls Mount is specially designed to safeguard our DVRs/NVRs from Theft
 - Basic frame: CRCA (MS SHEET) 0.8mm thickness
 - Construction—Welded.
 - Front plain door with key lock and gasket
 - Cooling fans provision on Left and Right side
 - Bottom with 2nos. Cable Entry/Exit cut-outs with rubber protection
 - Wall/Pole mount with brackets
 - IP55 Rated (Dust proof, Rust proof & Rain water protected)
 - Standard Finish: Power Coated RAL 7035 PP (Light Grey)

CP-HA-RK5545-6UO

6U DVR/NVR Outdoor Rack



- Features:
 - Wall Mount Rack 6U
 - Basic frame: 0.8mm CRCA (MS SHEET) thickness
 - Construction—Welded.
 - Front plain door with key lock and gasket
 - Cooling fans provision on Left and Right side with rubber protection
 - Bottom with 2nos. Cable Entry/Exit cut-outs with rubber protection
 - Wall/Pole mount with brackets
 - IP55 Rated (Dust proof, Rust proof & Rain water protected)
 - Standard Finish: Power Coated RAL 7035 PP (Light Grey)

CP-HA-RK5545-9UO

9U DVR/NVR Outdoor Rack



- Features:
 - Wall Mount Rack 9U
 - Basic frame: CRCA (MS SHEET) 0.8mm thickness
 - Construction—Welded.
 - Front plain door with key lock and gasket
 - Cooling fans provision on Left and Right side with rubber protection
 - Bottom with 2nos. Cable Entry/Exit cut-outs with rubber protection
 - Wall/Pole mount with brackets
 - IP55 Rated (Dust proof, Rust proof & Rain water protected)
 - Standard Finish: Power Coated RAL 7035 PP (Light Grey)

Accessories for Racks

CP-HA-F23

Cooling Fan



- Features:
 - Cooling Fan Plastic Body
 - Robust Rugged, well fit in all Standard Racks
 - Good Cooling effect, for the connected Devices
 - 90 CFM
 - 220-230V AC

CP-HA-CT5533

MS CRCA Sheet



- Features:
 - MS CRCA Sheet with 0.8mm thickness
 - 19" Standard(48.26Cm)
 - Cantilever Tray 1U Size
 - Width 550mm x 350mm Depth

CP-HA-CT5522

MS CRCA Sheet



- Features:
 - MS CRCA Sheet with 0.8mm thickness
 - 19" Standard(48.26Cm)
 - Cantilever Tray 1U Size
 - Width 550 mm x 220mm Depth

CP-HA-EC5A-3

Power Distribution Units




- Features:
 - Power Distribution Units with Plastic Body
 - 3 Round Pin Indian Sockets
 - Robust rugged, can be screwed well into all Standard Racks
 - 5Amp

CP-HA-EC5A-6

Power Distribution Units



- Features:
 - Power Distribution Units with Plastic Body
 - 6 Round Pin Indian Sockets
 - Robust rugged, can be screwed well into all standard Racks
 - 5Amp
 - 19" Standard(48.26Cm)
 - Fuse & On/Off Switch with LED Light

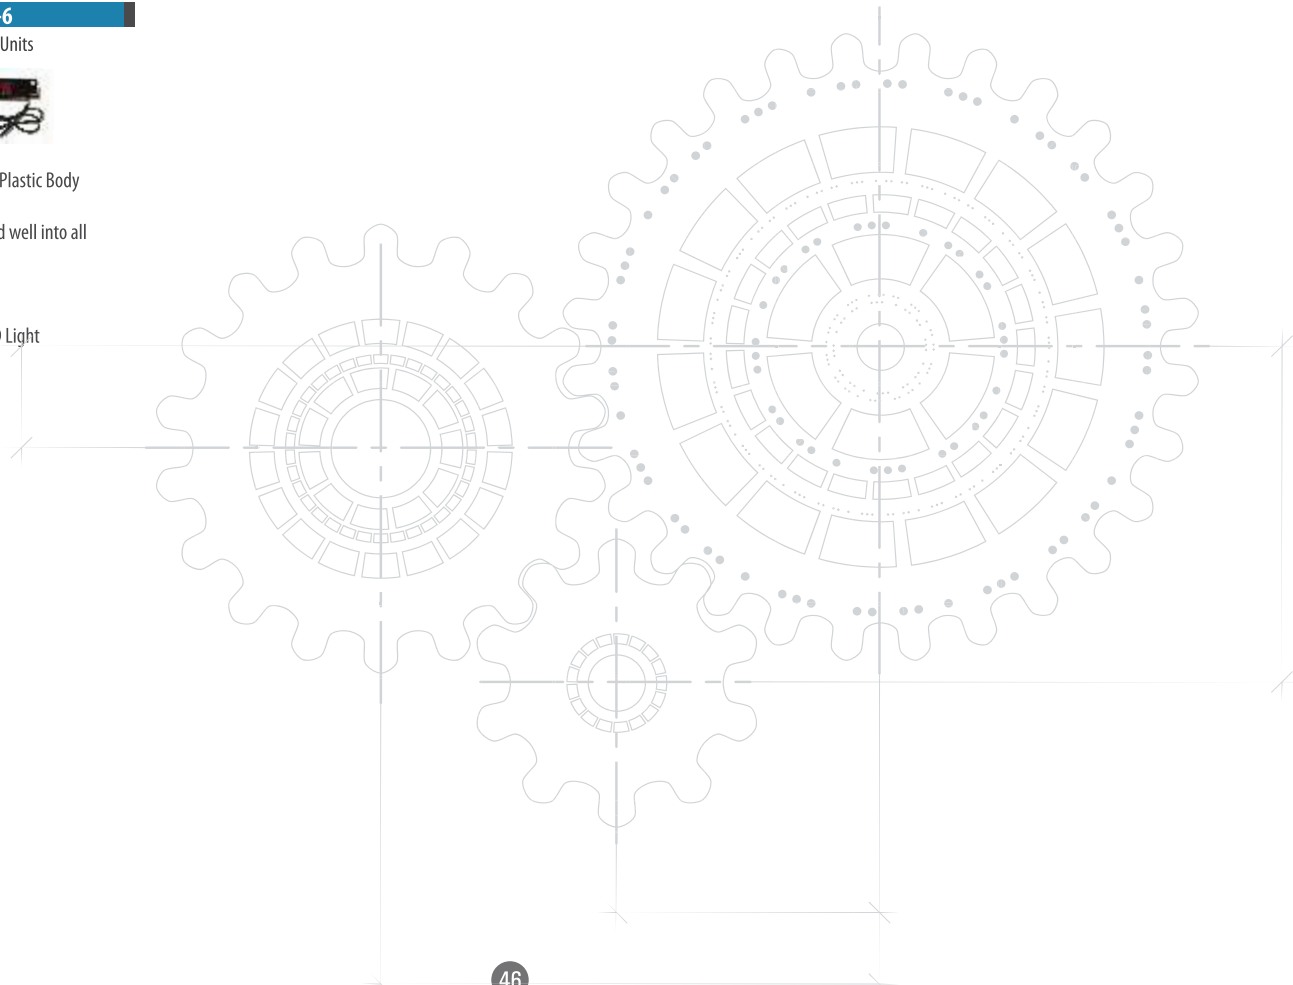



INDUSTRY SECURITY SOLUTION

**ANPR Solution
Entrance & Exit**



**Body Worn
Patrolling Team**



**Smart Analytics
Production Line**



**Fisheye 360°
Warehouse**



**Thermal &
Explosion Proof
Hazardous Area**



**PTZ, Long Range
Smart Tracking
Perimeter**



**4K Resolution Camera
Parking Area**



Manufacturing facilities and warehouses are stocked up with raw materials, WIP or finished goods at all times and therefore require round the clock monitoring and protection. CP PLUS offers solutions designed especially for industrial setups that cater to all their security needs.

Powered by
**ARTIFICIAL
INTELLIGENCE**



- Industry-grade Design Solution...**
- Explosion-proof
 - Anti-corrosion
 - IP68
 - Surge protection



- Vandalism Detection /Prevention Solution...**
- Intelligent video analysis
 - ANPR Solution
 - Access control
 - FR solution



- Alarm integration Solution...**
- Temperature measurement
 - Fire Detection
 - Beam Sensor



- Detection of Equipment Failure Solution...**
- Thermal cameras
 - Leakage in chemical containers
 - Oil & Gas leakage
 - Energy audits
 - Electrical drops, panels, breakers, switches and wire connections



- Integrated Software Platform Solution...**
- Integration platform for different solution
 - Server client architecture
 - N+M fail over
 - Evidence management
 - Audit trail live

