


CP- UVC-VC4K08ZL5H-VD**4K WDR HDCVI IR Vandal Dome Camera - 50Mtr.****Main Features**

- 1/2" 8Megapixel progressive scan CMOS
- Max. 15fps@3840×2160
- 3.7-11mm motorized lens
- Up to 500m transmission with RG59 coaxial cable
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR, AWB, AGC, BLC, HLC
- 3x optical motorized zoom lens
- IR Range of 50 Mtrs.
- IP67, IK10

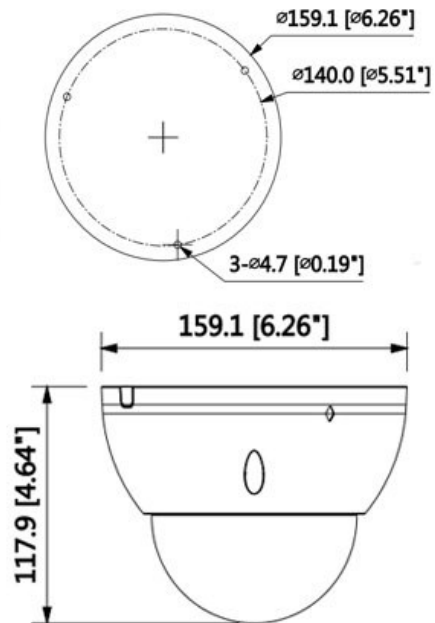

CP- UVC-VC4K08ZL5H-VD**4K WDR HDCVI IR Vandal Dome Camera - 50Mtr.****Feature**

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Gain Control (AGC)
Lens
S/N Ratio
Back Light Compensation
Angle of View
Video Streaming
Video Output
Resolution
ICR
Audio Input
Alarm IN
Alarm Out
IR
OSD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/2" CMOS
3840(H)×2160(V), 8MP
0.01Lux/F1.5(Color), 30IRE,0lux/F1.5(B/W)
1/1s~1/100,00s
Auto / Manual
Auto
3.7-11mm motorized Lens
More than 65dB
BLC / HLC / WDR(120dB)
H: 112°~46°
PAL:3840×2160@12.5fps,2560x1440@25fps; NTSC:3840×2160@15fps,2560x1440@30fps
1-channel HDCVI 4K video output & 1-channel CVBS video output
8MP (3840×2160)
Auto (ICR) / Manual
1 channel
2 channel
1 channel
IR Range of 50 Mtr.
Multi-language
-40°C~+60°C/ Less than 95%RH
12V DC ±25%/24V AC ±25%
Max 12.4W
IP67 & IK10
Φ159.1mm×117.9mm (Φ6.26"×4.64")
0.90kg