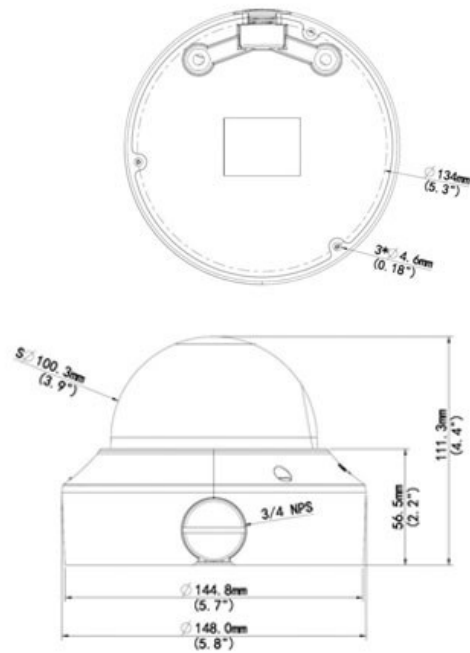


**CP-VNC-V21ZR3-VMDS****2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.****Main Features**

- 1/2.8" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- Ultra 265, H.265, H.264, MJPEG Triple-stream encoding
- Support Super Starlight Function
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR, Corridor Mode, ROI, AWB, AGC, BLC, HLC
- 2.7~13.5mm Motorized Lens
- IR Range of 30 Mtrs, Smart IR, Micro SD, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**InstaStream****CE FC** **RoHS**  
COMPLIANT

# CP- VNC-V21ZR3-VMDS

## 2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.

### Feature

Image Sensor  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Lens  
 DORI Distance  
 Gain Control (AGC)  
 Angle of View  
 Video Compression  
 S/N Ratio  
 BLC  
 Video Streaming  
 Resolution  
 Video Output  
 Frame Rate  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Audio Input  
 Audio Output  
 Audio Compression  
 Audio  
 Alarm IN  
 Alarm Out  
 Network Storage  
 Protocol  
 Ethernet

### Specification

1/2.8" 2MP Progressive scan CMOS  
 Colour: 0.0005 Lux (F1.2, AGC ON) 0Lux with IR  
 Auto/Manual, 1~1/100000 s  
 Auto/Manual  
 2.7~13.5mm Motorized Lens  
 2.7mm- 41.9 Detect (m) , 16.8 Observe (m), 8.4 Recognize (m), 4.2 Identify (m)  
 13.5mm- 209.5 Detect (m) , 83.8 Observe (m), 41.9 Recognize (m), 20.9 Identify (m)  
 Auto/Manual  
 121.36° ~33.51° (H), 60.2° ~ 13.2° (V), 157.8° ~ 41.2° (O)  
 Ultra 265,H.265,H.264,MJPEG  
 >52dB  
 BLC/HLC/WDR(120dB)  
 Triple  
 1920 x 1080  
 1 BNC, impedance 75 Ω; amplitude 1 V [p-p]  
 Main Stream: 2MP (1920×1080): Max. 30 fps; Sub Stream: 2MP (1920×1080): Max. 30 fps;  
 Third Stream: D1 (720×576): Max. 30 fps  
 Up to 4 areas  
 Up to 8 areas  
 IR-cut filter with auto switch (ICR)  
 Up to 8 areas  
 impedance 35 kΩ; amplitude 2 V [p-p]  
 impedance 600 Ω; amplitude 2 V [p-p]  
 G.711  
 Two-way audio Supported  
 1 channel  
 1 channel  
 ANR, NAS(NFS)  
 IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP,  
 UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, ONVIF (Profile S, Profile G), API  
 1 RJ45 10M/100M Base-TX Ethernet

**CP- VNC-V21ZR3-VMDS****2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.****Feature**

IR  
OSD  
Micro SD  
Casing  
Operating Temperature  
Humidity  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

**Specification**

IR Range of 30 Mtr. ,Smart IR  
Up to 8 OSDs  
Micro SD, up to 256GB  
Metal + Plastic  
-40°C ~ +60°C (-40°F ~ 140°F)  
<95% RH (non-condensing)  
DC12V±25%, PoE (IEEE802.3 af)  
Max.8.7w  
IP67 & IK10  
Φ148 x 111.3 mm (Ø5.8" x 4.4")  
0.92kg