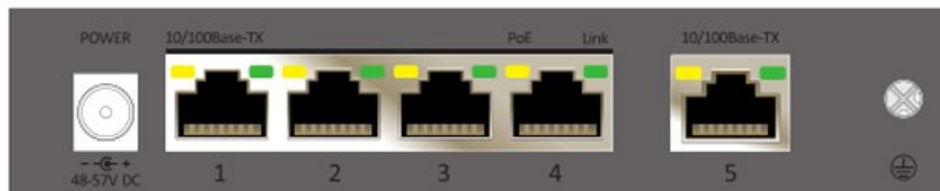


**CP- TNW-HP4H1-6****5 Port Fast Ethernet Switch with 4 POE****Main Features**

- 4×10/100Base-TX Ethernet ports (PoE ports) and 1×10/100Base-TX up-link port
- Support IEEE802.3af/at standards, Max. 30W output of single port
- 1~4 downlink ports can only communicate with uplink ports, extend transmission distance up to 250m(10Mbps)
- 6KV surge protection, 8KV ESD immunity and anti-interference
- Easy and safe installation: wall-mounting, desktop, Kensington security slot , Plug-and-play

# CP- TNW-HP4H1-6

## 5 Port Fast Ethernet Switch with 4 POE

### Feature

Power Supply

Network Standard

Packet Forwarding Rate

Exchange Capacity

MAC Address List

Transmission Distance

Ethernet Speed

Packet Buffer

PoE Power Budget

Ethernet Port Light

Surveillance Module Light

Power Source

Operating Temperature

Power Consumption

Pluse Group

Storage Temperature

ESD

Anti-thunder Level

Humidity

Dimensions

Color

Weight

Power Light

### Specification

Power Adaptor

Support IEEE 802.3/802.3u/IEEE802.3ab/IEEE802.3z/IEEE802.3x

0.74Mpps

1.0Gbps

2K

1-4 port: Default 0 100m , CCTV: 0~250m , UPLINK: 100m

1-4 port Default:10 100Mbps, CCTV:10Mbps , Uplink port 100Mbps

768K

60W

2pcs(Yellow&Green) on RJ45 yellow indicates PoE, green indicates Link Act

1pc(Green), green indicates CCTV

DC48V~54V

-10°C~55°C

<5W

Level 3 Standard: IEC61000 4 4

-40°C~85°C

Contact Discharge 6KV , Air Discharge Level 8KV , Standard: IEC61000-4-2

Common mode 6KV , Standard: IEC61000 4 5

0~95%

135mm x 85.6mm x 27mm

Gray

315g

1pc(Red)