


# CP- TNW-HP8H1-12

9 Port Fast Ethernet switch with 8 POE

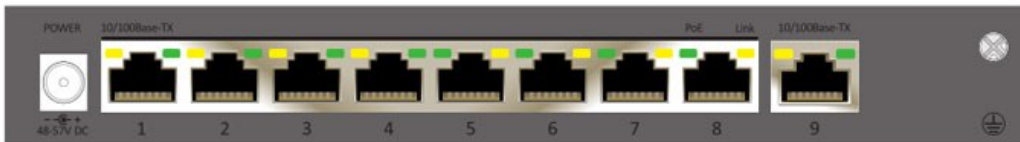

## Main Features

- 1pc 100Mbps uplink Ethernet port, 8 pcs100Mbps downlink Ethernet ports every port supports MDI/MDIX
- One key CCTV mode; 1~8 downlink ports can only communicate with uplink ports; Restrain network storm under 3Mbps
- Extend downlink ports transmission distance to 250m
- Standard: Meet IEEE802.3 , IEEE802.3u , IEEE802.3 af/at standards, PoE use End-Span, the spare cable can be of other use
- Protection: Excellent anti-thunder, anti-static and anti-interference ability

# CP- TNW-HP8H1-12

## 9 Port Fast Ethernet switch with 8 POE

### Feature

Power Supply  
Packet Forwarding Rate  
Ethernet Standard  
Buffer  
Exchange Capacity  
Transmission Distance  
MAC Address List  
Ethernet Speed  
PoE Power Budget  
CCTV Mode  
Ethernet Port Light  
Operating Temperature  
Power Consumption  
Pluse Group  
Storage Temperature  
ESD  
Humidity  
Anti-thunder Level  
Dimensions  
Color  
Weight  
Power Light

### Specification

Power Adapter  
1.34Mpps  
IEEE 802.3/802.3u/802.3af/at  
768K  
1.8Gbps  
1~8 ports: Default:0~100m; CCTV:0~250m; Uplink:0~100m  
2K  
1~8 ports:Default:10/100Mbps; CCTV:10Mbps; UPLINK:100Mbps  
120W  
1pc (Green), green indicates CCTV  
2pc (Yellow & Green) on RJ45,yellow indicates PoE, green indicates Link/Act  
-10°C~+55°C  
<5W  
Level 3 Standard: IEC61000-4-4  
-40°C~+85°C  
6KV/8KV Standard: IEC61000-4-2  
0~95%  
Common mode 6KV Standard: IEC61000-4-5  
200mm x 101.8mm x 27mm  
Gray  
500g  
1pcs (Red)