
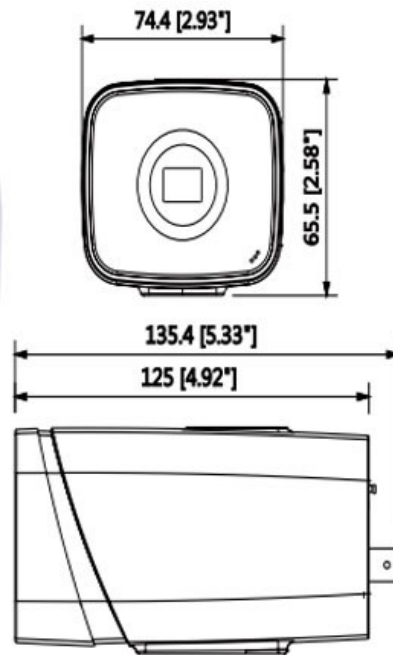


CP- UNC-BE41E-VMD**4MP Full HD WDR IR Network Box Camera****Main Features**

- 1/3" 4Megapixel PS CMOS Image Sensor
- 25/30fps@4MP(2688×1520)
- C/CS Mount Lens
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), EIS, 3DNR, AWB, AGC, BLC
- Auto back focus (ABF)
- Micro SD Card, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-BE41E-VMD

4MP Full HD WDR IR Network Box Camera



Feature

Image Sensor

Effective Pixels

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control (AGC)

Video Compression

Back Light Compensation

S/N Ratio

Video Streaming

Resolution

Video Output

Digital Zoom

Motion detection

Privacy Mask

ICR

ROI

Audio Input

Audio Output

Audio Compression

Alarm IN

Alarm Out

Bit Rate

Interface

Protocol

Smart Detection

Ethernet

Specification

1/3" 4Megapixel progressive scan CMOS

2688(H) x 1520(V)

0.02Lux/F1.2(Color,1/3s,30IRE) 0.2Lux/F1.2(Color,1/30s,30IRE) 0.01Lux/F1.2(B/W,1/3s,30IRE)
0.1Lux/F1.2(B/W,1/30s,30IRE)

Auto/Manual, 1/3~1/100000s

Auto/Natural/Street Lamp/Outdoor/Manual

C/CS

Auto/Manual

H.265+/H.265/H.264+/H.264

BLC / HLC / WDR(120dB)

More than 50dB

Main Stream: 4MP(1~25/30fps), Sub Stream: D1(1~25/30fps), Third Stream: 720P
(1~25/30fps)

4MP(2688x1520)/3MP(2304x1296)/ 1080P(1920x1080)/1.3MP(1280x960)/ 720P
(1280x720)/D1(704x576/704x480)

1 port(BNC,1Vp-p,75Ω)

16x

Off / On (4 Zone, Rectangle)

Off / On (4 Area, Rectangle)

Auto (ICR)/Color/B/W

Off / On (4 Zone)

1 Ch.

1 Ch.

G.711a/ G.711Mu/ AAC/ G.726

2 channel In: 5mA 5VDC

1 channel Out: 300mA 12VDC

H.264: 24K ~ 10240Kbps , H.265: 14K ~ 9984Kbps

1 RS485 port

HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS;
UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI

Tripwire, Intrusion, Object Abandoned/Missing, Face Detection

RJ-45 (10/100Base-T)



CP- UNC-BE41E-VMD**4MP Full HD WDR IR Network Box Camera****Feature**

User Account

Smart Phone

Micro SD

Audio

Operating Temperature

Power Source

Power Consumption

Dimension

Weight

Specification

20 Users

iPhone, iPad, Android Phone

Micro SD card 128GB

1 Built-in Mic

-30°C~+60°C, Less than 95% RH

DC12V, AC24V, PoE(802.3af)

<8W

135.4mm × 74.4mm × 65.5mm

0.66Kg