
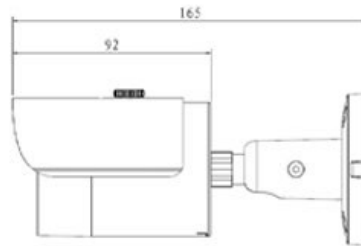


**CP- UNC-TA21L3****2 MP Full HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



**CP- UNC-TA21L3****2 MP Full HD IR Bullet Camera - 30Mtr.****Feature**

Image Sensor  
Minimum Illumination  
Effective Pixels  
Shutter Speed  
White Balance  
Gain Control(AGC)  
Lens  
Back Light Compensation  
S/N Ratio  
Video Compression  
Video Streaming  
Resolution  
Privacy Mask  
ICR  
Bit Rate  
  
Protocol  
  
Ethernet  
User Account  
Smart Phone  
IR  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

**Specification**

1/2.7" 2MP Progressive scan CMOS  
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)  
1920(H) x 1080(V), 2 Megapixels  
Auto/Manual, 1s~1/100000s  
Auto/Manual  
Auto/Manual  
3.6mm (6mm optional)  
BLC/ HLC/ DWDR  
More than 50dB  
H.264/ H.264H/ H.264B/ MJPEG  
Main Stream: 1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)  
1080P(1920x1080)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)  
Up to 4 areas  
Auto(ICR)/Color/B/W  
H.264: 4kbps~8192bps  
  
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI  
  
RJ-45 (10/100Base-T)  
20 Users  
iPhone, iPad, Android, Windows Phone  
IR Range of 30 Mtr.  
-30°C~+60°C, Less than 95%RH  
DC12V, PoE (802.3af)  
<4.8W(IR on)  
IP67  
Φ70mm×165mm  
0.38Kg(0.44 with packaging)