
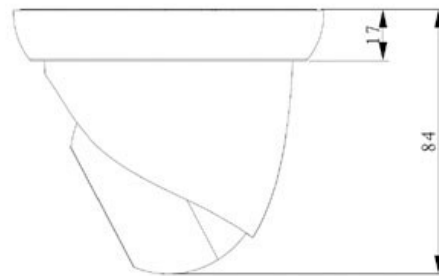


CP- UNC-DA20L3S**2 MP Full HD IR Dome Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP HQIS Pro Image Sensor
- Max 25/30fps@2MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

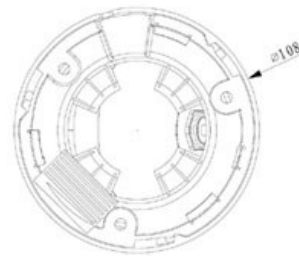

CP- UNC-DA20L3S

2 MP Full HD IR Dome Camera - 30Mtr.



Feature

Image Sensor

Minimum Illumination

Shutter Speed

White Balance

Gain Control (AGC)

Lens

Back Light Compensation

S/N Ratio

Video Compression

Resolution

Frame Rate

Privacy Mask

ICR

Protocol

Ethernet

User Account

Smart Phone

IR

Ingress Protection

Operating Temperature

Power Source

Power Consumption

Dimension

Weight

Specification

1/3" 2MP HQIS Pro Image Sensor

0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)

Auto/Manual, 1s~1/100000s

Auto/Manual

Auto/Manual

3.6mm (6mm optional)

BLC/ HLC/ DWDR

More than 50dB

H.264/ H.264H/ H.264B/ MJPEG

1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480)/CIF(352×288/352×240)

Main Stream :1080P(1 ~ 25/30fps),Sub Stream :D1(1 ~ 25/30fps)

Up to 4 areas

Auto (ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, ONVIF, QoS, Bonjour

RJ-45 (10/100Base-T)

20 Users

iPhone, iPad, Android, Windows Phone

IR Range of 30 Mtr.

IP67

-30°C~+60°C, Less than 95%RH

DC12V, PoE (802.3af)

<3.8W(IR on)

Φ108mm × 84mm

0.25 Kg (with package 0.38Kg)