
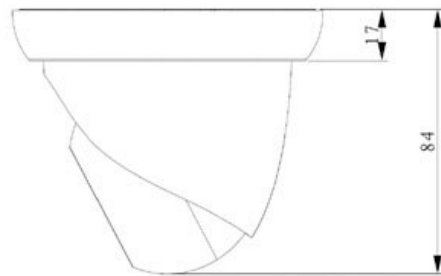


CP- UNC-DA30L3S**3 MP HD IP Dome Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 25fps@3MP, 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.8mm fixed lens (3.6mm optional)
- Array Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

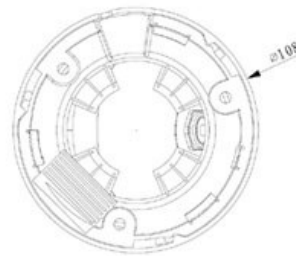

CP- UNC-DA30L3S

3 MP HD IP Dome Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
S/N Ratio
Back Light Compensation
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Protocol
Ethernet
User Account
Smart Phone
IR
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 3MP Progressive scan CMOS
0. 1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
2.8mm fixed lens (3.6mm optional)
More than 50dB
BLC/ HLC/ DWDR
H.264 / MJPEG
Main Stream: 3M(1 ~ 25fps)/1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
3M(2048×1536)/1080P(1920×1080)/720P(1280×720)/ D1(704×576/704×480) /CIF
Up to 4 areas
Auto(ICR)/Color/B/W
HTTP;TCP;ARP;RTSP;RTP;UDP;SMTP;FTP;DHCP;DNS;DDNS;IPv4/v6;QoS;UPnP;NTP, ONVIF, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<3.7W(IR on)
IP67
Φ108mm×84mm
0.25Kg(with package 0.38Kg)