


CP- UNC-TA30L3S**3 MP HD IP Bullet Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 25fps@3MP, 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.8mm fixed lens (3.6mm optional)
- Array Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

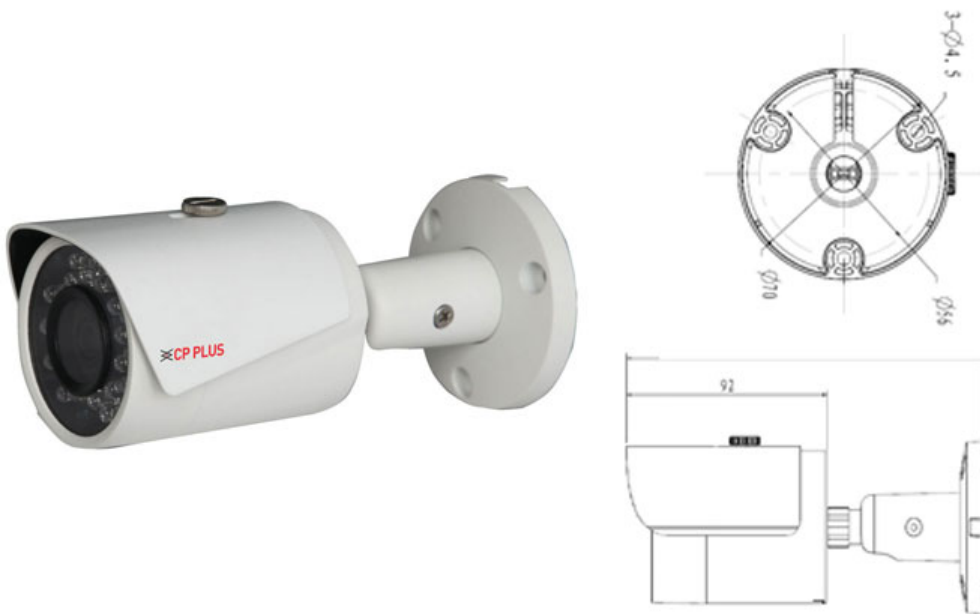

CP- UNC-TA30L3S

3 MP HD IP Bullet Camera - 30Mtr.

Feature

Image Sensor

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control(AGC)

Back Light Compensation

S/N Ratio

Video Compression

Video Streaming

Resolution

Privacy Mask

ICR

Protocol

Ethernet

User Account

Smart Phone

IR

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

1/3" 3MP Progressive scan CMOS

0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)

Auto/Manual, 1/3(4)~1/10000s

Auto/Manual

2.8mm fixed lens (3.6mm optional)

Auto/Manual

BLC/ HLC/ DWDR

More than 50dB

H.264 / MJPEG

Main Stream: 3M(1 ~ 25fps)/1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)

3M(2048×1536)/1080P(1920×1080)/720P(1280×720)/ D1(704×576/704×480) /CIF

Up to 4 areas

Auto(ICR)/Color/B/W

HTTP;TCP;ARP;RTSP;RTP;UDP;SMTP;FTP;DHCP;DNS;DDNS;IPv4/v6;QoS;UPnP;NTP, ONVIF, CGI

RJ-45 (10/100Base-T)

20 Users

iPhone, iPad, Android, Windows Phone

IR Range of 30 Mtr.

-30°C~+60°C , Less than 95%RH

DC12V, PoE (802.3af)

Max 3.7W(IR on)

IP67

Φ70mm×165mm

0.38Kg(with package 0.44 Kg)