


CP- UNC-TH4K12ZL5-VM**12MP 4K IP IR Bullet Camera - 50Mtr.****Main Features**

- 1/1.7" 12Megapixel progressive scan CMOS
- Max 15fps@12 MP / 25/30fps@4K
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 4.1mm ~16.4mm motorized lens
- IR Range of 50 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

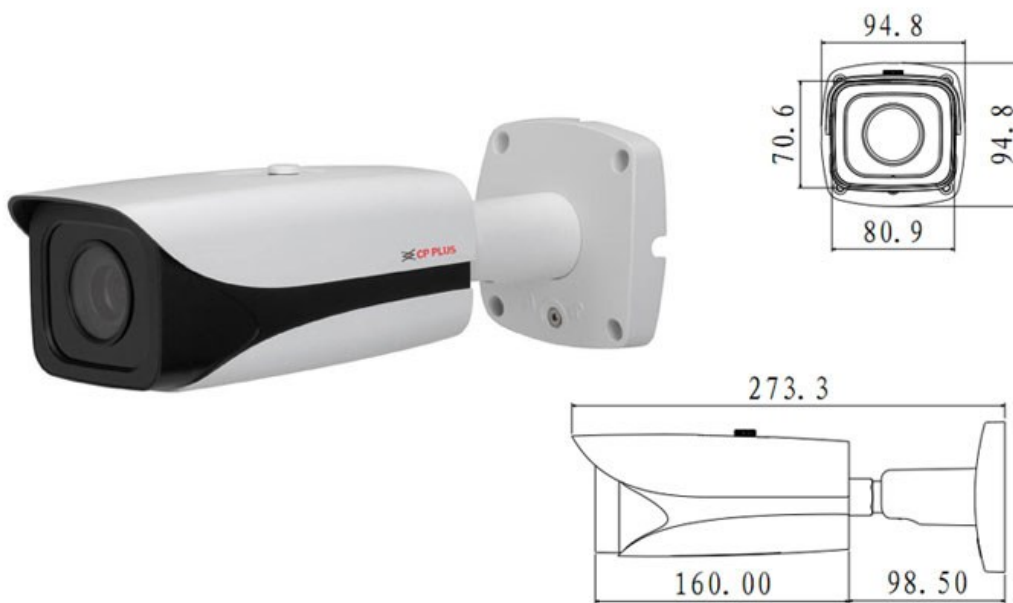

CP- UNC-TH4K12ZL5-VM

12MP 4K IP IR Bullet Camera - 50Mtr.



Feature

Image Sensor

Effective Pixels

Minimum Illumination

Shutter Speed

White Balance

Gain Control(AGC)

Lens

S/N Ratio

Back Light Compensation

Video Compression

Video Output

Resolution

Frame Rate

Privacy Mask

ICR

ROI

Audio Input

Audio Output

Audio Compression

Alarm IN

Alarm Out

Bit Rate

Protocol

Smart Detection

Ethernet

User Account

IR

Smart Phone

Specification

1/1.7" 12MP Progressive scan CMOS

4000(H) x 3000(V)

0.05Lux/F1.4(Color); 0Lux/F1.4(IR on)

Auto/Manual, 1/3(4)~1/100000s

Auto/Sunny/Night/Outdoor/Customized

Auto/Manual

4.1mm~16.4mm

More than 50dB

BLC / HLC / DWDR

H.264/H.264B/H.264H/ MJPEG

1 channel BNC (1.0Vp-p,75Ω)

12M(4000x3000)/8M(4096x 2160)/8M(3840x 2160)/1080P(1920x 1 080)/720P(1280x 720) / D1(704x 576) /CIF(352x 288)

Main Stream: 12M(1~15fps)/ 8M(4096x2160) (1~25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 1080P/720P/D1(1 ~ 25/30fps)

Up to 4 areas

Auto(ICR)/Color/B/W

Up to 4 areas

1 Channel

1 Channel

G.711a / G.711u/AAC

2 Channel

1 Channel

H.264: 32Kbps~ 16Mbps

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour,802.1x, ONVIF, PSIA, CGI

Tripwire, Intrusion,Scene change, Missing/Abandoned, Audio detect, Defocus detect, Face

RJ-45 (10/100/1000Base-T)

20 Users

IR Range of 50 Mtr.

iPhone, iPad, Android Phone



CP- UNC-TH4K12ZL5-VM**12MP 4K IP IR Bullet Camera - 50Mtr.****Feature**

Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

Micro SD, Max 128GB
-30°C~+60°C, Less than 95% RH
DC12V(AC24V optional), PoE (802.3at)
Max24W (IR on)
IP67
272.9mm× 94.3mm× 94.3mm
0.8Kg