
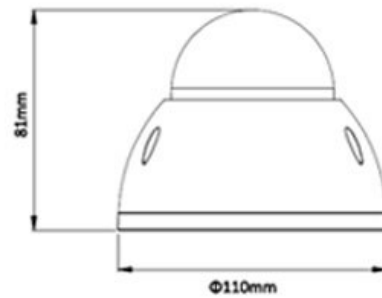


CP- UNC-VA30L3-M**3MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M(2048×1536)&25/30fps@1080P(1920×1080)
- H.264 & MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VA30L3-M

3MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR

Specification

1/3" 3MP Progressive scan CMOS
0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1s~1/100000s
Auto/Manual
3.6mm (6mm optional)
Auto/Manual
BLC/ HLC/ DWDR
More than 50dB
H.264/H.264H/H.264B/MJPEG
Main Stream: 3M(1 ~ 20fps)/1080P(1 ~ 25/30fps), Extra Stream: D1(1 ~ 25/30fps)
3M(2048x1536) / 1080P(1920x1080) / 720P(1280x720) / D1(704x576/704x480) / CIF
Up to 4 areas
Auto(ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

RJ 45 (10/100Base T)

20 Users

IR Range of 30 Mtr.

iPhone, iPad, Android, Windows Phone

Max 128GB

-30°C~+60°C, Less than 95% RH

DC12V, PoE (802.3af)

<4.7W(IR ON)

IP67

Φ 110mm × 81mm

0.47kg