
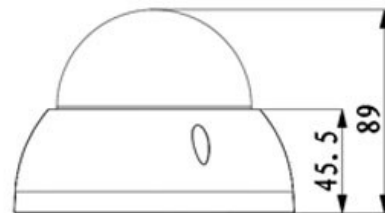


CP- UNC-VB20FL3S-M-V2**2 MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.7~12mm varifocal lens
- IR Range of 30 Mtrs, Memory Card, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VB20FL3S-M-V2

2 MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR
Protocol
Ethernet
User Account
IR
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 2MP Progressive scan CMOS
0.01Lux/F1.4(Color); 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
2.7mm~12mm Varifocal Lens
Auto/Manual
H.264 / H.264+
More than 50dB
BLC/ HLC/ DWDR
Main Stream: 1080P/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1080P(1920× 1080) / 720P(1280× 720) / D1(704× 576/704× 480) /CIF(352× 288/352× 240)
Up to 4 areas
Auto (ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF, CGI
RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android Phone
Micro SD, Max 128GB
-30°C~+60°C, Less than 95% RH
DC12V, PoE (802.3at)
Max 7.5W
IP67,IK10
Φ122mm × 89mm
0.5kg

