
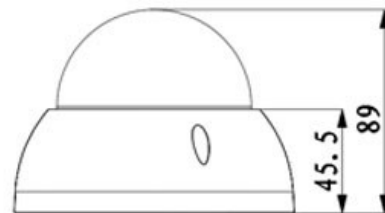


CP- UNC-VB13ZL3-VMD**1.3 MP HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.7 -12mm Motorized Lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-VB13ZL3-VMD

1.3 MP HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor

Minimum Illumination

Shutter Speed

White Balance

Gain Control (AGC)

Lens

Back Light Compensation

S/N Ratio

Video Compression

Video Streaming

Resolution

Privacy Mask

ICR

Audio Input

Audio Compression

Audio Output

Alarm IN

Alarm Out

Protocol

Ethernet

User Account

IR

Smart Phone

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

1/3" 1.3MP Progressive scan CMOS

0.1Lux/F1.4(Color), 0Lux/F1.4(IR on)

Auto/Manual, 1/3(4)~1/100000s

Auto/Manual

Auto/Manual

2.7 -12mm Motorized Lens

BLC/ HLC/ WDR(120dB)

More than 50dB

H.264/MJPEG

Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)

1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)

Up to 4 areas

Auto (ICR)/Color/B/W

1 Ch.

G.711a / G.711u

1 Ch.

1 Ch.

1 Ch.

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)

20 Users

IR Range of 30 Mtr.

iPhone, iPad, Android Phone

Micro SD, Max 128GB

-30°C~+60°C, Less than 95%RH

DC12V, PoE (802.3af)

<7.5W

IP67 & IK10

φ122mm × 89mm

500g

