


CP- UNC-TA30L8S-V2**3 MP HD IR IP Bullet Camera - 80Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M(2048x1536) and 25/30fps@1080P(1920x1080)
- H.264Plus and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.8mm fixed lens (3.6mm, 6mm optional)
- IR Range of 80 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

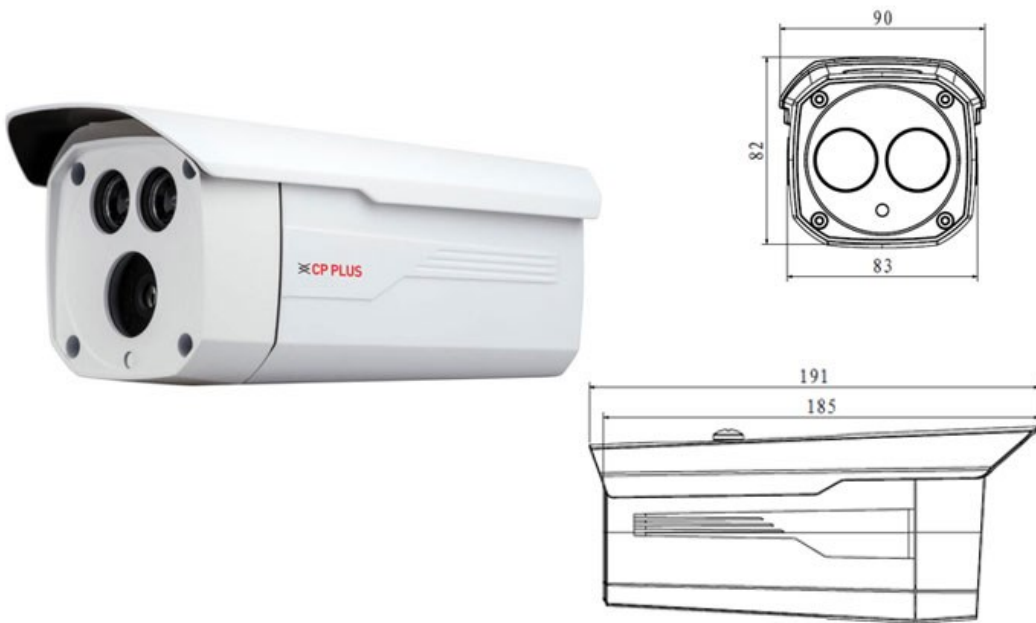

CP- UNC-TA30L8S-V2

3 MP HD IR IP Bullet Camera - 80Mtr.



Feature

Image Sensor

Minimum Illumination

Effective Pixels

Shutter Speed

White Balance

Lens

Gain Control(AGC)

S/N Ratio

Video Compression

Back Light Compensation

Video Streaming

Resolution

Privacy Mask

ICR

Bit Rate

Protocol

Ethernet

User Account

Smart Phone

IR

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

1/3" 3MP Progressive scan CMOS

0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)

2304(H) x 1296(V)

Auto/Manual, 1/3(4)s ~1/100000s

Auto/Manual

2.8mm (3.6mm 6mm optional)

Auto/Manual

More than 50dB

H.264+/H.264

BLC/ HLC/ DWDR

Main Stream: 3M(1 ~ 20fps)/ 1080P(1 ~ 25/30fps), Extra Stream: D1(1 ~ 25/30fps)

3M(2048x1536)/1080P(1920x1080)/720P(1280x720)/ D1(704x576/704x480) /CIF

Up to 4 areas

Auto(ICR)/Color/B/W

H.264: 5kbps~8192bps

IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, ONVIF, CGI

RJ-45 (10/100Base-T)

20 Users

iPhone, iPad, Android Phone

IR Range of 80 Mtr.

-30°C~+60°C, Less than 95%RH

DC12V, PoE (802.3af)

<4W(IR on)

IP67

191mm x 90mm x 82mm

0.45Kg