


CP- UNP-F2521L15-DA

2MP 1080P IR IP PTZ Camera

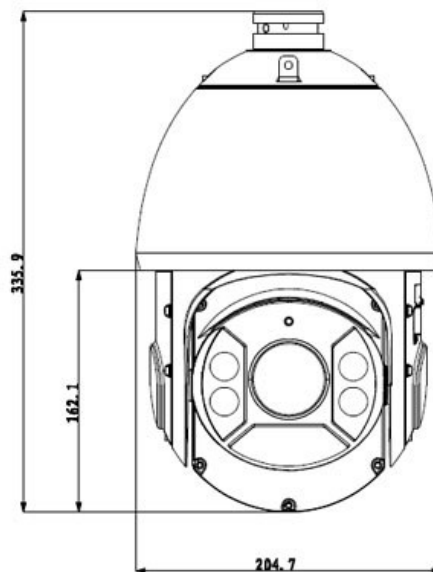

Main Features

- 1/2.8" 2MP Exmor PS CMOS Image sensor
- Max. 50/60fps@1080P, 25/30/50/60fps@720P
- Powerful 25x Optical and 16x Digital zoom
- WDR(120dB), 3D DNR, Day/Night(ICR), Defog, ROI, EIS, AGC, BLC, HLC
- Up to 300 Presets, 8 auto scan, 8 tour, 5 pattern, 8 auto pan
- IR Range of 150 Mtr.
- Max 240° /s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNP-F2521L15-DA

2MP 1080P IR IP PTZ Camera



Feature

Image Sensor
Effective Pixels
Video Output
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Focus Control
Close Focus Distance
Angle of View
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Manual Speed
Presets
Preset Speed

Special Features
Privacy Masking
Power up Action
Idle Motion
Day/Night: IR Cut Filter
Video Compression
Video Streaming

Frame Rate
Audio Compression
Motion Detection

Specification

1/2.8" Exmor PS CMOS
1920(H) x 1080(V), 2 Megapixels
1 Channel
More than 55dB
Color: 0.005Lux@F1.6; 0Lux@F1.6 (IR on)
4.8mm~120mm
Auto, ATW, Indoor, Outdoor, Manual
Auto / Manual
100mm~ 1000mm
H: 59.2° ~ 2.4°
Auto / Manual
BLC / HLC / WDR(120dB)
25x
16x
0°~360° endless, Pan Speed: 0.1° ~ 160°/sec
-15° ~ 90° auto flip 180°, Tilt Speed: 0.1° ~120°/sec
Pan: 0.1° ~160° /s; Tilt: 0.1° ~120° /s
300
Pan: 240° /s; Tilt: 200° /s

IR Range upto 150m, (Auto IR On/Off), Auto IR Intensity, 5 Pattern, 8 Tour, 8 Auto Pan ,8 Auto Scan
Up to 24 areas
Auto restore to previous PTZ and lens status after power failure
Activate Preset/ Scan/ Tour/ Pattern if there is no command in the specified period
Auto(ICR) / Color / B/W
H.265/H.264 / MJPEG
Unicast / Multicast

Main stream: 1080P/720P/1.3M(1 ~ 50/60fps), Sub stream1: D1/CIF(1 ~ 25/30fps), Sub stream2: 1080P/1.3M/720P/D1/ CIF (1 ~ 25/30fps)
G.711a/G.711Mu/AAC/G.722 / G.726/G.729
Supports



CP- UNP-F2521L15-DA

2MP 1080P IR IP PTZ Camera



Feature

ROI
Audio Streaming
Auto Tracking
IVS
Networking
Protocols
General Function
Alarm
Alarm Event
Max Remote Users
Operating Temperature
Smart Phone
Memory Slot
Weather Proof Standard
Dimension
Weight
Power Source
Power Consumption

Specification

Supports
1/1 channel In/Out
Supports
Tripwire, Intrusion, Abandoned/Missing, Face Detection
RJ-45 (10/100Base-T) , 1 RS485
IPv4/IPv6,HTTP,HTTPS,SSL,TCP/IP, UDP, UPnP, ICMP,IGMP,SNMP,RTSP,RTP, SMTP, NTP,DHCP, DNS,PPPOE,DDNS,FTP, IP Filter,QoS,Bonjour,802.1x, ONVIF (Profile S/G) , PSIA, CGI
One-key reset, Anti-Flicker, mirror, password protection, Watermark, IP address filtering, HTTPS encryption, IEEE 802.1X
2/1 channel In/Out
Events / alerts, Video loss, Video Tempering, send via FTP, HTTP, email, Pre-Post alarm video buffering
20 users
-40°C ~ 60°C / Less than 90% RH
iPhone, iPad, Android Phone
Upto 128GB
IP66 & IK10(Optional)
Φ204.7(mm) x 359.9(mm)
7.8kg
AC24V/3A(±10%)
10.5W,26W (IR on)