


# CP- UNP-3021L18-DA

2MP 30x WDR Network IR PTZ Dome Camera - 180 Mtr.

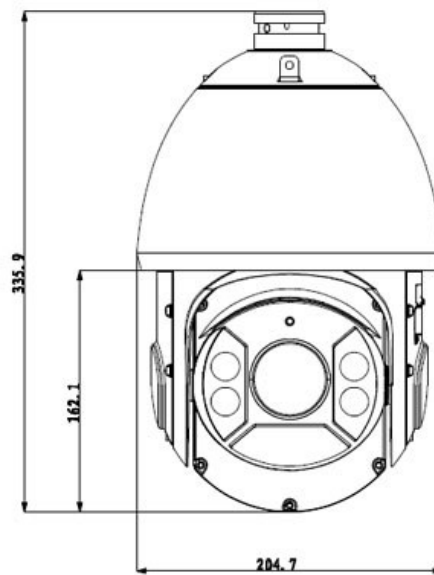

## Main Features

- 1/2.8" CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 30x Optical and 16x Digital zoom
- H.265 Encoding
- WDR, Day/Night (ICR), 3D DNR, Auto iris, Auto focus
- Up to 300 Presets, 8 Tour, 5 Pattern, 8 Auto scan
- Max 240°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66, IK10, Micro SD, 180 Mtr. IR
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP- UNP-3021L18-DA

## 2MP 30x WDR Network IR PTZ Dome Camera - 180 Mtr.



### Feature

Image Sensor  
Effective Pixels  
S/N Ratio  
Minimum Illumination  
Focal Length  
Focus Control  
White Balance  
Close Focus Distance  
Angle of View  
Electronic Shutter  
AGC control  
Back Light Compensation  
Optical Zoom  
Digital Zoom  
Pan Travel  
Tilt Travel  
Presets  
Preset Speed  
Privacy Masking  
Special Features  
Power up Action  
Idle Motion  
Day/Night: IR Cut Filter  
Video Compression  
Video Streaming  
Audio Compression  
Audio Streaming  
Auto Tracking  
Pre/Post Alarm Buffer  
Watermark  
IVS

### Specification

1/2.8" CMOS  
1920(H) x 1080(V) 2Mp  
More than 55dB  
Color: 0.005Lux@F1.6; 0Lux@F1.6 (IR on)  
4.5mm ~ 135.0mm  
Auto / Manual  
Auto, ATW, Indoor, Outdoor, Manual  
1100mm~1000mm  
H: 67.8° ~ 2.4°  
Auto/ Manual, 1/1s~1/300,000s  
Auto / Manual  
BLC / HLC / WDR(120dB)  
30x  
16x  
0° ~ 360° endless, Pan Speed: 0.1° ~160° /s  
-15° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~120°/s  
300  
Pan: 240° /s; Tilt: 200° /s  
Up to 24 areas  
IR Range of 180 Mtr., EIS, ROI, Defog, Up to 300 Presets, 5 Pattern, 8 Tour, Auto Pan, Auto  
Auto restore to previous PTZ and lens status after power failure  
Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period  
Auto (ICR) / Color / B/W  
H.265+/H.265/H.264+/H.264  
Main stream: 1080P/1.3M/720P(1~50/60fps) , Sub stream1: D1/CIF(1 ~ 25/30fps) , Sub  
stream2: 1080P/1.3M/720P/D1/CIF (1~25/30fps)  
G.711a/G.711Mu/AAC/G.722 / G.726/G.729/MPEG2-L2  
1/1 channel In/Out  
Supports  
Supports  
Supports  
Tripwire, Intrusion, Abandoned/Missing, Face Detection



# CP- UNP-3021L18-DA

2MP 30x WDR Network IR PTZ Dome Camera - 180 Mtr.



## Feature

Networking

Protocols

Alarm

Max Remote Users

Operating Temperature

Smart Phone

Memory Slot

Weather Proof Standard

Casing

Dimension

Weight

Power Source

Power Consumption

## Specification

RJ-45 (10/100Base-T), 1RS485

IPv4/IPv6,HTTP,HTTPS,SSL,TCP/IP, UDP, UPnP, ICMP,IGMP,SNMP,RTSP,RTP, SMTP, NTP,DHCP,DNS,PPPOE,DDNS,FTP, IP Filter,QoS,Bonjour,802.1x, ONVIF (Profile S), PSIA, CGI

2/1 channel In/Out

20 users

-40°C ~ 60°C (-40°F ~ +140°F) / Less than 90% RH

iPhone, iPad, Android Phone

Micro SD, Max 128GB

IP66 & IK10

Aluminium Alloy

Φ205(mm) x 336(mm)

7.8 kg

AC24V/3A(±10%)

10.5W,26W (IR on)