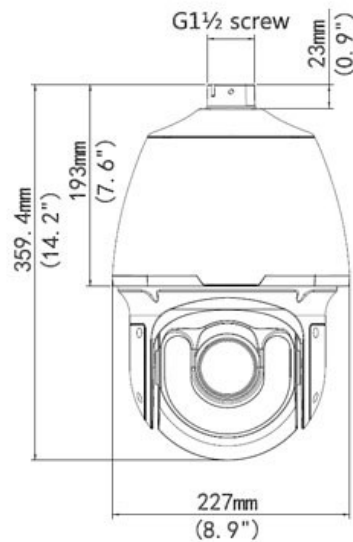


CP- VNP-3321L20-DAS**2MP Full HD WDR Network IR PTZ Camera - 200 Mtr.****INDIGO****Main Features**

- 1/2.8" 2 MP PS Image Sensor
- Max.60 fps@1080P (1920×1080)
- Powerful 33x Optical Zoom
- WDR(120 dB), Day/Night (ICR), Digital De-fog, EIS, BLC, HLC, AWB
- Ultra H.265, H.265, H.264, MJPEG Triple Stream Supported
- Up to 1024 Presets, Preset patrol, route patrol, Recorded patrol
- Max 240°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66
- IR Range of 200 Mtr., Micro SD Card
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**Instastream****CE FC****RoHS COMPLIANT**

CP- VNP-3321L20-DAS**2MP Full HD WDR Network IR PTZ Camera - 200 Mtr.****Feature**

Image Sensor
Video Output
S/N Ratio
Minimum Illumination
Focal Length
Focus Control
White Balance
Angle of View
Iris Control
Electronic Shutter
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Preset Speed
Special Features
Privacy Masking
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Frame Rate
Audio Compression
Audio Streaming
Networking
IVS

Specification

1/2.8" 2MP CMOS Starlight Technology
1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
More than 52dB
Colour: 0.002 Lux (F1.6, AGC ON) 0 Lux with IR on
4.5mm ~ 148.5 mm
Auto / Manual
Auto / Manual
62.93° (wide) ~ 3.76° (tele)
Auto/Manual; F1.6 ~ F5.3
Auto/Manual; shutter time: 1/6 s ~ 1/100000 s
Auto / Manual
BLC / HLC / WDR(120dB)
33x
Supports
360° endless, Pan Speed: 0.1°/s ~ 240°/s
-15° ~ +90° (auto reverse), Tilt Speed: 0.1° ~ 160°/sec
1024
Pan: 300° /s; Tilt: 240° /s
IR Range upto 200m, Digital De-Fog, EIS, Up to 1024 Presets, Preset patrol, Route patrol, Recorded patrol
Up to 8 areas
IR-cut filter with auto switch (ICR)
Ultra H.265, H.265, H.264, MJPEG
1080P (1920×1080):Max.60 fps , Triple Stream
1080P (1920×1080): Max.60 fps , 1080P (1920×1080): Max.15 fps , D1 (720×576): Max.8 fps
1080P (1920×1080) : Max.60 fps , 720P (1280×720): Max.30 fps , D1 (720×576): Max.15 fps
G.711a
Two way Talk Supported
10M/100M Base-TX Ethernet, 1 RS485
Intrusion, crossing line, motion detection, Auto tracking, Audio detection, Face detection, People counting

CP- VNP-3321L20-DAS**2MP Full HD WDR Network IR PTZ Camera - 200 Mtr.****Feature**

Protocols

Alarm

Reset Button

ANR Technology

Operating Temperature

Memory Slot

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

IPv4, IGMP, ICMP, ARP, TCP, UDP, L2TP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, ONVIF, API

2 In/1 Out

Yes

Supports

-40°C ~ +70°C (-40°F ~ 158°F), Humidity ≤ 95% RH (non-condensing)

Up to 128 GB

IP66

Ø227 x 359.4 mm (Ø8.9" x 14.2")

5.5kg

24 V AC (Default), 24 V DC

8W ~52.5W