
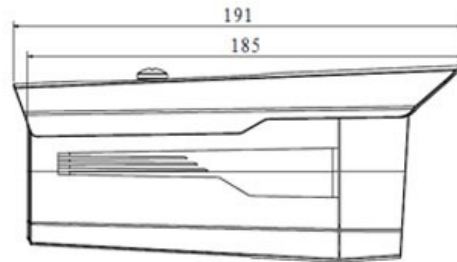


CP-UNC-TA10R3**1 MP HD Array Bullet Camera - 30Mtr.****Main Features**

- 1MP PS CMOS Image Sensor
- Max 25/30fps@720P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-TA10R3**1 MP HD Array Bullet Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR

Specification

1MP Progressive scan CMOS
0. 1Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
3.6mm fixed lens (6mm optional)
BLC/ HLC/ DWDR
More than 50dB
H.264 / MJPEG
Main Stream: 720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
720P(1280×720)/ D1(704×576/704×480) /CIF(352×288/352×240)
Up to 4 areas
Auto(ICR)/Color/B/W

Protocol
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

Ethernet
RJ-45 (10/100Base-T)

User Account
20 Users

Smart Phone
iPhone, iPad, Android, Windows Phone

IR
IR Range of 30 Mtr.

Operating Temperature
-30°C~+60°C , Less than 95%RH

Power Source
DC12V

Power Consumption
Max 4W

Weatherproof Standard
IP67

Dimension
191mm × 90mm × 82mm

Weight
450g