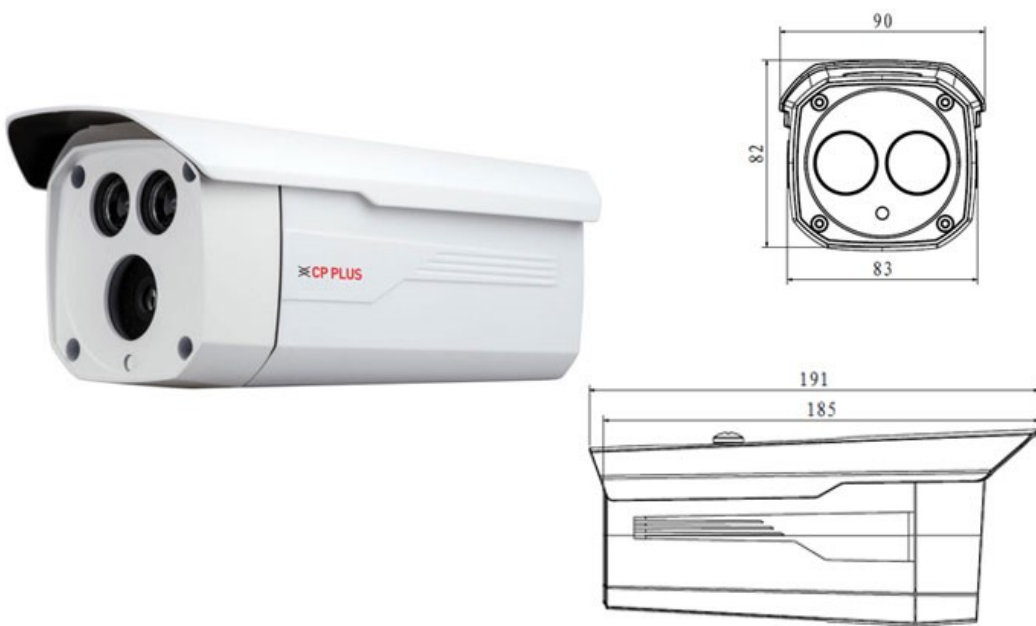


**CP- UNC-TA10R6****1 MP HD Array Bullet Camera - 60Mtr.****Main Features**

- 1MP PS CMOS Image Sensor
- Max 25/30fps@720P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 36 Mtrs, IP67
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro
- H.264 MJPEG dual-stream encoding
- Max 25fps@1080P Resolution

**CP- UNC-TA10R6****1 MP HD Array Bullet Camera - 60Mtr.****Feature**

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Lens  
Gain Control(AGC)  
Video Compression  
S/N Ratio  
Back Light Compensation  
Video Streaming  
Resolution  
Privacy Mask  
ICR  
  
Protocol  
  
Ethernet  
User Account  
IR  
Smart Phone  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

**Specification**

1MP Progressive scan CMOS  
0. 1Lux/F2.1(Color), 0Lux/F2.1(IR on)  
Auto/Manual, 1/3(4)~1/10000s  
Auto/Manual  
3.6mm fixed lens (6mm optional)  
Auto/Manual  
H.264 / MJPEG  
More than 50dB  
BLC/ HLC/ DWDR  
Main Stream: 720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)  
720P(1280×720)/ D1(704×576/704×480) /CIF(352×288/352×240)  
Up to 4 areas  
Auto(ICR)/Color/B/W  
  
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI  
  
RJ-45 (10/100Base-T)  
20 Users  
IR Range of 60 Mtr.  
iPhone, iPad, Android, Windows Phone  
-30°C~+60°C , Less than 95%RH  
DC12V  
Max 4W  
IP67  
191mm × 90mm × 82mm  
450g