
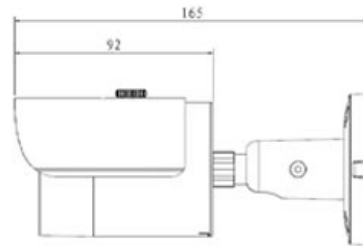


**CP- UNC-TA31L3****3 MP Full HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP-UNC-TA31L3

## 3 MP Full HD IR Bullet Camera - 30Mtr.

### Feature

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Gain Control(AGC)  
Lens  
S/N Ratio  
Video Compression  
Back Light Compensation  
Video Streaming  
Resolution  
Privacy Mask  
ICR

### Specification

1/3" 3MP Progressive scan CMOS  
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)  
Auto/Manual, 1s~1/100000s  
Auto/Manual  
Auto/Manual  
3.6mm (6mm optional)  
More than 50dB  
H.264/MJPEG  
BLC/ HLC/ DWDR  
Main Stream: 3M(1 ~ 20fps)/1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)  
3M(2048×1536)/1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480)/CIF  
Up to 4 areas  
Auto(ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)  
20 Users  
iPhone, iPad, Android, Windows Phone  
IR Range of 30 Mtr.  
-30°C~+60°C , Less than 95%RH  
DC12V, PoE (802.3af)  
<4.8W(IR on)  
IP67  
Φ70mm×165mm  
0.38Kg(0.44 with packaging)

Protocol

Ethernet

User Account

Smart Phone

IR

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight