
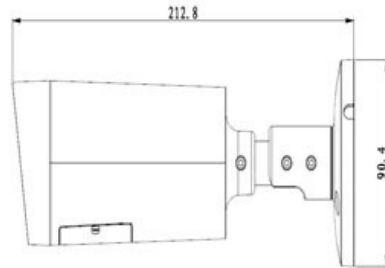


CP- UNC-TB13FL3-MD**1.3 MP HD WDR IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 1.3MP PS CMOS Image Sensor
- 25/30fps@1.3M(1280x960)
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Varifocal Lens
- IR Range of 30 Mtrs, IP66, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

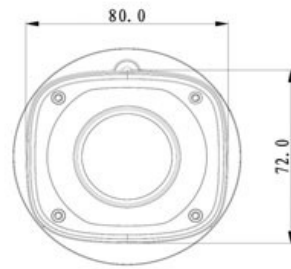

CP- UNC-TB13FL3-MD

1.3 MP HD WDR IR Bullet Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output

Specification

1/3" 1.3MP Progressive scan CMOS
0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
2.7 -12mm Varifocal motorized Lens
Auto/Manual
BLC/ HLC/ WDR(120dB)
More than 50dB
H.264/MJPEG
Main Stream: 1.3M (1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Channel
G.711a / G.711u
1 Channel

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
Micro SD, Max 64GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<4W
IP66
72mm × 80mm × 212.8mm
650g

Protocol

Ethernet

User Account

IR

Smart Phone

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight