
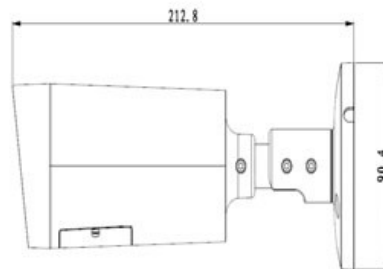


CP-UNC-TB13FL3**1.3 MP HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.8 -12mm Varifocal Lens
- IR Range of 30 Mtrs, IP66, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

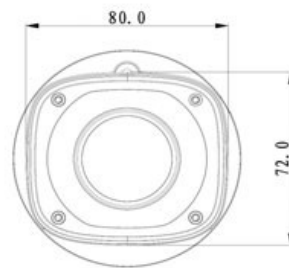

CP- UNC-TB13FL3

1.3 MP HD IR Bullet Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR

Specification

1/3" 1.3MP Progressive scan CMOS
0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
2.8 -12mm Varifocal Lens
Auto/Manual
BLC/ HLC/ DWDR
More than 55dB
H.264/MJPEG
Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)
Up to 4 areas
Auto(ICR)/Color/B/W

Protocol
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

Ethernet
RJ-45 (10/100Base-T)

User Account
20 Users

Smart Phone
iPhone, iPad, Android, Windows Phone

IR
IR Range of 30 Mtr.

Operating Temperature
-30°C~+60°C , Less than 95%RH

Power Source
DC12V, PoE (802.3af)

Power Consumption
<4.5W

Weatherproof Standard
IP66 & IK10

Dimension
72mm × 80mm × 212.8mm

Weight
0.65kg