
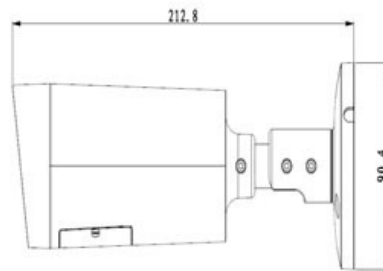


CP- UNC-TB20FL3-MD**2 MP Full HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.7~12mm Varifocal lens
- IR Range of 30 Mtrs, IP66, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-TB20FL3-MD

2 MP Full HD IR Bullet Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Gain Control(AGC)
 Lens
 Video Compression
 Back Light Compensation
 S/N Ratio
 Video Streaming
 Resolution
 Privacy Mask
 ICR
 Audio Input
 Audio Output
 Audio Compression

Specification

1/3" 2MP Progressive scan CMOS
 0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
 Auto/Manual, 1/3(4)~1/10000s
 Auto/Manual
 Auto/Manual
 2.7mm~12mm Lens
 H.264/ H.264H/ H.264B/ MJPEG
 BLC/ HLC/ WDR(120dB)
 More than 50dB
 Main Stream: 1080P/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
 1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1(704x576/704x480) /CIF
 Up to 4 areas
 Auto(ICR)/Color/B/W
 1Ch.
 1Ch.
 G.711a / G.711u

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
 20 Users
 iPhone, iPad, Android, Windows Phone
 IR Range of 30 Mtr.
 Micro SD, Max 64GB
 -30°C~+60°C , Less than 95%RH
 DC12V, PoE (802.3af)
 Max 4.5W
 IP66
 72mm× 80mm× 212.8mm
 0.65kg

Protocol

Ethernet

User Account

Smart Phone

IR

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight