


CP- UNP-3020R50DA**2MP 30x WDR IP Laser PTZ Dome Camera****Main Features**

- 1/1.8" CMOS Image sensor
- Ultra-low light star light camera
- Max 60fps@720P and 30fps@1080P resolution
- Powerful 30x Optical and 16x Digital zoom
- Defog, WDR, Day/Night(ICR), Ultra DNR
- Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Max 240°/s pan speed, 360° endless pan rotation
- Auto-tracking and IVS, IR Range of 500 Mtr.
- Built-in 7/2 alarm in/out, IP67, Hi-PoE, Micro SD
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

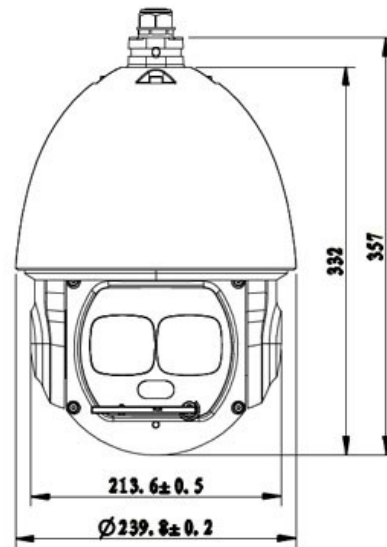

CP- UNP-3020R50DA**2MP 30x WDR IP Laser PTZ Dome Camera****Feature**

Image Sensor

Effective Pixels

Video Output

S/N Ratio

Minimum Illumination

Focal Length

Focus Control

White Balance

Close Focus Distance

Angle of View

Electronic Shutter

AGC control

Back Light Compensation

Optical Zoom

Digital Zoom

Pan Travel

Tilt Travel

Presets

Preset Speed

Special Features

Privacy Masking

Power up Action

Idle Motion

Time Task

Day/Night: IR Cut Filter

Video Compression

Video Streaming

Audio Compression

Audio Streaming

Auto Tracking

Networking

Specification

1/1.8" CMOS

1944(H) x 1092(V), 2 Megapixels

BNC(1.0Vp-p/75Ω), PAL / NTSC

More than 56dB

Color: 0.005Lux@F1.6; B/W: 0.0005Lux@F1.6; 0Lux (IR on)

5mm~150mm

Auto / Manual

Auto, ATW, Indoor, Outdoor, Manual

100mm~ 1000mm

H: 51.2° ~ 1.8°

1/1 ~ 1/30,000s

Auto / Manual

BLC / HLC / WDR

30x

16x

0° ~ 360° endless, Pan Speed: 0.1° ~ 240°/sec

-10° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~ 120°/sec

255

Pan: 240° /s; Tilt: 200° /s

IR Range of 500 Mtr., Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan

Up to 24 areas

Auto restore to previous PTZ and lens status after power failure

Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period

Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time

Auto(ICR) / Color / B/W

H.264 / MJPEG

Main Stream: 1080P/ D1 (1 ~ 25/30fps), 720P(1~50/60fps), Sub Stream1: D1/CIF(1 ~ 25/30fps), Sub Stream 2: 720P/D1/ CIF (1 ~ 25/30fps)

G.711a / G.711u(32kbps)/ PCM(128kbps)

1/1 channel In/Out

Single-scene, multiple-scene, panorama-scene

RJ-45 (10/100Base-T), 1RS485

CP- UNP-3020R50DA

2MP 30x WDR IP Laser PTZ Dome Camera

Feature

IVS

Protocols

Tracking Trigger Mode

Tracking Trigger Event

Alarm

Max Remote Users

Smart Phone

Operating Temperature

Memory Slot

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

Tripwire, Intrusion, Cross Warning Zone, Perimeter Protection, Loitering Detection, Abandoned Object Detection, Missing Object Detection, Illegal Parking, Fast Moving and etc.

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S

Manual / Auto (alarm triggered)

Targeting, Zoom, Tracking, Recording, Snapshot, Alarm and etc.

7/2 channel In/Out

20 users

iPhone, iPad, Android, Windows Phone

-40°C ~ 70°C / Less than 90% RH

Micro SD, Max 64GB

IP67

Φ252(mm) x 384.3 (mm)

6.75 kg

AC24V/3A(±25%), Hi-POE

20W, 43W (IR on, Heater on)