


**CP- UNP-F2521L20-DAP****2MP 25x WDR IR Network PTZ Camera- 200 Mtr.****Main Features**

- 1/2.8" 2MP PS CMOS Image sensor
- Max. 50/60fps@1080P
- Powerful 25x Optical and 16x Digital zoom
- WDR(120dB), 3D DNR, Day/Night (ICR), Defog, ROI, EIS, AGC, BLC, HLC
- Support Starlight Function
- Up to 300 Presets, auto scan, 8 tour, 5 pattern, auto pan
- IR Range of 200 Mtr.
- Max 300° /s pan speed, 360° endless pan rotation
- Built-in 7/2 alarm in/out, IP67, IK10, Support PoE+
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

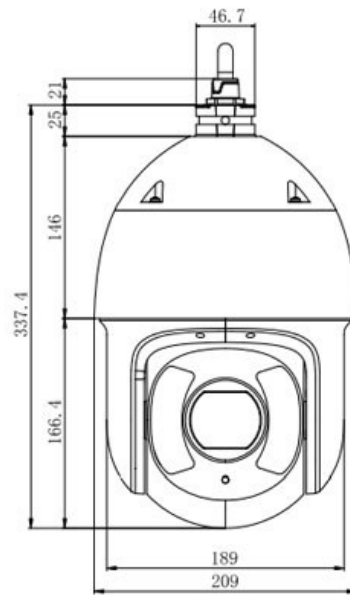

# CP- UNP-F2521L20-DAP

2MP 25x WDR IR Network PTZ Camera- 200 Mtr.



## Feature

Image Sensor  
 Effective Pixels  
 Video Output  
 S/N Ratio  
 Minimum Illumination  
 Focal Length  
 White Balance  
 Focus Control  
 Close Focus Distance  
 Angle of View  
 AGC control  
 Back Light Compensation  
 Optical Zoom  
 Digital Zoom  
 Pan Travel  
 Tilt Travel  
 Manual Speed  
 Presets  
 Preset Speed  
 Special Features  
 Privacy Masking  
 Power up Action  
 Idle Motion  
 Day/Night: IR Cut Filter  
 Video Compression  
 Video Streaming  
 Frame Rate  
 Audio Compression  
 Motion Detection  
 ROI  
 Audio Streaming

## Specification

1/2.8" PS CMOS  
 1920(H) x 1080(V), 2 Megapixels  
 1 Channel  
 More than 55dB  
 Color: 0.005Lux@F1.6; 0Lux@F1.6 (IR on)  
 4.8mm~120mm  
 Auto, ATW, Indoor, Outdoor, Manual  
 Auto / Manual  
 100mm~ 1000mm  
 H: 59.2° ~ 2.4°  
 Auto / Manual  
 BLC / HLC / WDR(120dB)  
 25x  
 16x  
 0°~360° endless, Pan Speed: 0.1° ~ 200°/sec  
 -20° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~120°/sec  
 Pan: 0.1° ~200° /s; Tilt: 0.1° ~120° /s  
 300  
 Pan: 300° /s; Tilt: 200° /s  
 IR Range upto 200m, Up to 300 Presets, 5 Pattern, 8 Tour, Auto Pan , Auto Scan  
 Up to 24 areas  
 Auto restore to previous PTZ and lens status after power failure  
 Activate Preset/ Scan/ Tour/ Pattern if there is no command in the specified period  
 Auto (ICR) / Color / B/W  
 H.265+/H.265/H.264+/H.264  
 Unicast / Multicast  
 Main stream: 1080P/720P/1.3M(1 ~ 50/60fps), Sub stream1: D1/CIF(1 ~ 25/30fps), Sub stream2: 1080P/1.3M/720P/D1/ CIF (1 ~ 25/30fps)  
 G.711a/G.711Mu/AAC/G.722 / G.726/G.729/ MPEG2-L2  
 Supports  
 Supports  
 1/1 channel In/Out



# CP- UNP-F2521L20-DAP

2MP 25x WDR IR Network PTZ Camera- 200 Mtr.



## Feature

Auto Tracking  
IVS  
Networking  
Protocols  
Alarm  
Max Remote Users  
Operating Temperature  
Smart Phone  
Memory Slot  
Weather Proof Standard  
Dimension  
Weight  
Power Source  
Power Consumption

## Specification

Supports  
Tripwire, Intrusion, Abandoned/Missing, Face Detection, Heat Map  
RJ-45 (10Base-T/100Base-TX), 1 RS485  
IPv4/IPv6, HTTP, HTTPS,SSL,TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour,802.1x, ONVIF, PSIA, CGI  
7/2 channel In/Out  
20 users  
-40°C ~ 70°C (-40°F ~ +158°F) / Less than 95% RH  
iPhone, iPad, Android Phone  
Micro SD card 128GB  
IP67 & IK10  
φ209mm x 337.4mm  
5.8kg  
AC24V/3A(±25%), PoE+(802.3at)  
17W, 26W(IR On, Heater On)

