
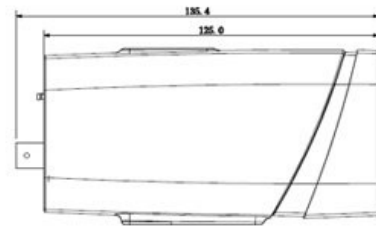


CP- UNC-BH31-VMD**3 MP WDR Box Camera****Main Features**

- 1/2.8" 3MP PS CMOS Image Sensor
- Max 25/30fps@3MP
- H.265/ H.264/ MJPEG dual-stream encoding
- WDR (upto 140dB), Day/Night (ICR), 3D-DNR, AWB, AGC, BLC
- C/CS Mount Lens, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-BH31-VMD

3 MP WDR Box Camera



Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Gain Control (AGC)
Lens
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Video Output
Resolution
Privacy Mask
ICR
ROI
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out
Bit Rate
Protocol
Smart Detection
Ethernet
User Account
Smart Phone
Micro SD

Specification

1/2.8" 3MP Progressive scan CMOS
0.005Lux/F1.2(Color), 0.0005Lux/F1.2(B/W)
2048(H) x 1536(V)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
Auto/Manual
C/CS Mount Lens
BLC/ HLC/ WDR(140dB)
H.265/H.264/MJPEG
More than 50dB
Main Stream:3M/1080P (1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 1080P/720P/D1(1 ~ 25/30fps)
1 channel BNC (1.0Vp-p,75Ω)
3M(2048x 1536)/1080P(1920x 1080) / 720P(1280x 720) /D1(704x 576) /CIF(352x 288)
Up to 4 areas
Auto (ICR)/Color/B/W
Up to 4 areas
1 Channel
G.711a / G.711u
1 Channel
2 Channel In
1 Channel Out
H.264: 40K ~ 10Mbps
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect, People counting, Heat map
RJ-45 (10/100/1000Base-T)
20 Users
iPhone, iPad, Android Phone
Max 128GB



CP- UNC-BH31-VMD

3 MP WDR Box Camera



Feature

Operating Temperature

Power Source

Power Consumption

Dimension

Weight

Specification

-30°C~+60°C , Less than 90%RH

DC12V(AC24V optional), PoE (802.3af)

Max 10W

71.4mm×65.5mm×135.4mm

0.58Kg