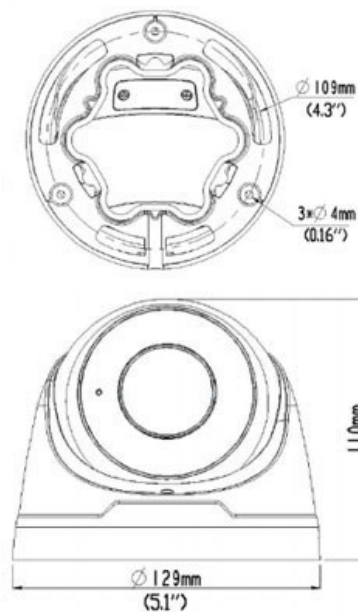


CP- VNC-D4KZR3C-MD-V2**8MP WDR Array Network Dome Camera - 30Mtr.****Main Features**

- 1/2" 8MP PS CMOS Image Sensor
- Max. 20fps@8MP (3840 x 2160)
- Ultra 265,H.265, H.264,MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, Digital Defog, 2D/3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized Lens
- IR Range of 30 Mtrs, Smart IR, Micro SD Card, IP67, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**InstaStream**

CP- VNC-D4KZR3C-MD-V2

8MP WDR Array Network Dome Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 DORI Distance
 Gain Control (AGC)
 BLC
 Video Compression
 Angle of View
 S/N Ratio
 Video Streaming
 Frame Rate
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Compression
 Audio
 Dewarping
 Protocol
 Network Storage
 Ethernet
 OSD
 IR
 Micro SD
 Operating Temperature

Specification

1/2" 8MP Progressive scan CMOS
 Colour: 0.001Lux (F1.5, AGC ON) 0Lux with IR
 Auto/Manual, 1~1/100000 s
 Auto/Manual
 2.8~12mm Motorized Lens
 2.8mm– 63 Detect (m) , 25.2 Observe (m), 12.6 Recognize (m), 6.3 Identify (m)
 12mm– 270 Detect (m) , 108 Observe (m), 54 Recognize (m), 27 Identify (m)
 Auto/Manual
 BLC/HLC/WDR(120dB)
 Ultra 265,H.265, H.264,MJPEG
 114.8° ~47.3° (H), 75.3° ~ 20.4° (V), 141.2° ~ 55.8° (O)
 >52dB
 Triple
 Main Stream: 8MP (3840x2160), Max 20fps; 5MP (2592x1944), Max 30fps; 5MP (2944x1656),
 Max 30fps; 4MP (2560x1440), Max 30fps; 2MP (1920x1080), Max 30fps;
 Sub Stream: 2MP (1920x1080), Max 30fps; Third Stream: D1 (720x576), Max 30fps
 Up to 4 areas
 Up to 8 areas
 IR-cut filter with auto switch (ICR)
 Up to 8areas
 G.711
 Built-in Mic
 Support
 IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP,
 UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, ONVIF (Profile S, Profile G, Profile T), API
 ANR, NAS(NFS)
 1 RJ45 10M/100M Base-TX Ethernet
 Up to 8 OSDs
 IR Range of 30 Mtr., Smart IR
 Micro SD, up to 256GB
 -40°C ~ 60°C (-40°F ~ 140°F)

 **CP- VNC-D4KZR3C-MD-V2****8MP WDR Array Network Dome Camera - 30Mtr.****Feature**

Humidity

Casing

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

≤95% RH (non-condensing)

Metal

12 V DC±25%, PoE (IEEE802.3 af)

Max.8.16W

IP67

Φ129mm x 110 mm

0.82kg