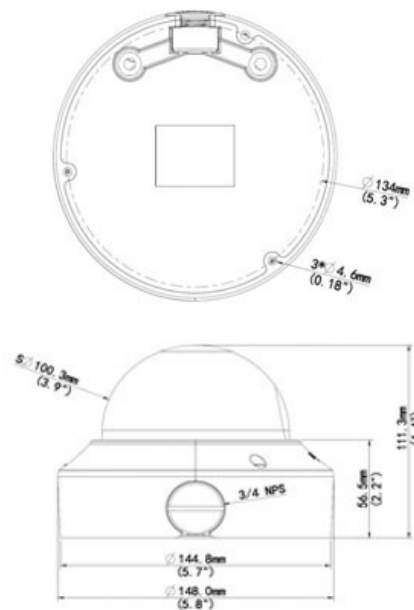


CP-VNC-V41ZR3-VMD**4 MP WDR Array Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.8" 4MP PS CMOS Image Sensor
- Max: 25fps@ 4MP(2560×1440), Max: 20fps@4MP(2592×1520)
- Ultra H.265, H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR, Corridor mode, ROI, AWB, AGC, BLC, HLC
- 2.8~12 mm Motorized Lens
- IR Range of 30 Mtrs, Micro SD Card, IP67, IK10, PoE
- Support Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**InstaStream**

CP- VNC-V41ZR3-VMD

4 MP WDR Array Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 Angle of View
 S/N Ratio
 Back Light Compensation
 Video Streaming
 Video Output
 Resolution
 Frame Rate
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Compression
 Audio Output
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Ethernet
 OSD
 IR

Specification

1/2.8" 4MP Progressive scan CMOS
 Colour: 0.001Lux (F1.4, AGC ON) 0Lux with IR
 Auto/Manual, 1 ~ 1/100000s
 Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
 2.8~12 mm Motorized Lens
 Auto/Manual
 Ultra H.265, H.265, H.264, MJPEG
 91.0° ~ 27°(H), 54.4° ~ 13.7°(V), 118.3° ~ 33.2°(O)
 >55dB
 BLC/ HLC/ WDR(120dB)
 Triple
 1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
 2592 × 1520
 Main Stream: 4MP (2560x1440), Max 25fps; 4MP (2592x1520), Max 20fps; 3MP (2048x1520), Max 30fps; Sub Stream: 2MP (1920x1080), Max 30fps; Third Stream: D1 (720x576), Max 30fps
 Up to 4 areas
 Up to 8 areas
 IR-cut filter with auto switch (ICR)
 Up to 8 areas
 impedance 35 kΩ; amplitude 2 V [p-p]
 G.711
 impedance 600 Ω; amplitude 2 V [p-p]
 1 IN
 1 Out
 128 Kbps~16 Mbps
 IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, ONVIF (Profile S, Profile G, Profile T), API
 1 RJ45 10M/100M Base-TX Ethernet
 Up to 8 OSDs
 Array Range of 30 Mtr., Smart IR

CP- VNC-V41ZR3-VMD**4 MP WDR Array Vandal Dome Camera - 30Mtr.****Feature**

Smart Detection

General Function

Special Features

Micro SD

Audio

Operating Temperature

ANR Technology

Humidity

Power Source

Power Consumption

Weatherproof Standard

Casing

Dimension

Weight

Specification

Intrusion, cross line, motion detection, Face detection, Audio detection, Defocus, Scene Change, Object Left, Object Moving , People counting

Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication

Digital De-Fog, Dewarping

Micro SD, up to 256GB

Two-way audio Supported

-40°C ~ +60°C (-40°F ~ 140°F)

Supports

≤ 95% RH (non-condensing)

DC 12V±25%, PoE (IEEE 802.3af)

Max 7.2W

IP67 & IK10

Shield: PC , Bottom plate: Metal

Φ148 x 111.3 mm (Ø5.8" x 4.4")

0.75 kg