


CP- VNC-V21ZR3-VMD**2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.****Main Features**

- 1/2.8" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- Ultra H.265, H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR, Digital Defog, Corridor Mode, ROI, AWB, AGC, BLC
- 2.8~12mm Motorized Lens
- IR Range of 30 Mtrs, Smart IR, Micro SD, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

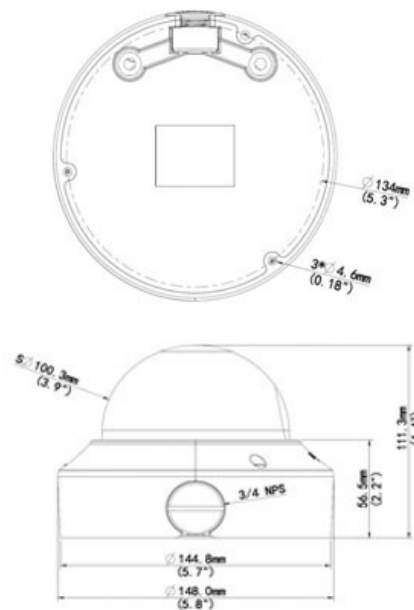

CP- VNC-V21ZR3-VMD

2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.

Feature

Image Sensor

Minimum Illumination

Shutter Speed

White Balance

Lens

DORI Distance

Angle of View

Gain Control (AGC)

Back Light Compensation

Video Compression

S/N Ratio

Video Streaming

Resolution

Video Output

Frame Rate

Privacy Mask

ICR

Motion Detection

ROI

Audio Input

Audio Compression

Audio Output

Alarm IN

Alarm Out

Audio

Protocol

Network Storage

Ethernet

OSD

Specification

1/2.8" 2MP Progressive scan CMOS

Colour: 0.002Lux (F1.6, AGC ON) 0Lux with IR

Auto/Manual, 1~1/100000 s

Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2

2.8~12mm Motorized Lens

2.8mm- 43.4 Detect (m) , 17.4 Observe (m), 8.7 Recognize (m), 4.3 Identify (m)

13.5mm- 186.2 Detect (m) , 74.5 Observe (m), 37.2 Recognize (m), 18.6 Identify (m)

H: 94.0° ~ 28° , V: 56.7° ~ 14.4° , O: 122.2° ~ 34.4°

Auto/Manual

BLC/HLC/ WDR(120db)

Ultra 265, H.265, H.264, MJPEG

>52dB

Triple

1920 x 1080

1 BNC, impedance 75 Ω; amplitude 1 V [p-p]

Main Stream: 2MP (1920x1080), Max 30fps; Sub Stream: 2MP (1920x1080), Max 30fps;

Third Stream: D1 (720x576), Max 30fps

Up to 8 areas

IR-cut filter with auto switch (ICR)

Up to 4 areas

Up to 8 areas

impedance 35 kΩ; amplitude 2 V [p-p]

G.711

impedance 600 Ω; amplitude 2 V [p-p]

1 channel

1 channel

Two-way audio Supported

IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP,

UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, ONVIF (Profile S, Profile G, Profile T), API

ANR, NAS(NFS)

1 RJ45 10M/100M Base-TX Ethernet

Up to 8 OSDs

CP- VNC-V21ZR3-VMD

2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.

Feature

IR
Micro SD
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Surge Protection
Casing
Reset Button
Dimension
Weight

Specification

IR Range of 30 Mtr. , Smart IR
Micro SD, up to 256GB
-40°C ~ 60°C (-40°F ~ 140°F)
≤ 95% RH (non-condensing)
DC 12V±25%, PoE (IEEE 802.3af)
Max 7.2W
IP67 & IK10
6KV
Metal + Plastic
Supported
Φ148 x 111.3 mm (Ø5.8" x 4.4")
0.92kg