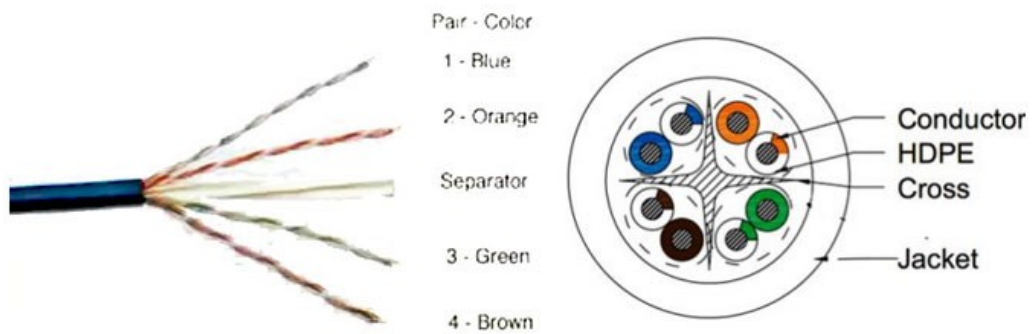


**CP- EUT-6TGL-305****CAT6, 4Pair 23AWG UTP Cable (Tangle Free)****Main Features**

- Exceed ISO/IEC 11801, IEC 61156-5, ANSI/TIA /EIA- 568-C.2 Class E Standards backward compatible to Cat5e Applications
- Excellent Margin with suppression of Cross Talk (NEXT)
- 4 Pair Separator Design
- 23 AWG cable
- Optionally Available in Low Smoke Zero Halogen and PE jacket and Armoured

# CP- EUT-6TGL-305

CAT6, 4Pair 23AWG UTP Cable (Tangle Free)

## Feature

Conduct Type  
Nominal Conductor Diameter  
Insulation  
No. of Pair  
Pairing  
Outer Sheath  
Colour of Sheath  
Approximate OD  
Rip Cord  
Cross Filler  
Sequential Marking  
Resistance Unbalance  
Conductor Resistance (DC) of solid cable  
Temperature Rating  
Packing  
Installation Temperature  
Mutual Capacitance  
Storage Temperature  
NVP  
Impedance  
Tensile  
Min Bending Radius

## Specification

Solid Bare Electrolytic Grade Copper  
23 AWG  
Polyethylene (HDPE)  
4, Each pair Twisted  
Twisted into Two core  
PVC Sheath/ LSZH  
Grey (RAL-7035), Option Available  
5.80mm  
Yes  
HDPE  
Every Meter  
5% Max  
93.5Ω/1000mtr @20°C Max  
-20 to +60°C  
305 Mtrs  
0 to 50°C  
5.6nf/100Mtr. Max  
-20 to +75°C  
69%  
100±15% Ω  
110N  
10x Jacket Dia