


**CP- GPC-D24L2-S****2.4 MP Full HD IR Guard+ Dome Camera– 20 Mtr.****Main Features**

- 1/2.9" 2.4MP PS CMOS Image Sensor
- 25/30fps@2.4MP
- DWDR, Day/Night (ICR), 2D/3D-DNR, AWB, AGC, BLC
- 3.6mm(6mm optional)
- Support low illumination, warm light day night full color
- IR Range of 20 Mtr., IP66

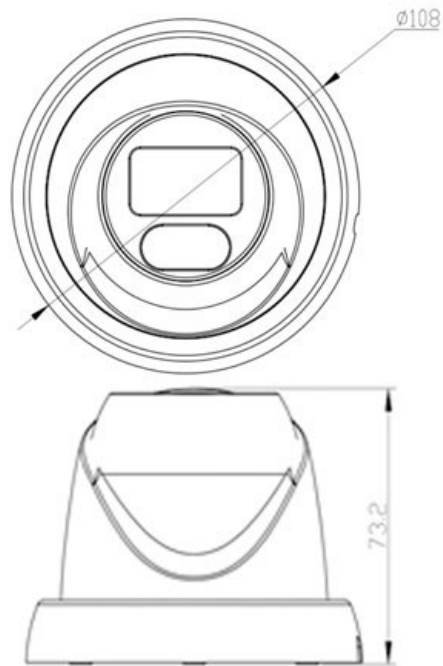

**CP- GPC-D24L2-S****2.4 MP Full HD IR Guard+ Dome Camera– 20 Mtr.****Feature**

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Gain Control (AGC)  
Lens  
Back Light Compensation  
S/N Ratio  
Video Output  
Resolution  
ICR  
Frame Rate  
IR  
IR LEDs  
Smart LED  
Image set  
Operating Temperature  
Operating Humidity  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

**Specification**

1/2.9" 2.4MP Progressive Scan CMOS  
Color: 0.1 lux @ (F2.1, AGC ON), 0 lux with IR  
PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s  
ATW / MWB  
Auto  
3.6mm (6mm optional)  
Support  
>52dB (AGC off)  
1HD TVI/AHD/CVI/CVBS output  
2.4MP  
Support ICR EXT/Auto / Color/ BW (Black and White)  
2.4MP@25fps, 2.4MP@30fps  
IR Range of 20 Mtr.  
2 PCS 3600K soft warm light  
Support Auto/Manual model, brightness can adjustable  
Contrast, sharpness, saturate, 3DNR, 2DNR, DWDR  
-20°C~ 55°C  
(-20° C to 60° C), Humidity 90% or less (non-condensing)  
DC12V(+/-10%)  
Max. 5W (Max. 5W with IR cut filter on)  
IP66  
73.2mm x 73.2mm x 108mm  
0.22Kg.