


CP- GPC-D50L2-S**5MP Full HD IR Guard+ Dome Camera - 20Mtr.****Main Features**

- 1/2.7" 5MP PS CMOS Image Sensor
- Max 25/30fps@5MP
- Day/Night (ICR), 2D/3D-DNR, AWB, AGC, BLC
- 3.6mm lens (6mm Optional)
- IR Range of 20 Mtrs, IP66
- Support Starlight Function
- Support low illumination, warm light day night full color

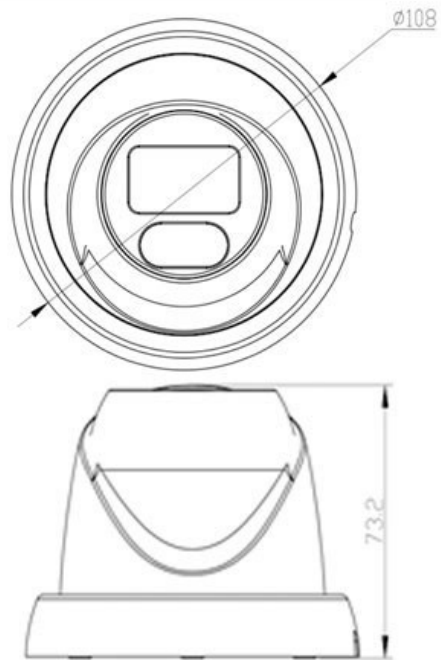

CP- GPC-D50L2-S

5MP Full HD IR Guard+ Dome Camera - 20Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control (AGC)
Lens
S/N Ratio
Back Light Compensation
Video Streaming
Video Output
Resolution
ICR
LED light
IR
No. of IR LEDs
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension

Specification

1/2.7" 5MP PS CMOS
0.01 lux @ (F1.6, AGC ON)
PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
ATW / MWB
Auto
3.6mm Lens (6mm Optional)
>52dB (AGC off)
BLC/ HLC
25/30fps@5MP
TVI/AHD/CVI/CVBS,CVI default setting
5MP
Support ICR EXT/Auto / Color/ BW
Support Auto/Manual Model
IR Range of 20 Mtr.
2 Pcs 3500K soft warm light
-20° C to 60° C
90% or less (non-condensing)
12V DC ±10%
Max. 3W (Max. 3W with LED ON)
IP66
73.2mmx108mm