
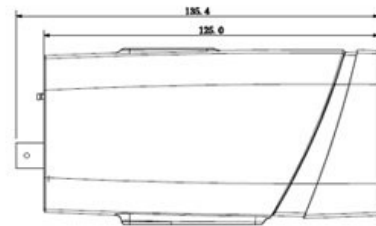


**CP- UNC-BH31-VMD****3 MP WDR Box Camera****Main Features**

- 1/2.8" 3MP PS CMOS Image Sensor
- Max 25/30fps@3MP
- H.265/ H.264/ MJPEG dual-stream encoding
- WDR (upto 140dB), Day/Night (ICR), 3D-DNR, AWB, AGC, BLC
- C/CS Mount Lens, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP- UNC-BH31-VMD

## 3 MP WDR Box Camera



### Feature

Image Sensor  
 Effective Pixels  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Gain Control (AGC)  
 Lens  
 Video Compression  
 Back Light Compensation  
 S/N Ratio  
 Video Streaming  
 Resolution  
 Video Output  
 Motion Detection  
 Privacy Mask  
 ICR  
 ROI  
 Audio Input  
 Audio Compression  
 Audio Output  
 Alarm IN  
 Alarm Out  
 Bit Rate  
 Protocol  
 Smart Detection  
 Ethernet  
 User Account  
 Smart Phone  
 Micro SD

### Specification

1/2.8" 3MP Progressive scan CMOS  
 2048(H) x 1536(V)  
 0.005Lux/F1.2(Color), 0.0005Lux/F1.2(B/W)  
 Auto/Manual, 1/3(4)~1/100000s  
 Auto/Manual  
 Auto/Manual  
 C/CS Mount Lens  
 H.265/H.264/MJPEG  
 BLC/ HLC/ WDR(140dB)  
 More than 50dB  
 Main Stream:3MP/1080P (1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 1080P/720P/D1(1 ~ 25/30fps)  
 3MP(2048x 1536)/1080P(1920x 1080) / 720P(1280x 720) /D1(704x 576) /CIF(352x 288)  
 1 channel BNC (1.0Vp-p,75Ω)  
 Supports  
 Up to 4 areas  
 Auto (ICR)/Color/B/W  
 Up to 4 areas  
 1 Channel  
 G.711a / G.711u  
 1 Channel  
 2 Channel In  
 1 Channel Out  
 H.264: 40K ~ 10Mbps  
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI  
 Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect, People counting, Heat map  
 RJ-45 (10/100/1000Base-T)  
 20 Users  
 iPhone, iPad, Android Phone  
 Max 128GB



# CP- UNC-BH31-VMD

3 MP WDR Box Camera



## Feature

Operating Temperature

Power Source

Power Consumption

Dimension

Weight

## Specification

-30°C~+60°C , Less than 90%RH

DC12V(AC24V optional), PoE (802.3af)

Max 10W

71.4mm×65.5mm×135.4mm

0.58Kg