CP PLUS

CP- UNC-DS25ML3

2 MP Full HD IR Dome Camera - 30Mtr.

ORANGE

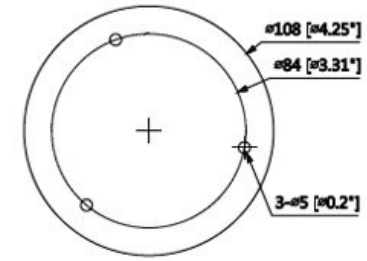

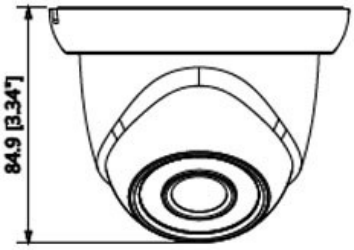

Main Features

- 1/2.7" 2MP PS CMOS Image Sensor
- 25/30fps@1080P(1920×1080)
- H.265+/H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8 mm fixed lens (3.6 mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

CE FC RoHS COMPLIANT

*Product casing and specifications are subject to change without prior notice

CP PLUS

CP- UNC-DS25ML3

2 MP Full HD IR Dome Camera - 30Mtr.

ORANGE

Feature	Specification
Image Sensor	1/2.7" 2MP PS CMOS Image Sensor
Effective Pixels	1920(H)x1080(V)
Minimum Illumination	0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Lens	2.8mm fixed lens (3.6mm optional)
Gain Control (AGC)	Auto/Manual
Angle of View	H:115°/87.5°, V:60°/47°
Video Compression	H.265+/H.265/H.264+/H.264H/MJPEG (Sub Stream)
S/N Ratio	More than 50dB
Back Light Compensation	BLC/ HLC/ DWDR
Resolution	1080P(1920×1080)/1.3MP(1280×960)/ 720P(1280×720)/D1(704×576/704×480)/ CIF (352×288/352×240)
Frame Rate	Main Stream: 1080P (1 ~ 25/30fps) ,Sub Stream: D1(1 ~ 25/30fps)
Digital Zoom	16x
Motion detection	Off / On (4 Zone, Rectangle)
Privacy Mask	Off / On (4 Area, Rectangle)
ICR	Auto (ICR)/Color/B/W
ROI	Off / On (4 Zone)
Bit Rate	H265:12K~6400K, H.264:32K ~8192K
Protocol	HTTP; TCP; ARP; RTSP; RTP; RTCP; UDP; DHCP; DNS; IPV4;NTP; Multicast; ICMP; TLS, ONVIF Profile S&G
Ethernet	RJ-45 (10/100Base-T)
User Account	20 Users
IR	IR Range of 30 Mtr.
Smart Phone	iPhone, iPad, Android Phone
Operating Temperature	-30°C~+60°C , Less than 95%RH
Power Source	DC12V, PoE (802.3af)
Power Consumption	<4.8W
Weatherproof Standard	IP67
Dimension	Φ109mm×85.5mm(4.29"x3.36")
Weight	0.24Kg

CE FC RoHS COMPLIANT

*Product casing and specifications are subject to change without prior notice