
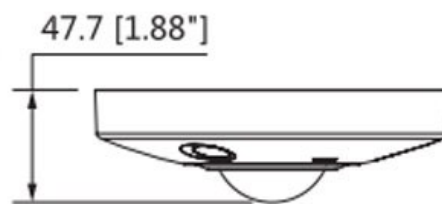


CP- UNC-EH4K121L1-VM**12MP Panoramic Network IR Fisheye camera - 10Mtr.****Main Features**

- 1/1.7" 12 MP PS CMOS Image Sensor
- H.265/H.264 triple-stream encoding
- Max 25fps@12MP (4000x3000)
- DWDR, Day/Night (ICR), Defog, 3D-DNR, ROI, AWB, AGC, BLC, HLC
- Multiple dewarped Mode
- IR Range of 10 Mtr.
- Supports PoE, Micro SD Card, IP67, IK10
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

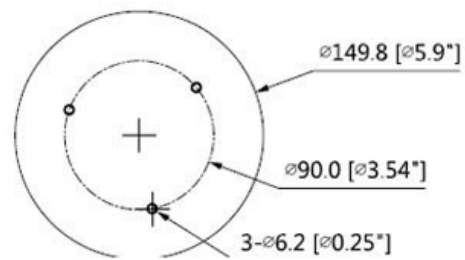

CP- UNC-EH4K121L1-VM

12MP Panoramic Network IR Fisheye camera - 10Mtr.



Feature	Specification
Image Sensor	1/1.7" 12MP PS CMOS
Minimum Illumination	0.001Lux/F2.8(Color,1/3s,30IRE), 0.01Lux/F2.8(Color,1/30s,30IRE), 0Lux/F2.8(IR on)
Effective Pixels	4000(H) x 3000(V)
Shutter Speed	Auto/Manual, 1/3~1/100000s
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Lens	1.98mm
Gain Control (AGC)	Auto/Manual
Angle of View	H: 180°, V:180°
Back Light Compensation	BLC/ HLC/ DWDR
Video Compression	H.265/H.264
S/N Ratio	More than 50 dB
Video Streaming	Main Stream: 12MP(1~25fps)/ 8MP(1~25/30fps), Sub Stream: D1(1 ~ 25/30fps), Third Stream: 1.3MP(1 ~ 25/30fps)
Resolution	12M(4000x3000)/ 8M(2880x2880)/ 6M(2880x2160)/ 3M(2048x1536)/ 1.3M(1280x960)/ D1 (704x576/704x480)/ CIF(352x288/352x240)
Digital Zoom	16x
Motion detection	Off / On (4 Zone, Rectangle)
Privacy Mask	Off / On (4 Area, Rectangle)
ICR	Auto (ICR)/Color/B/W
ROI	Off / On (4 Zone)
Audio Input	1 Ch.
Audio Output	1 Ch.
Audio Compression	G.711a/G.711Mu/AAC/ G.726
Alarm IN	2 channel In: 5mA 5VDC
Alarm Out	2 channel Out: 1A 30VDC / 0.5A 50VAC
Bit Rate	H.265: 3Kbps~ 9984Kbps, H.264: 8Kbps~ 16384Kbps
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP;UDP;SMTP;FTP;DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP;SNMP; ONVIF, PSIA, CGI
Smart Detection	Tripwire, Intrusion, Heat Map
Ethernet	RJ-45 (100/1000Base-T)
IR	10Mtr.
Smart Phone	iPhone, iPad, Android Phone



CP- UNC-EH4K121L1-VM**12MP Panoramic Network IR Fisheye camera - 10Mtr.****Feature**

Micro SD
Audio
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

Micro SD card 128GB
1 Built-in Mic
-30°C~+60°C, Less than 95%RH
DC12V, PoE(802.3af)
<12W
IP67, IK10
Φ149.8mm×47.7mm
0.58kg