


CP-UNC-T26-D**2 MP Full HD WDR Network IR Bullet Camera - 60 Mtr.****Main Features**

- 1/2.8" 2MP PS CMOS Image Sensor
- H.265 , H.264 triple-stream encoding
- Max. 50/60fps@1080P (1920×1080)
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
- IR Range of 60 Mtrs.
- 3.6mm fixed lens (6mm optional)
- 1/1 Alarm in/out, 1/1 audio in/out
- Micro SD Card, IP67, IK10, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

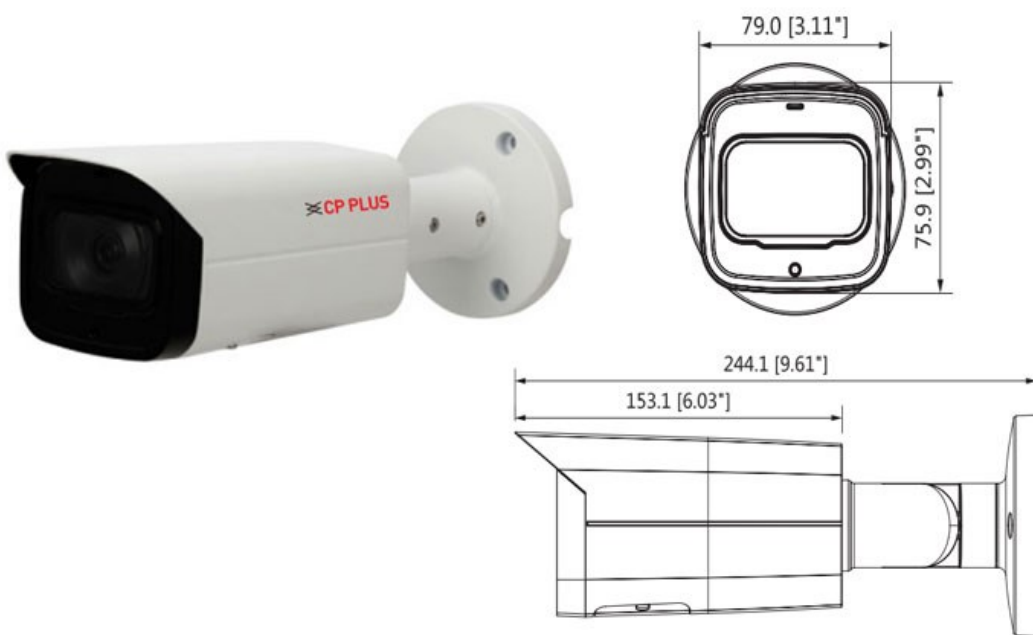

CP-UNC-T26-D

2 MP Full HD WDR Network IR Bullet Camera - 60 Mtr.



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Angle of View
 Video Compression
 S/N Ratio
 Back Light Compensation
 Video Streaming
 Resolution
 Digital Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR

Specification

1/2.8" 2 Megapixel CMOS
 1920(H) x 1080(V)
 0.009Lux/F1.6(Color,1/3s,30IRE) 0.07Lux/F1.6(Color,1/30s,30IRE) 0Lux/F1.6(IR on)
 Auto/Manual, 1/3~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 3.6mm (6mm optional)
 Auto/Manual
 H: 87° (52°), V: 46° (30°)
 H.265+/H.265/H.264+/H.264
 More than 50 dB
 BLC / HLC / WDR(120dB)
 Main Stream: 1080P(1~50/60fps) , Sub Stream: D1(1~50/60fps) , Third Stream: 1080P(1~25/30fps)
 1080P(1920x1080)/1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)/ VGA(640x480)/CIF(352x288/352x240)
 16x
 Off / On (4 Zone, Rectangle)
 Off / On (4 Area, Rectangle)
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 1 Ch.
 1 Ch.
 G.711a/ G.711Mu/ AAC/ G.726
 1 channel In: 5mA 5VDC
 1 channel Out: 300mA 12VDC
 H.264: 24K ~ 10240Kbps H.265: 14K ~ 9984Kbps
 HTTP; HTTPs; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP; ONVIF; PSIA; CGI
 Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
 RJ-45 (10/100Base-T)
 20 users
 IR Range of 60 Mtr.



CP- UNC-T26-D**2 MP Full HD WDR Network IR Bullet Camera - 60 Mtr.****Feature**

Smart Phone
Micro SD
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

iPhone, iPad, Android Phone
Micro SD, Max 128GB
-30° C ~ +60° C (-22° F ~ +140° F)
Less than 95% RH
DC12V, ePoE
<11W
IP67 & IK10
244.1mm×79mm×75.9mm
0.815kg