


**CP- UNC-TA81L5-DS****8MP Full HD WDR IR Network Bullet Camera - 50 Mtr.****Main Features**

- 1/2" 8MP PS CMOS Image Sensor
- 25/30fps@8MP(3840×2160)
- H.265 and H.264 dual-stream encoding
- Support Starlight Function
- WDR (120dB), Day/Night (ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm fixed lens (4mm, 6mm optional)
- IR Range of 50 Mtrs, Smart IR, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

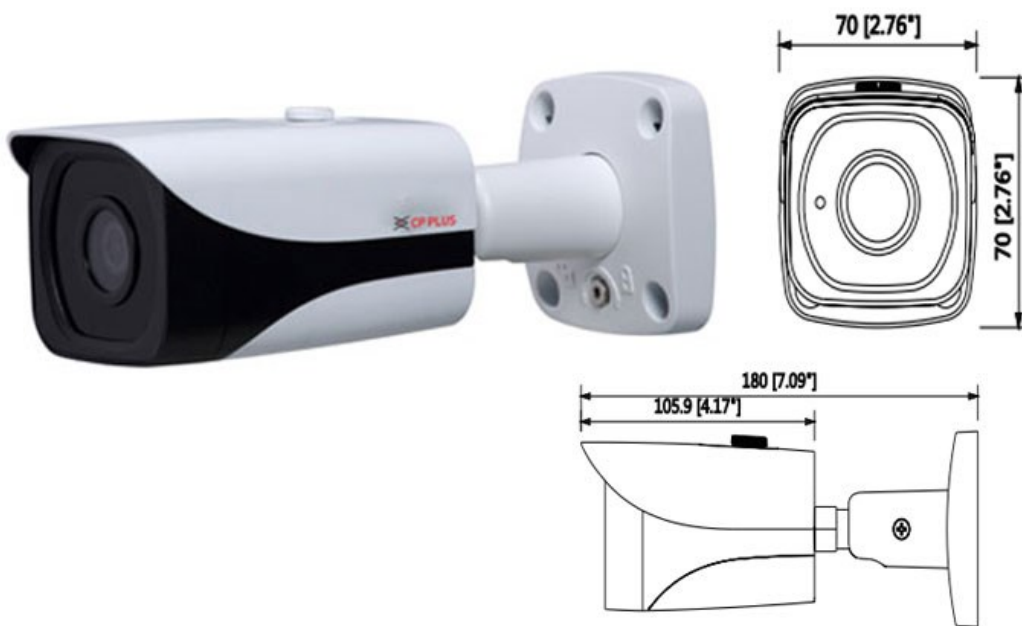

# CP- UNC-TA81L5-DS

## 8MP Full HD WDR IR Network Bullet Camera - 50 Mtr.



### Feature

Image Sensor  
 Minimum Illumination  
 Effective Pixels  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 Angle of View  
 S/N Ratio  
 Back Light Compensation  
  
 Resolution  
  
 Frame Rate  
 Digital Zoom  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Bit Rate  
  
 Protocol  
  
 Smart Detection  
 Ethernet  
  
 Event Trigger  
  
 User Account  
 Smart Phone  
 IR  
 Operating Temperature

### Specification

1/2" 8Megapixel progressive scan CMOS  
 0.003Lux/F1.6( Color,1/3s,30IRE) 0.08Lux/F1.6( Color,1/30s,30IRE) 0Lux/F1.6(IR on)  
 3840(H) x 2160(V)  
 Auto/Manual, 1/3(4)~1/100000s  
 Auto/Natural/Street Lamp/Outdoor/Manual  
 2.8mm (4mm, 6mm optional)  
 Auto/Manual  
 Support H.265+/H.264+/H.265/H.264H/MJPEG (Sub Stream)  
 H: 131° (102°, 64°), V: 111° (87°, 55°)  
 More than 50dB  
 BLC / HLC / WDR(120dB)  
 4K(3840x2160)/6M(3072x2048)/5M(2560x1920)/ 3M(2048x1536)/3M(2304x1296)/ 1080P  
 (1920x1080)/1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480) /VGA(640x480)/CIF  
 (352x288/352x240)  
 Main Stream: 4K (1~25/30fps) Sub Stream: D1(1~25/30fps)  
 16x  
 Off / On (4 Zone, Rectangle)  
 Off / On (4 Area, Rectangle)  
 Auto (ICR)/Color/B/W  
 Off / On (4 Zone)  
 H.264:24K ~ 8192Kbps, H.265:32K~ 8192Kbps  
 HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP;FTP; DHCP; DNS;DDNS; PPPOE; IPV4/V6; QoS;  
 UPNP; NTP; Bonjour; IEEE 802.1X;Multicast; ICMP; IGMP; TLS; NFS;SSH, ONVIF Profile S&G, API  
 Tripwire, Intrusion  
 RJ-45 (10/100Base-T)  
 Motion detection, Video tampering, Scene changing, Network disconnection, IP address  
 conflict, Illegal access, Storage anomaly  
 20 Users  
 iPhone, iPad, Android  
 IR Range of 50 Mtr., Smart IR  
 -30°C~+60°C, Less than 95% RH



**CP- UNC-TA81L5-DS****8MP Full HD WDR IR Network Bullet Camera - 50 Mtr.****Feature**

Power Source

Power Consumption

Weatherproof Standard

Casing

Dimension

Weight

**Specification**

DC12V, PoE (IEEE802.3af)

&lt;7.8W

IP67

Metal

180mm×70mm×70mm (7.09"×2.76"×2.76")

0.48kg