


CP- UNC-TB21ZL6S-VMD**2MP Full HD WDR IR Network Bullet Camera - 60Mtr.****Main Features**

- 1/2.8" 2MP Progressive Scan CMOS
- Max. 25/30fps@2MP (1920×1080)
- Supports Starlight Function
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.7~13.5mm Motorized Lens
- IR Range of 60 Mtrs, IP67, IK10, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

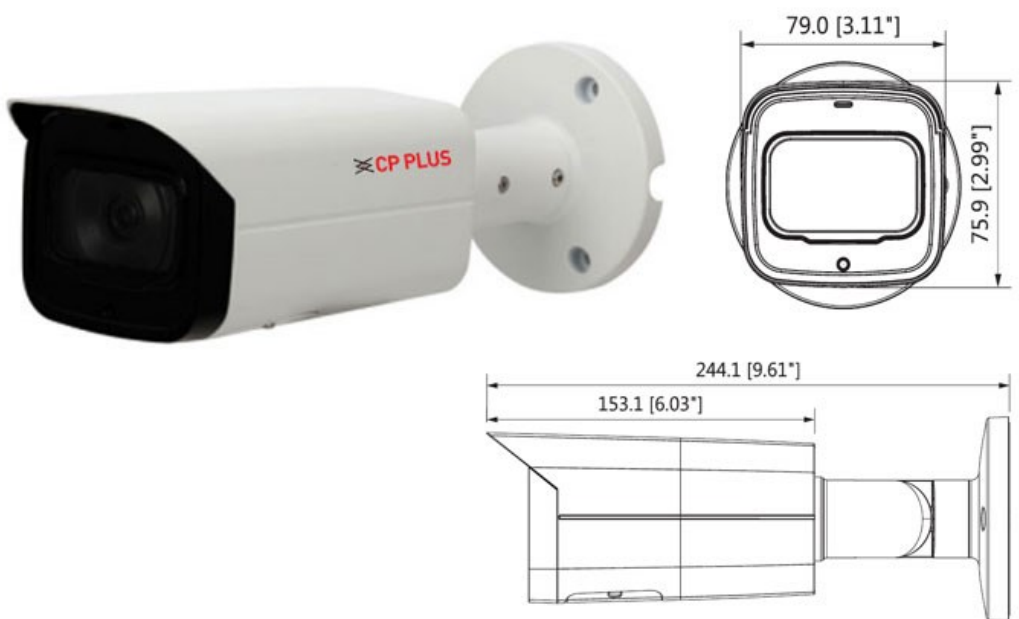

CP- UNC-TB21ZL6S-VMD**2MP Full HD WDR IR Network Bullet Camera - 60Mtr.****Feature**

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Back Light Compensation
Angle of View
Video Compression
S/N Ratio
Video Streaming
Resolution
Digital Zoom
Motion detection
Privacy Mask
ICR
ROI
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out
Bit Rate
Protocol
Smart Detection
Ethernet
User Account
IR
Smart Phone

Specification

1/2.8" 2MP PS CMOS
1920(H)x1080(V)
0.006Lux/F1.4(Color,1/3s,30IRE) 0.05Lux/F1.4(Color,1/30s,30IRE) 0Lux/F1.4(IR on)
Auto/Manual, 1/3~1/100000s
Auto/Natural/Street Lamp/Outdoor/Manual
2.7mm~13.5mm Motorized Lens
Auto/Manual
BLC / HLC / WDR(120dB)
H:106°~29°, V:57°~17°
H.265+/H.265/H.264+/H.264/MJPEG
More than 50dB
1080P (1 ~ 25/30fps) , D1/CIF(1 ~ 25/30fps) , D1/CIF(1 ~ 25/30fps)
1080P(1920x1080)/SXGA(1280x1024)/1.3M(1280x 960)/720P(1280x720)/D1
(704x576/704x480)/ VGA(640x480)/ CIF(352x288/352x240)
16x
Off / On (4 Zone, Rectangle)
Off / On (4 Area, Rectangle)
Auto (ICR)/Color/B/W
Off / On (4 Zone)
1 channel In
1 channel Out
G.711A;G.711Mu;G.726;AAC
1 channel In: 5mA 5VDC
1 channel Out: 300mA 12VDC
H.265: 12K ~ 6400Kbps , H.264: 32K ~ 10240Kbps
HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; RTCP;SMTP; FTP; DHCP; DNS; DDNS; PPPOE; ICMP;
IGMP; 802.1x; IPv4/v6; SNMP; QoS; UPnP; NTP; ONVIF (Profile S & G), PSIA, CGI
Tripwire, Intrusion, Video Tampering
RJ-45 (10/100Base-T)
20 Users
IR Range of 60 Mtr., Smart IR
iPhone, iPad, Android Phone

CP- UNC-TB21ZL6S-VMD**2MP Full HD WDR IR Network Bullet Camera - 60Mtr.****Feature**

Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Casing
Dimension
Weight

Specification

Micro SD , Max 128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<12.6W
IP67, IK10
Metal
244.1mm×79mm×75.9mm (9.61"×3.11"×2.99")
0.815kg