


CP- UNC-VA30L3S-VM**3 MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max. 25fps@3MP (2048x1536)
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
- 2.8 mm fixed lens (3.6mm optional)
- IR Range of 30 Mtrs, IP67, IK10,SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

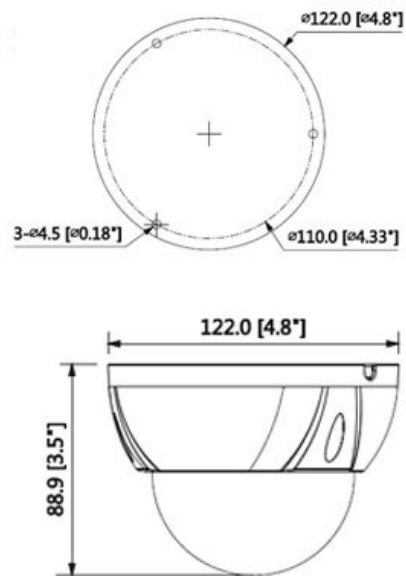

CP- UNC-VA30L3S-VM

3 MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Specification

Image Sensor	1/3" 3MP PS CMOS Image Sensor
Effective Pixels	2048(H) x 1536(V)
Minimum Illumination	1.1Lux/F2.1(Color), 0.25Lux/F2.1(Black&White), 0Lux/F2.1(IR on)
Shutter Speed	Auto/Manual, 1/3~1/100000s
White Balance	Auto/Manual
Lens	2.8 mm (3.6 mm optional)
Gain Control (AGC)	Auto/Manual
Angle of View	2.8mm - 88°(H) 66°(V) 110°(D) , 3.6mm - 68.5°(H) 50°(V) 85.5°(D)
Video Compression	H.264; H.264H; H.264B; MJPEG
S/N Ratio	More than 50dB
Back Light Compensation	BLC/ HLC/ DWDR
Resolution	3MP(2048 x 1536)1080P(1920 x 1080)/720P(1280 x 720)/D1(704 x 576/704 x 480)/CIF(352 x 288/352 x 240)
Frame Rate	Main Stream: 3MP(1 ~ 25fps) , Sub Stream: D1(1 ~ 25/30fps)
Motion detection	Supports
Privacy Mask	Up to 4 areas
ICR	Auto (ICR)/Color/B/W
Audio Input	1 Ch.
Audio Output	1 Ch.
Audio Compression	G.711A\G.711Mu
Alarm IN	2 Ch.
Alarm Out	2 Ch.
Bit Rate	H.264: 5k~8Mbps
Protocol	HTTP; TCP; ARP; RTSP; RTP;UDP;SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ONVIF; CGI
Ethernet	RJ-45 (10/100Base-T)
User Account	20 Users
Smart Phone	iPhone, iPad, Android Phone
IR	IR Range of 30 Mtr.
Operating Temperature	-30°C~+60°C , Less than 95%RH
Power Source	DC12V (±25%), PoE (802.3af)
Power Consumption	<4.9W(IR on)



 **CP- UNC-VA30L3S-VM****3 MP Full HD IR Vandal Dome Camera - 30Mtr.****Feature**

Weatherproof Standard

Dimension

Weight

Specification

IP67 & IK10

φ122mm × 89mm

0.4kg