


CP- UNC-VB21ZL3S-VMD**2 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- H.265+ and H.264+ triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
- 2.7~13.5mm Motorized lens
- IR Range of 30 Mtrs, Smart IR, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

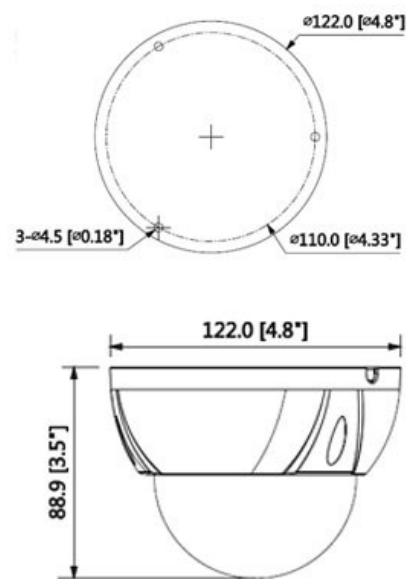

CP- UNC-VB21ZL3S-VMD

2 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature	Specification
Image Sensor	1/2.8" 2MP Progressive scan CMOS
Effective Pixels	1920(H) x 1080(V)
Minimum Illumination	0.006Lux/F1.4 0.005Lux/F1.2(Color,1/3s,30IRE) 0.05Lux/F1.4 0.04Lux/F1.2 (Color,1/30s,30IRE) 0Lux/F1.4(IR on, B/W)
Shutter Speed	Auto/Manual, 1/3~1/100000s
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Lens	2.7mm~13.5mm motorized Lens
Gain Control (AGC)	Auto/Manual
Angle of View	H:106°~29°, V:57°~17°
Video Compression	H.265+/H.265/H.264+/H.264H/MJPEG (Sub Stream)
Back Light Compensation	BLC / HLC / WDR(120dB)
S/N Ratio	More than 50dB
Video Streaming	1080P (1 ~ 25/30fps) , D1/CIF(1 ~ 25/30fps) , D1/CIF(1 ~ 25/30fps)
Resolution	1080P(1920x1080)/SXGA(1280x1024)/1.3M(1280x 960)/720P(1280x720)/D1 (704x576/704x480)/VGA(640x480)/CIF(352x288/352x240)
Digital Zoom	16x
Motion detection	Off / On (4 Zone, Rectangle)
Privacy Mask	Off / On (4 Area, Rectangle)
ICR	Auto (ICR)/Color/B/W
ROI	Off / On (4 Zone)
Audio Input	1Ch.
Audio Output	1Ch.
Audio Compression	G.711A;G.711Mu;G.726;AAC
Alarm IN	1 channel In: 5mA 5VDC
Alarm Out	1 channel Out: 300mA 12VDC
Bit Rate	H.265: 12K ~ 6400Kbps , H.264: 32K ~ 10240Kbps
Protocol	HTTP; HTTPs; TCP; ARP; RTSP; RTP; RTCP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; Bonjour; IEEE 802.1x; Multicast; ICMP; IGMP; ONVIF Profile S&G, API ,TLS
Smart Detection	Tripwire, Intrusion
Event Trigger	Motion detection, Video tampering, Scene changing, Network disconnection, IP address conflict, Illegal access, Storage anomaly
Ethernet	RJ-45 (10/100Base-T)



CP- UNC-VB21ZL3S-VMD**2 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Feature**

User Account
Smart Phone
IR
Micro SD
Operating Temperature
Power Source
Power Consumption
Casing
Weatherproof Standard
Dimension
Weight

Specification

20 Users
iPhone, iPad, Android Phone
IR Range of 30 Mtr. ,Smart IR
Micro SD Card128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<9W
Metal
IP67 & IK10
φ122mm x 88.9mm
0.4Kg