


CP- UNC-VB41ZL3-VMD**4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4MP and 25/30fps@3MP
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.7~13.5mm motorized lens
- IR Range of 30 Mtrs, IP67, IK10, PoE, SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

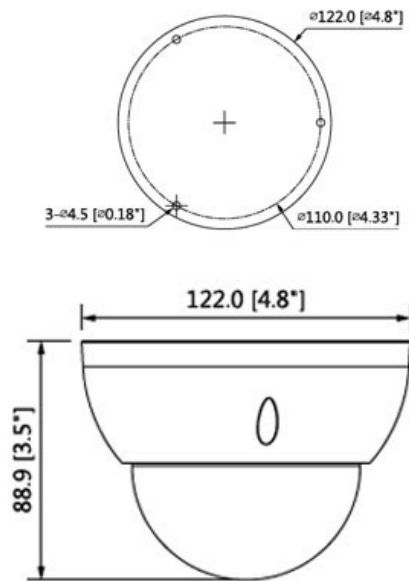

CP- UNC-VB41ZL3-VMD

4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Back Light Compensation
 Angle of View
 Video Compression
 S/N Ratio
 Video Streaming
 Resolution
 Digital Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR

Specification

1/3" 4Megapixel progressive scan CMOS
 2688(H) x 1520(V)
 0.03Lux/F1.4(Color,1/3s,30IRE) 0.3Lux/F1.4(Color,1/30s,30IRE) 0Lux/F1.4(IR on)
 Auto/Manual, 1/3~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 2.7mm~13.5mm
 Auto/Manual
 BLC / HLC / WDR(120dB)
 H:104°~28°, V:55°~16°
 H.265+/H.265/H.264+/H.264
 More than 50dB
 4M (1 ~ 20fps)/3M(1 ~ 25/30fps), D1/CIF(1 ~ 20fps), 720P(1 ~ 15fps)
 (2688x1520)/(2560x1440)/(2304x1296)/1080P(1920x1080)/SXGA(1280x1024)/1.3M(1280x960)/720P(1280x720)/D1(704x576/704x480)/VGA(640x480)/CIF(352x288/352x240)
 16x
 Off / On (4 Zone, Rectangle)
 Off / On (4 Area, Rectangle)
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 1 channel
 1 channel
 G.711A/G.711Mu/G.726/AAC
 1 channel In: 5mA 5VDC
 1 channel Out: 300mA 12VDC
 H.265: 12K ~ 8448Kbps , H.264: 32K ~ 10240Kbps
 HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; SNMP; QoS; UPnP; NTP; ONVIF, PSIA, CGI
 Tripwire, Intrusion
 RJ-45 (10/100Base-T)
 20 Users
 IR Range of 30 Mtr.



CP- UNC-VB41ZL3-VMD**4MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Feature**

Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Casing
Dimension
Weight

Specification

iPhone, iPad, Android Phone
SD Card, Max 128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<8.5W
IP67 & IK10
Metal
φ122mm x 88.9mm
0.4 Kg