


CP- UNC-VB81ZL3-VMDS**8MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2" 8MP PS CMOS Image Sensor
- 25/30fps@8MP(3840×2160)
- Support Starlight Function
- H.265 and H.264 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.7~11 mm Motorized lens
- IR Range of 30 Mtrs, IP67, IK10, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

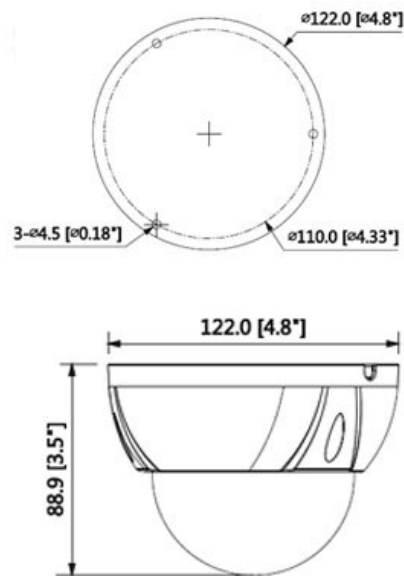

CP- UNC-VB81ZL3-VMDS

8MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
 Minimum Illumination
 Effective Pixels
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 Angle of View
 Back Light Compensation
 S/N Ratio
 Video Streaming
 Resolution
 Digital Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Smart Detection
 Ethernet

Specification

1/2" 8MP Progressive scan CMOS
 0.004Lux/F1.9(Color,1/3s,30IRE) 0.09Lux/F1.9 Color,1/30s,30IRE) 0Lux/F1.9(IR on)
 3840(H) x 2160(V)
 Auto/Manual, 1/3~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 3.7mm~11mm motorized Lens
 Auto/Manual
 H.265+/H.265/H.264+/H.264H/MJPEG (Sub Stream)
 H:112°~46°, V:60°~26°
 BLC / HLC / WDR(120dB)
 More than 50dB
 Main Stream: 4K (1~25/30fps) Sub Stream: D1(1~25/30fps)
 4K(3840x2160)/6M(3072x2048)/5M(2560x1920)/ 3M(2048x1536)/3M(2304x1296)/ 1080P
 (1920x1080)/1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480) /VGA(640x480)/CIF
 (352x288/352x240)
 16x
 Off / On (4 Zone, Rectangle)
 Off / On (4 Area, Rectangle)
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 1 Ch.
 1 Ch.
 G.711A/G.711Mu/G.726/AAC
 1 channel In: 5mA 5VDC
 1 channel Out: 300mA 12VDC
 H.264:32Kbps~8192Kbps, H.265: 16Kbps~8192Kbps
 HTTP/HTTPS; TCP; ARP; RTSP; RTP; RTCP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPV4/V6;
 QoS; UPnP; NTP; Bonjour; IEEE 802.1X; Multicast; ICMP; IGMP; TLS; SSH; NFS; ONVIF Profile
 S&G, API
 Tripwire, Intrusion
 RJ-45 (10/100Base-T)



CP- UNC-VB81ZL3-VMDS**8MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Feature**

Event Trigger

User Account

Smart Phone

IR

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Casing

Dimension

Weight

Specification

Motion detection, Video tampering, Scene changing, Network disconnection, IP address conflict, Illegal access, Storage anomaly

20 Users

iPhone, iPad, Android Phone

IR Range of 30 Mtr.

Micro SD Card 128GB

-30°C~+60°C , Less than 95%RH

DC12V PoE(802.3af)

<10.9W

IP67 & IK10

Metal

φ122mm×88.9mm(4.80"×3.50")

0.49Kg