
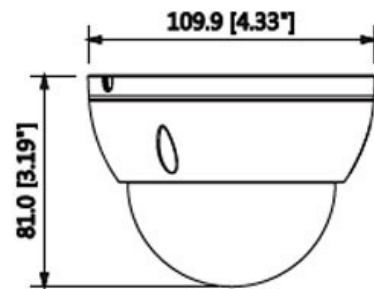


CP- UNC-VD61L3E-VMD**6MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.9" 6MP PS CMOS Image Sensor
- 20fps@6MP(3072x2048), 25/30fps@4MP(2688x1520)
- H.265 and H.264 Triple Stream encoding
- WDR, Day/Night (ICR), 2D/3DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm fixed lens (3.6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, SD Card, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

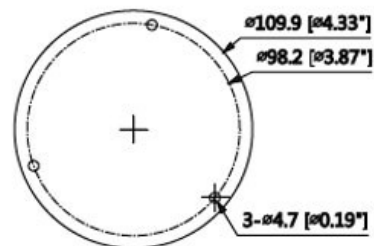

CP- UNC-VD61L3E-VMD

6MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Specification

Image Sensor	1/2.9" 6Megapixel progressive scan CMOS
Effective Pixels	3072(H) x 2048(V)
Minimum Illumination	0.04Lux/F1.6(Color,1/3s,30IRE) 0.4Lux/F1.6(Color,1/30s,30IRE) 0Lux/F1.6(IR on)
Shutter Speed	Auto/Manual, 1/3(4)~1/100000s
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Lens	2.8mm (3.6mm optional)
Gain Control (AGC)	Auto/Manual
Angle of View	H: 98° (69°), V: 67° (48°)
Video Compression	H.265+/H.265/H.264+/H.264
S/N Ratio	More than 50dB
Back Light Compensation	BLC / HLC / WDR(120dB)
Video Streaming	Main Stream: 6MP (1~20fps), 4MP(1~25/30fps), Sub Stream: D1(1~25/30fps), Third Stream: 1080P(1~25/30fps)
Resolution	6MP(3072x2048)/5MP(3072x1728)/ 5MP(2592x1944)/ 4MP(2688x1520)/ 3MP(2048x1536)/ 3MP(2304x1296)/ 1080P(1920x1080)/1.3M(1280x960)/ 720P(1280x720)/ D1 (704x576/704x480)/CIF(352x288/352x240)
Digital Zoom	16x
Motion detection	Off / On (4 Zone, Rectangle)
Privacy Mask	Off / On (4 Area, Rectangle)
ICR	Auto (ICR)/Color/B/W
ROI	Off / On (4 Zone)
Audio Input	1 Ch.
Audio Output	1 Ch.
Audio Compression	G.711a/ G.711Mu/ AAC/ G.726
Alarm IN	1 channel In: 5mA 5VDC
Alarm Out	1 channel Out: 300mA 12VDC
Bit Rate	H.264: 24K ~ 10240Kbps, H.265: 14K ~ 9984Kbps
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP;FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI
Smart Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
Ethernet	RJ-45 (10/100Base-T)



 **CP- UNC-VD61L3E-VMD****6MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Feature**

User Account

IR

Smart Phone

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

20 Users

IR Range of 30 Mtr.

IOS, Android

Micro SD, Max 128GB

-30°C~+60°C, Less than 95% RH

DC12V, PoE (802.3af)

<5.5W

IP67 & IK10

Φ109.9mm×81mm

0.41kg