


CP- UNC-VE4K081ZL5E-VMD**4K Full HD IR Vandal Dome Camera - 50Mtr.****Main Features**

- 1/2.5" 8MP Progressive Scan CMOS
- 15fps@4K, 25/30fps@3M
- H.265 and H.264 triple-stream encoding
- WDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.7mm ~12mm motorized lens
- IR Range of 50 Mtrs, IP67, IK10, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

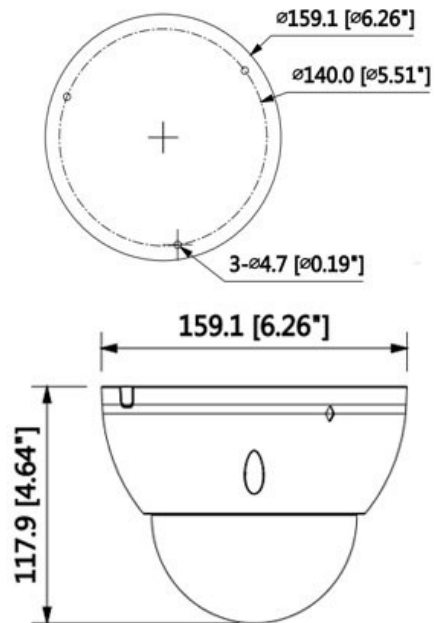

CP- UNC-VE4K081ZL5E-VMD

4K Full HD IR Vandal Dome Camera - 50Mtr.



Feature

Image Sensor

Effective Pixels

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control (AGC)

Angle of View

Back Light Compensation

Video Compression

S/N Ratio

Video Streaming

Resolution

Video Output

Digital Zoom

Motion detection

Privacy Mask

ICR

ROI

Audio Input

Audio Output

Audio Compression

Alarm IN

Alarm Out

Bit Rate

Protocol

Smart Detection

Ethernet

User Account

Specification

1/2.5" 8MP Progressive scan CMOS

3840(H)x2160(V)

0.05Lux/F1.4 (Color,1/3s,30IRE), 0.2Lux/F1.4 (Color,1/30s,30IRE), 0Lux/F1.4(IR on)

Auto/Manual, 1/3~1/100000s

Auto/Natural/Street Lamp/Outdoor/Manual

2.7mm~12mm Lens

Auto/Manual

H:110°~40°, V:58°~23°

BLC / HLC / WDR

H.265+/H.265/H.264+/H.264

More than 50dB

Main Stream: 4K(1~15fps)/ 3M(1~25/30fps) Sub Stream: D1(1~25/30fps) Third Stream: 720P(1~25/30fps)

4K(3840x2160)/6M(3072x2048)/5M(2560x1920)/ 3M(2048x1536)/3M(2304x1296)/ 1080P(1920x1080)/ 1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)

1 Port

16x

Off / On (4 Zone, Rectangle)

Off / On (4 Area, Rectangle)

Auto (ICR)/Color/B/W

Off / On (4 Zone)

1 Channel

1 Channel

G.711a/ G.711Mu/ AAC/ G.726

1 channel In: 5mA 5VDC

1 channel Out: 300mA 12VDC

H.264: 24K ~ 10240Kbps, H.265: 14K ~ 9984Kbps

HTTP; HTTPs; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI

Tripwire, Intrusion, Object Abandoned/Missing, Face detection

RJ-45 (10/100Base-T)

10/ 20 Users



CP- UNC-VE4K081ZL5E-VMD**4K Full HD IR Vandal Dome Camera - 50Mtr.****Feature**

Smart Phone

IR

Micro SD

No. of IR LEDs

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

iPhone, iPad, Android Phone

IR Range of 50 Mtr.

Micro SD card 128GB

3 IR

-30° C ~ +60° C, Less than 95% RH

DC12V, AC24V, ePoE

<15W

IP67 & IK10

Φ159.1mm×117.9mm

0.95 kg