
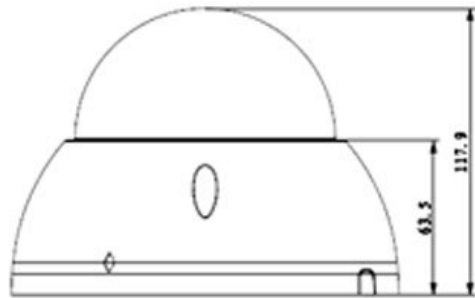


CP- UNC-VH4K121ZL5-VM**4K Full HD IR Vandal Dome Camera - 50Mtr.****Main Features**

- 1/1.7" 12Megapixel progressive scan CMOS
- 20fps@12M(4000×3000),25/30fps@4K(3840×2160)
- H.265 and H.264 triple-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 4.1mm ~16.4mm motorized lens
- IR Range of 50 Mtrs, IP67, IK10, Micro SD, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP-UNC-VH4K121ZL5-VM

4K Full HD IR Vandal Dome Camera - 50Mtr.

Feature	Specification
Image Sensor	1/1.7" 12Megapixel progressive scan CMOS
Minimum Illumination	0.02Lux/F1.53(Color), 0Lux/F1.53(IR on)
Shutter Speed	Auto/Manual, 1/3(4)~1/100000s
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Gain Control(AGC)	Auto/Manual
Lens	4.1mm~16.4mm
Back Light Compensation	BLC / HLC / DWDR/ SSA
S/N Ratio	More than 50dB
Video Compression	H.265/H.264
Resolution	6M(3072x2048)/ 5M(2560x1920)/3M(2048x1536)/ 3M(2304x1296)/1080P(1920x1080)/ 1.3M(1280x960)/720P(1280x720)/ D1(704x576/704x480) /VGA(640x480)/ CIF(352x288/342x240)
Frame Rate	Main Stream: 12M(1~20fps)/ 4K(1~25/30fps), Sub Stream :D1/CIF(1 ~ 25/30fps),Third Stream:1080P/720P/D1(1 ~ 25/30fps)
Motion detection	Off / On (4 Zone, Rectangle)
Privacy Mask	Off / On (4 Area, Rectangle)
ICR	Auto(ICR)/Color/B/W
ROI	Off / On (4 Zone)
Audio Input	1 Channel
Audio Output	1 Channel
Audio Compression	G.711a/G.711Mu/AAC/ G.726
Alarm IN	1 Channel
Alarm Out	1 Channel
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Smart Detection	Tripwire, Intrusion,Scene change Missing/Abandoned Audio detect
Ethernet	RJ-45 (10/100Base-T)
User Account	10 Users/20 Users
Smart Phone	iPhone, iPad, Android
IR	IR Range of 50 Mtr.
Special Features	Defog, Flip, Mirror
Micro SD	Micro SD, Max 128GB

 **CP- UNC-VH4K121ZL5-VM****4K Full HD IR Vandal Dome Camera - 50Mtr.****Feature**

Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

-40° C ~ +60° C (-40° F ~ +140° F) / Less than 95% RH
DC12V, AC24V, PoE (802.3at)(Class 4)
<18W
IP67 & IK10
Φ159.1mm × 117.9mm(Φ6.26"×4.64")
0.96kg