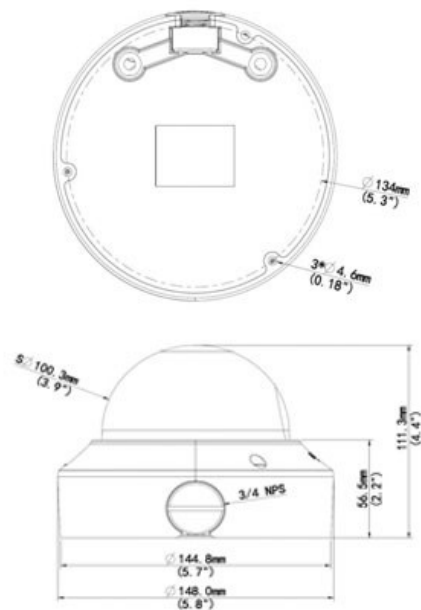


CP-VNC-V41ZR3-VMD**4 MP WDR Array Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max: 25fps@4MP(2560×1440), Max: 20fps@4MP(2592×1520)
- Ultra H.265, H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR, Corridor mode, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized Lens
- IR Range of 30 Mtrs, Micro SD Card, IP67, IK10, PoE
- Support Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**Instastream****CE FC** **RoHS**
COMPLIANT

CP- VNC-V41ZR3-VMD

4 MP WDR Array Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 Angle of View
 S/N Ratio
 Back Light Compensation
 Video Streaming
 Resolution
 Video Output
 Frame Rate
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Audio
 Alarm IN
 Alarm Out
 Protocol
 Smart Detection
 General Function

Specification

1/3" 4MP Progressive scan CMOS
 Colour: 0.005Lux (F1.4, AGC ON) 0Lux with IR
 Auto/Manual, 1 ~ 1/100000s
 Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
 2.8~12mm Motorized Lens
 Auto/Manual
 Ultra H.265, H.265, H.264, MJPEG
 91.0° ~ 27°(H), 54.4° ~ 13.7°(V), 118.3° ~ 33.2°(O)
 >55dB
 BLC/ HLC/ WDR(120dB)
 Triple
 2592 × 1520
 1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
 Main Stream: 4MP (2560x1440), Max 25fps; 4MP (2592x1520), Max 20fps; 3MP (2048x1520), Max 30fps; Sub Stream: 2MP (1920x1080), Max 30fps; Third Stream: D1 (720x576), Max 30fps
 Up to 4 areas
 Up to 8 areas
 IR-cut filter with auto switch (ICR)
 Up to 8 areas
 impedance 35 kΩ; amplitude 2 V [p-p]
 impedance 600 Ω; amplitude 2 V [p-p]
 G.711
 Two-way audio Supported
 1 IN
 1 Out
 IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, ONVIF (Profile S, Profile G, Profile T), API
 Intrusion, cross line, motion detection, Face detection, Audio detection, Defocus, Scene Change, Object Left, Object Moving, People counting
 Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication

CP- VNC-V41ZR3-VMD**4 MP WDR Array Vandal Dome Camera - 30Mtr.****Feature**

Bit Rate
Ethernet
Wavelength
IR
OSD
Special Features
Micro SD
ANR Technology
Flip
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Casing
Dimension
Weight

Specification

128 Kbps~16 Mbps
1 RJ45 10M/100M Base-TX Ethernet
850nm
Array Range of 30 Mtr., Smart IR
Up to 8 OSDs
Digital De-Fog, Dewarping
Micro SD, up to 256GB
Supports
Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise
-40°C ~ +60°C (-40°F ~ 140°F)
≤ 95% RH (non-condensing)
DC 12V±25%, PoE (IEEE 802.3af)
Max 7.2W
IP67 & IK10
Shield: PC , Bottom plate: Metal
Φ148 x 111.3 mm (Ø5.8" x 4.4")
0.75 kg