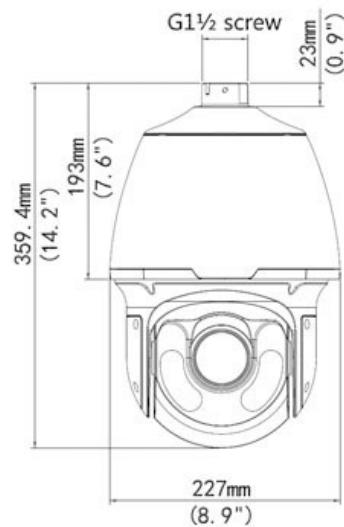


CP- VNP-3021L15**2MP 30x Full HD IR Network PTZ Camera - 150 Mtr.****Main Features**

- 1/2.8" 2MP Progressive scan, CMOS
- Powerful 30x Optical Zoom and 16x Digital Zoom
- DWDR, 2D/3D-DNR, ROI, Digital Defog, EIS, AWB, AGC, BLC, HLC
- Ultra 265,H.265, H.264, MJPEG Triple streams Encoding
- Up to 1024 Presets,16 Patrol, Pattern
- Max 240°/s pan speed, 360° endless pan rotation
- Built-in 1/1 alarm in/out, IP66
- IR Range of 150 Mtr., Micro SD Card
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**Instastream**

CP- VNP-3021L15**2MP 30x Full HD IR Network PTZ Camera - 150 Mtr.****Feature**

Image Sensor

Effective Pixels

S/N Ratio

Minimum Illumination

Focal Length

White Balance

Focus Control

Iris Control

Angle of View

Electronic Shutter

AGC control

Back Light Compensation

Optical Zoom

Digital Zoom

Pan Travel

Tilt Travel

Presets

Preset Speed

Special Features

Privacy Masking

Day/Night: IR Cut Filter

Video Compression

Video Streaming

Audio Streaming

Audio Compression

Audio In

Audio Out

Alarm

ROI

Motion Detection

Networking

Specification

1/2.8" 2MP PS CMOS

1920(H) x 1080(V)

>52dB

Colour: 0.001Lux (F1.5, AGC ON) 0Lux with IR

4.5 ~ 135 mm

Auto / Manual

Auto / Manual

Auto/Manual; F1.5 ~ F4.0

56.7° ~ 2.28°(H), 31.89° ~ 1.28°(V), 69.74° ~ 2.69°(O)

Auto/Manual; shutter time: 1 ~ 1/100000s

Auto / Manual

BLC / HLC / DWDR

30x

16x

360° endless, Pan Speed: 0.1°/s ~ 240°/s

-15° ~ 90°(auto reverse), Tilt Speed: 0.1° ~ 160°/sec

1024

Pan: 300° /s; Tilt: 240° /s

IR Range upto 150m, Up to 1024 Presets, 16 Patrol, Pattern, up to 32 presets per patrol

Up to 24 areas

IR-cut filter with auto switch (ICR)

Ultra 265, H.265, H.264, MJPEG

Main Stream: 2MP (1920x1080):Max. 30 fps; Sub Stream: 2MP (1920x1080):Max. 30 fps;

Third Stream: D1 (720x576): Max. 30 fps

Two way Talk Supported

G.711

impedance 35 kΩ; amplitude 2 V [p-p]

impedance 600 Ω; amplitude 2 V [p-p]

1 In/1 Out

Up to 8 areas

Up to 4 areas

1RJ45 10M/100M Base-TX Ethernet

CP- VNP-3021L15

2MP 30x Full HD IR Network PTZ Camera - 150 Mtr.

Feature

Protocols

OSD

General Function

Memory Slot

Operating Temperature

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, ONVIF (Profile S, Profile G, Profile T), API

Up to 8 OSDs

Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication

Micro SD, up to 256GB

-40°C ~ 65°C (-40°F ~ 149°F), Humidity ≤95% RH (non-condensing)

IP66

Ø227 x 359.4 mm (Ø8.9" x 14.2")

5.28kg

AC 24V±25%, DC 24V±25%

60W