


CP- UNC-DD21L5CE-MD**2MP Full HD WDR IR Dome Camera - 50Mtr.****Main Features**

- 1/2.8" 2 MP PS CMOS Image Sensor
- 50/60fps@1080P(1920×1080)
- H.265 and H.264 Triple - stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm fixed lens (3.6mm,6mm optional)
- IR Range of 50 Mtrs, IP67, SD Card, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

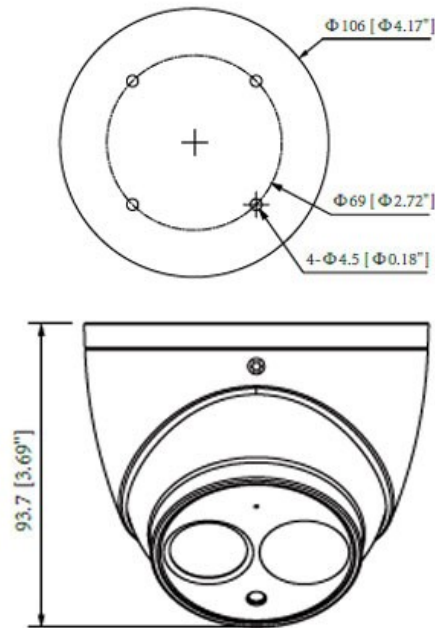

CP- UNC-DD21L5CE-MD

2MP Full HD WDR IR Dome Camera - 50Mtr.



Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Angle of View
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Digital Zoom
Motion detection
Privacy Mask
ICR
ROI
Audio Compression
Protocol
Smart Detection
Ethernet
User Account
IR
Smart Phone
Micro SD
Audio
Operating Temperature
Power Source

Specification

1/2.8" 2Megapixel progressive scan CMOS
0.007Lux/F1.6(Color,1/3s,30IRE) 0.06Lux/F1.6(Color,1/30s,30IRE) 0Lux/F1.6(IR on)
1920(H) x 1080(V)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
2.8mm (3.6mm, 6mm optional)
Auto/Manual
H:110° (87°, 51°), V:58° (48°, 30°)
H.265+/H.265/H.264+/H.264
More than 50dB
BLC / HLC / WDR(120dB)
Main Stream: 1080P/720P(1~50/60fps), Sub Stream: D1(1 ~50/60fps), Third Stream: 1080P (1~25/30fps)
1080P(1920x1080)/1.3MP(1280x960)/ 720P(1280x720)/D1(704x576/704x480)/ VGA (640x480)/CIF(352x288/352x240)
16x
Off / On (4 Zone, Rectangle)
Off / On (4 Area, Rectangle)
Auto (ICR)/Color/B/W
Off / On (4 Zone)
G.711a/ G.711Mu/ AAC/ G.726
HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI
Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
RJ-45 (10/100Base-T)
20 Users
IR Range of 50 Mtr.
IOS, Android
Micro SD, Max 128GB
Built-in Mic
-30°C~+60°C, Less than 95% RH
DC12V, ePoE



 **CP- UNC-DD21L5CE-MD****2MP Full HD WDR IR Dome Camera - 50Mtr.****Feature**

Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

<5.5W
IP67
Φ106mm x 93.7mm
0.47 Kg