


CP- VNP-2221L15

2MP 22x Full HD IR Network PTZ Camera - 150 Mtr.

INDIGO

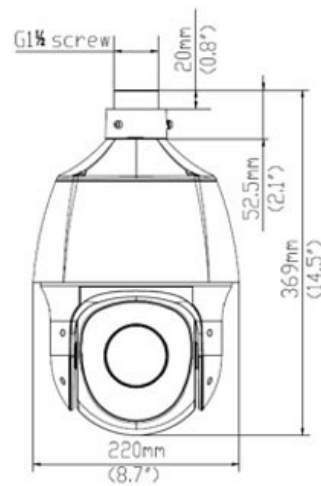

Main Features

- 1/2.9" 2MP PS CMOS Image Sensor
- Powerful 22x Optical Zoom
- Ultra 265,H.265, H.264, MJPEG Triple streams Encoding
- Up to 1024 Presets, Preset patrol, route patrol, recorded patrol
- DWDR, Day/Night (ICR), 2D/3D-DNR, EIS, Defog, AWB, AGC, BLC, HLC
- Max 240°/s pan speed, 360° endless pan rotation
- IP66
- IR Range of 150 Mtr., Smart IR, Micro SD Card
- Mobile Software: Android, iOS
- CMS Software: IVMS



CP- VNP-2221L15

2MP 22x Full HD IR Network PTZ Camera - 150 Mtr.



Feature

Image Sensor

Effective Pixels

S/N Ratio

Minimum Illumination

Focal Length

White Balance

Focus Control

Iris Control

Angle of View

Electronic Shutter

AGC control

Back Light Compensation

Optical Zoom

Digital Zoom

Pan Travel

Tilt Travel

Presets

Preset Speed

Special Features

Home Position

Privacy Masking

Day/Night: IR Cut Filter

Video Compression

Video Streaming

Motion Detection

ROI

Networking

IVS

Protocols

OSD

Specification

1/2.9" PS, 2 MP, CMOS

1920(H) x 1080(V)

>55 dB

Colour: 0.06 lux (F1.5,AGC ON) 0 lux with IR

5.2~ 114.4 mm

Auto / Manual

Auto / Manual

F1.5

54.43° (wide) ~ 3.45° (tele)

Auto/Manual, shutter time: 1/6 s ~ 1/100000 s

Auto / Manual

BLC/ HLC/ DWDR

22x

Supports

360° endless, Pan Speed: 0.1°/s ~ 240°/s

-15° ~ 90°(auto reverse), Tilt Speed: 0.1° ~ 80°/s

1024

Pan: 300° /s; Tilt: 80° /s

IR Range upto 150m, Digital Defog, Up to 1024 Presets, Preset patrol, route patrol, recorded

Supported

Up to 8 areas

IR-cut filter with auto switch (ICR)

Ultra 265,H.265, H.264, MJPEG

Main Stream: 2MP (1920x1080):Max. 30 fps; Sub Stream: 2MP (1920x1080):Max. 30 fps;

Third Stream: D1 (720x576): Max. 30 fps

Up to 4 areas

Up to 8 areas

10M/100M Base-TX Ethernet

Intrusion, cross line, motion detection, Face detection, People counting

IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP,

UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, ONVIF (Profile S, Profile G), API

Up to 8 OSDs



CP- VNP-2221L15

2MP 22x Full HD IR Network PTZ Camera - 150 Mtr.



Feature

General Function

Operating Temperature

Memory Slot

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication

-40°C ~ +65°C (-40°F ~ 149°F), Humidity: 10%~90% RH (non-condensing)

Micro SD, up to 128 GB

IP66

Φ215mm×344mm(Φ8.5" x13.5")

3kg

DC 12V±10%

24 W